




# GILLETTE GENERATORS


**LIQUID COOLED NAT. GAS ENGINE GENERATOR SET**

PRIME MODEL  
**PR-3000**  
60 HERTZ

Model	PRIME 105°C RISE NATURAL GAS	
	HZ	
<b>PR-3000-60 HERTZ</b>	60	300

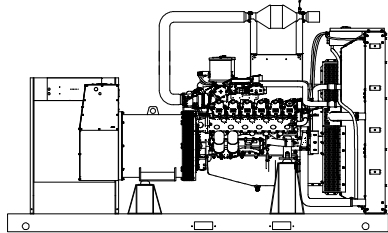

**“OPEN” GEN-SET**  
There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation. Silencer not supplied, as installation requirements are not known. However, this item is available as optional equipment.

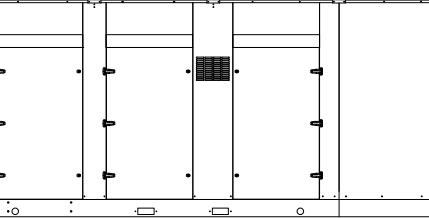

**“LEVEL 2” HOUSED GEN-SET**  
Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



**UL1446, UL508, UL142, UL498**



**NFPA 110, 99, 70, 37**  
All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



**NEC 700, 701, 702, 708**



**NEMA ICS10, MG1, ICS6, AB1**



**ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05**



**ASCE 7-05 & 7-10**  
All generator sets meet 180 MPH rating.



**EPA 40CFR Part 60, 1048, 1065, 1068**

GENERATOR MODEL	VOLTAGE		PH	HZ	NATURAL GAS FUEL		POWER LEAD CONNECTIONS
	L-N	L-L			105°C RISE PRIME RATING		
					KW/KVA	AMP	
<b>PR-3000-3-2</b>	120	208	3	60	300/375	1042	12 LEAD LOW WYE
<b>PR-3000-3-3</b>	120	240	3	60	300/375	903	12 LEAD HIGH DELTA
<b>PR-3000-3-4</b>	277	480	3	60	300/375	452	12 LEAD HIGH WYE
<b>PR-3000-3-5</b>	127	220	3	60	300/375	985	12 LEAD LOW WYE
<b>PR-3000-3-16</b>	346	600	3	60	300/375	361	4 LEAD WYE 3PH

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at (.8) power factor. 105°C “PRIME RATINGS” are strictly for gen-sets provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation of PRIME RATED systems. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based on 105°C (prime) R/R winding temperature, within a maximum 40°C ambient condition. Specifications & ratings are subject to change without prior notice.



# APPLICATION AND ENGINEERING DATA FOR MODEL PR-3000-60 HZ

## COOLING SYSTEM

Type of System ..... Pressurized, closed recovery  
 Coolant Pump ..... Pre-lubricated, self-sealing  
 Cooling Fan Type (no. of blades) ..... Pusher (12)  
 Fan Diameter inches (mm)..... 52" (1321)  
 Ambient Capacity of Radiator °F (°C)..... 125 (51.6)  
 Engine Jacket Coolant Capacity Gal (L)..... 11.0 (50.0)  
 Radiator Coolant Capacity Gal. (L) ..... 43 (163)  
 Maximum Restriction of Cooling Air Intake  
 and discharge side of radiator in. H<sub>2</sub>O (kpa)..... 0.5 (.125)  
 Water Pump Capacity gpm (L/min)..... 174 (660)  
 Heat Reject Coolant: Btu/min (kw) ..... 20,400 (359)  
 Low Radiator Coolant Level Shutdown.....Standard  
 Note: Coolant temp. shut-down switch setting at 230°F (110°C) with 50/50  
 (water/antifreeze) mix.

## AIR REQUIREMENTS

Combustion Air, cfm (m<sup>3</sup>/min) ..... 664 (19.4)  
 Radiator Air Flow cfm (m<sup>3</sup>/min)..... 19,500 (552)  
 Heat Rejected to Ambient:  
 Engine: kw (btu/min)..... 55 (3121)  
 Alternator: kw (btu/min)..... 21 (1195)

## EXHAUST SYSTEM

Exhaust Outlet Size..... (2) 4"  
 Max. Back Pressure, in. hg (KPA)..... 3.0 (10.2)  
 Exhaust Flow, at rated kw: cfm (m<sup>3</sup>/min) ..... 2366 (67.0)  
 Exhaust Temp., at rated kw: °F (°C) ..... 1350 (732)  
 Engines are EPA certified for Natural Gas.

## SOUND LEVELS MEASURED IN dB(A)

	Open Set	Level 2 Encl.
Level 2, Critical Silencer	94	80

Note: Open sets (no enclosure) has (2) optional silencer system choices due to unknown job-site applications. Level 2 enclosure has installed critical silencer with upgrade to hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

## DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft.(305m) above 3000 ft. (914m) from sea level

## DERATE GENERATOR FOR TEMPERATURE

2% per 10°F(5.6°C) above 85°F (29.4°C)

## DIMENSIONS AND WEIGHTS

	Open Set	Level 2 Enclosure
Length in (cm).....	168 (427)	210 (534)
Width in (cm).....	82 (208)	82 (208)
Height in (cm).....	90 (228)	100 (254)
3 Ø Net Weight lbs (kg).....	9150 (4150)	11650 (5284)
3 Ø Ship Weight lbs (kg).....	9550 (4332)	12050 (5466)

# DEEP SEA 7420 DIGITAL MICROPROCESSOR CONTROLLER



### Deep Sea 7420

The "7420" controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The "7420" controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAr, kVAh, kVArh)

This controller includes the expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional "WebNet" gateway interface module. This device will allow comprehensive monitoring of the generator via the cloud including identification, location, and status. Some advantages of this module include: reduced site visits and maintenance costs • remote fuel management • fault analysis • asset tracking • automatic system alerts • maximized system up-time.

# STANDARD FEATURES FOR MODEL PR-3000-60 HZ

## CONTROL PANEL:

Deep Sea 7420 digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure                      • Engine fail to start
- High engine temp                      • Engine over speed
- Low Radiator Level                      • Engine under speed
- Three auxiliary alarms                      • Over & under voltage
- Battery fail alarm

Also included is tamper-proof engine hour meter

## ENGINE:

Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump • Thermostat • Pusher fan and guard • Exhaust manifold • 24 VDC battery charging alternator • Flexible exhaust connector • "Isochronous" duty, electronic governor • Secondary dry fuel regulator • Dry fuel lock-off solenoid • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator drain hose.

## AC GENERATOR SYSTEM:

AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

## VOLTAGE REGULATOR:

½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation


## DC ELECTRICAL SYSTEM:

Battery tray • Battery cables • Battery hold down straps • 2-stage battery float charger with maintaining & recharging automatic charge stages

## WEATHER/SOUND PROOF ALUMINUM HOUSING CORROSION RESISTANT PROTECTION CONSISTING OF:

- 9 Heated And Agitated Wash Stages
- Zinc Phosphate Etching-coating Stage
- Final Baked On Enamel Powder Coat
- 18/8 Stainless Steel Hardware

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

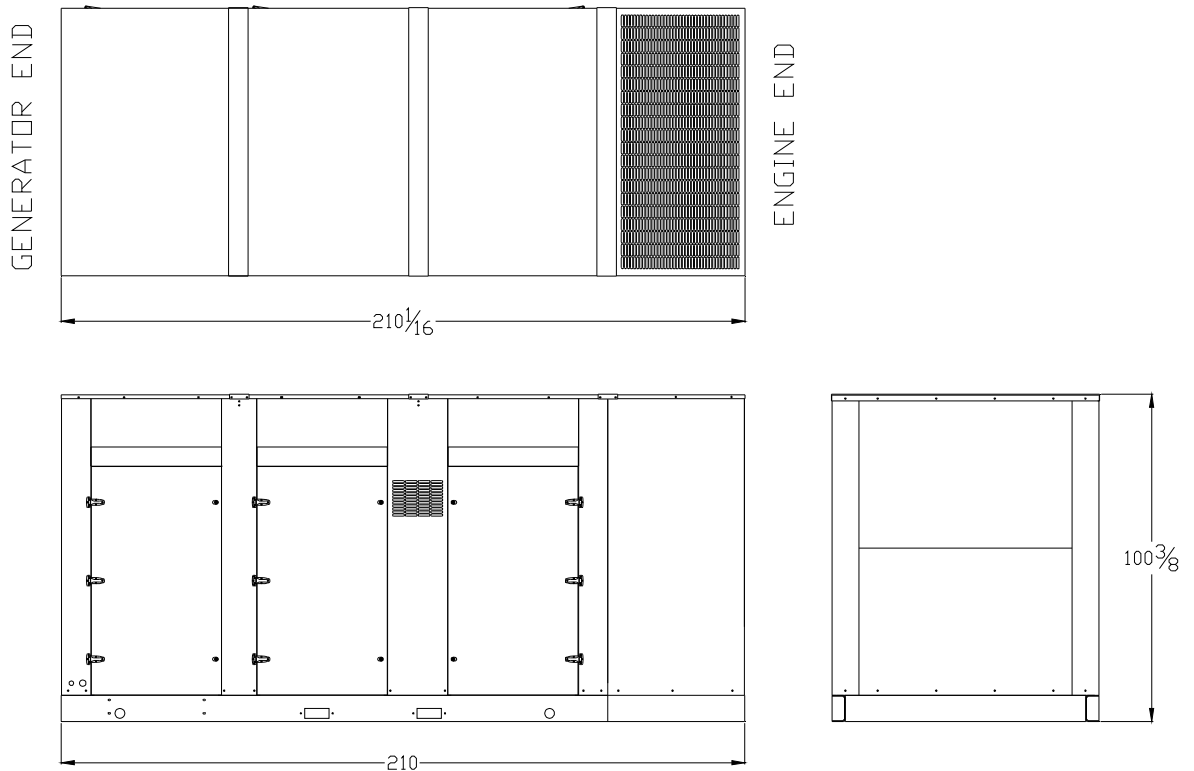





# HEAVY-DUTY

# 18.3L ENGINE

## INDUSTRIAL STATIONARY

## Product Overview

The PSI HD 18.3L is a U.S. EPA-certified natural gas and propane engine developed from the block up to be a reliable and durable power unit. Built upon a proven marine-diesel grade block, the 10-cylinder in-line, turbocharged and after-cooled engine features replaceable wet liners and water-cooled exhaust.

Superior engine performance is provided by an ECU that integrates and coordinates all critical functions including: Governor, Variable Ignition Timing, Air Fuel Ratio Control, Knock Suppression and Engine Protection.

The PSI HD product lineup has six models with displacements of 8.1L, 11.1L, 14.6L, 18.3L and 21.9L. These engines are an extension of the PSI product line, which is based upon blocks from 650cc to 8.8L. All PSI engines feature the same fuel systems and controls, simplifying your application development and support.



## FEATURES

- U.S. EPA-Certified and CARB-Compliant
- Dual Fuel with Automatic Change-Over
- 50C Ambient Cooling Capacity
- 3-Way Catalytic Converter
- Air Filtration
- UL2200-Compliant or Listed Components
- MasterTrak Telematics service (included for 1 year)

**MAXIMUM  
PERFORMANCE  
NO COMPROMISES**

**POWER & PERFORMANCE • EMISSION-CERTIFIED • FUEL-FLEXIBLE**






## 18.3L Industrial Stationary Engine

Displacement	1,115 cid	18,275 cc
Compression Ratio	10.5:1	
Bore & Stroke	5.04 in x 5.59 in	128 mm x 142 mm
kWe	350@1,800 rpm (Natural Gas)	280@1,500 rpm (Natural Gas)
Emission-Certified	EPA, CARB – Industrial Stationary	
Fuel Types	Natural Gas / Propane	

### GENERAL DATA

- Water-cooled, turbo-charged, air-to-air inter-cooled, stoichiometric, replaceable wet cylinder liners
- Cast iron block & heads, 10.5:1 compression ratio, overhead valve/2V configuration
- Crankshaft gear-driven oil system with cartridge-type filter, belt-driven centrifugal water pump
- Full ECU engine control including: coil-on-plug variable timing ignition, electronic governor and fuel-air ratio control
- Engine protection for oil pressure, coolant level, coolant temperature, fuel pressure, over-speed
- Complete fuel system for single fuel (NG/LP) operation with closed-loop control
- Alternator (45A/24VDC)
- Starter (24VDC)
- CANBUS J1939 interface

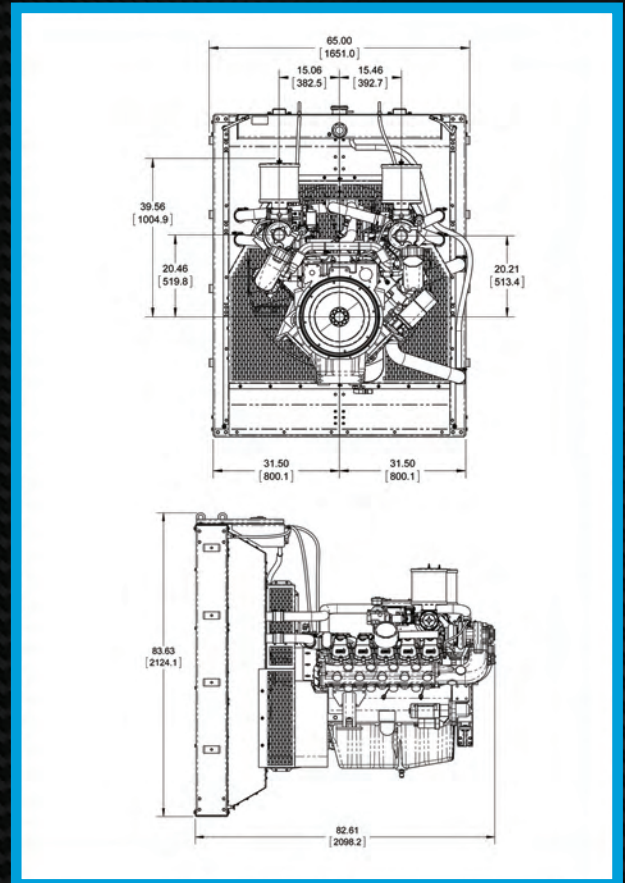

Power shown is gross engine power and has been corrected to SAE J1995. Actual installed power levels may vary depending on the application and OEM supplied components.

Information may vary with application. All specifications listed are based on the latest product information available at the time of publication. The right is reserved to make changes at any time without notice.

201 Mittel Drive, Wood Dale, IL 60191  
T: 630-350-9400 F: 630-350-9900  
[www.psiengines.com](http://www.psiengines.com)

## S4L1D-F41 Wdg.311 - Technical Data Sheet

### Standards

Stamford industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System					
<b>AVR Type</b>	AS440	MX341	MX321		
<b>Voltage Regulation</b>	± 1%	± 1%	± 0.5%		with 4% Engine Governing
<b>Excitation Type</b>	Self-Excited	PMG	PMG		

<b>No Load Excitation Voltage (V)</b>	10 - 8
<b>No Load Excitation Current (A)</b>	0.7 - 0.5
<b>Full Load Excitation Voltage (V)</b>	41 - 37.5
<b>Full Load Excitation Current (A)</b>	2.3 - 2.1
<b>Exciter Time Constant (seconds)</b>	0.105

# STAMFORD

## S4L1D-F41 Wdg.311

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Lap							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	13.7389							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air	0.76 m <sup>3</sup> /sec				0.92 m <sup>3</sup> /sec			
Voltage Star	380	400	415	440	416	440	460	480
kVA Base Rating (Class H) for Reactance Values	400	415	415	400	455	500	500	520
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.71	2.54	2.36	2.02	3.28	3.23	2.95	2.82
X'd Dir. Axis Transient	0.18	0.17	0.16	0.13	0.18	0.18	0.16	0.16
X''d Dir. Axis Subtransient	0.13	0.13	0.12	0.10	0.13	0.13	0.12	0.11
Xq Quad. Axis Reactance	2.34	2.19	2.03	1.74	2.90	2.84	2.60	2.49
X''q Quad. Axis Subtransient	0.31	0.29	0.27	0.23	0.42	0.42	0.38	0.36
XL Stator Leakage Reactance	0.06	0.05	0.05	0.04	0.07	0.07	0.07	0.06
X2 Negative Sequence Reactance	0.22	0.21	0.20	0.17	0.29	0.29	0.26	0.25
X0 Zero Sequence Reactance	0.09	0.08	0.08	0.07	0.10	0.10	0.09	0.08
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.26	3.05	2.83	2.43	3.94	3.87	3.54	3.38
X'd Dir. Axis Transient	0.21	0.19	0.18	0.15	0.21	0.21	0.19	0.18
X''d Dir. Axis Subtransient	0.16	0.15	0.14	0.12	0.16	0.15	0.14	0.13
Xq Quad. Axis Reactance	2.41	2.26	2.10	1.80	2.98	2.93	2.68	2.56
X''q Quad. Axis Subtransient	0.37	0.35	0.32	0.28	0.51	0.50	0.46	0.44
XL Stator Leakage Reactance	0.06	0.06	0.05	0.05	0.08	0.08	0.07	0.07
Xlr Rotor Leakage Reactance	0.10	0.09	0.09	0.07	0.11	0.11	0.10	0.10
X2 Negative Sequence Reactance	0.27	0.25	0.23	0.20	0.35	0.34	0.31	0.30
X0 Zero Sequence Reactance	0.10	0.10	0.09	0.08	0.11	0.11	0.10	0.10



# STAMFORD®

## S4L1D-F41 Wdg.311

Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.08	
T''d SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T''q SUB-TRANSTIME CONST.	0.009	
Resistances in Ohms ( $\Omega$ ) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.0073	
Rotor Winding Resistance (Rf)	1.37	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.009125	
Negative Sequence Resistance (R2)	0.010512	
Zero Sequence Resistance (R0)	0.009125	
Saturation Factors	400V	480V
SG1.0	0.36	0.38
SG1.2	1.46	1.52
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0.5, 1	N/A
Moment of Inertia	5.4292kgm <sup>2</sup>	N/A
Weight Wound Stator	535kg	N/A
Weight Wound Rotor	463kg	N/A
Weight Complete Alternator	1160kg	N/A
Shipping weight in a Crate	1230kg	N/A
Packing Crate Size	155 x 87 x 107 (cm)	N/A
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	N/A
Bearing Non-Drive End	Ball 6314	N/A









# STAMFORD®

## S4L1D-F41 Wdg.311

### THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

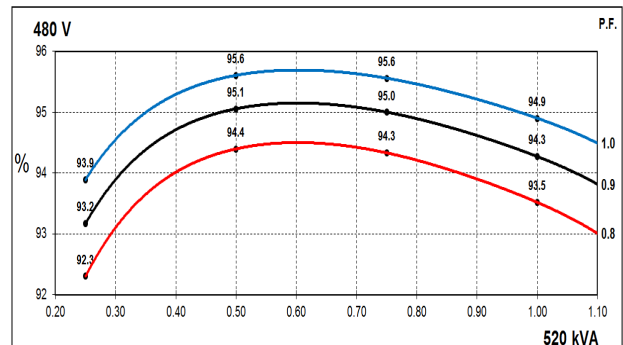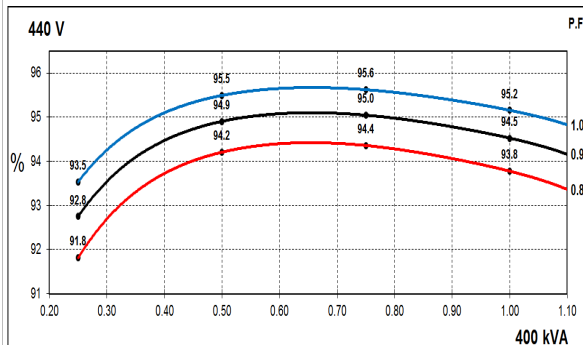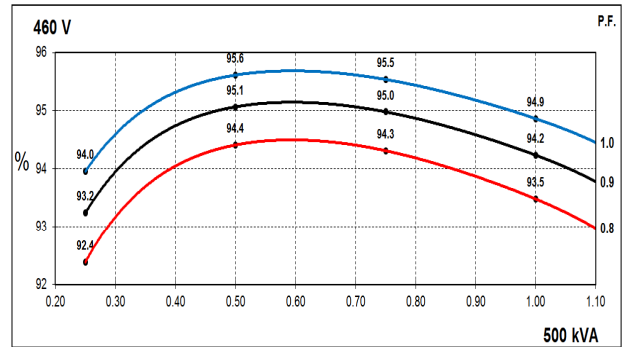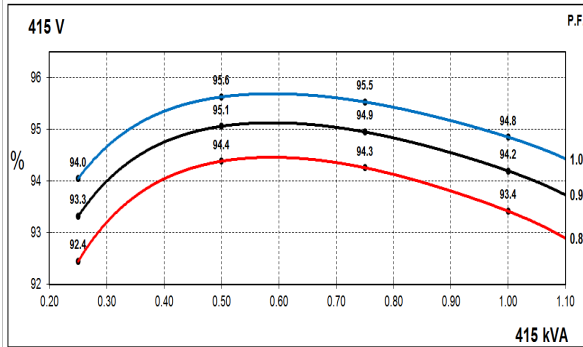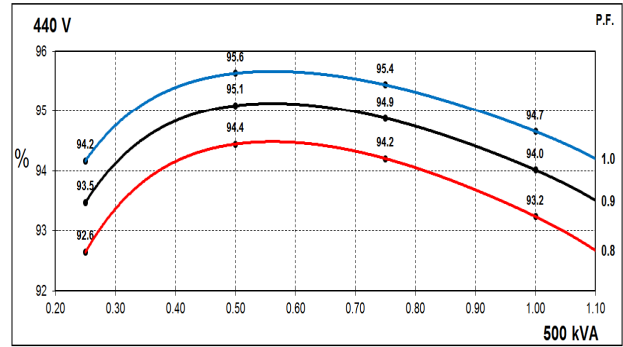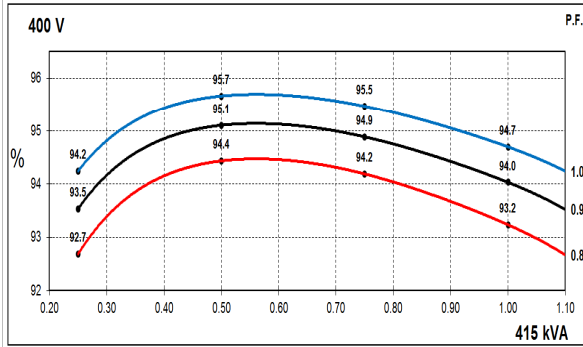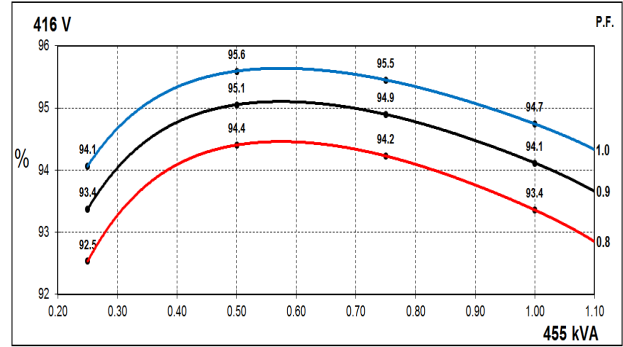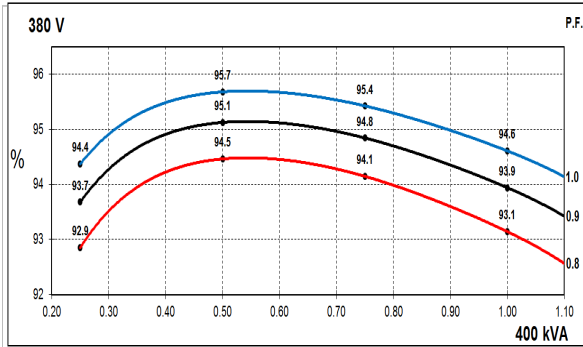


# STAMFORD


S4L1D-F41 Wdg.311

## Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

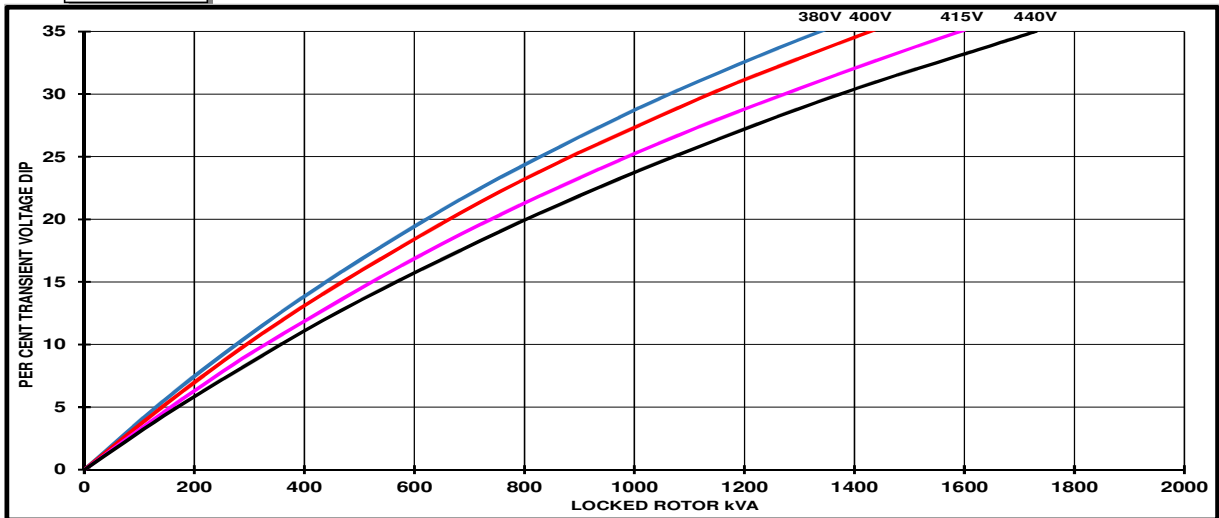

**60Hz**

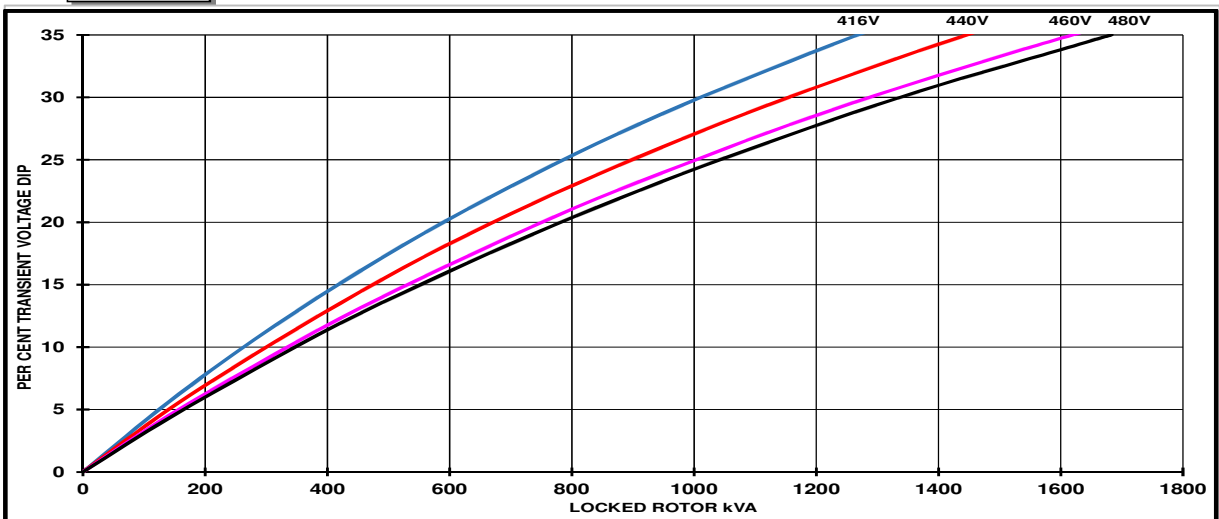

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	




# STAMFORD


S4L1D-F41 Wdg.311

## Locked Rotor Motor Starting Curves - Self Excited

**50Hz**

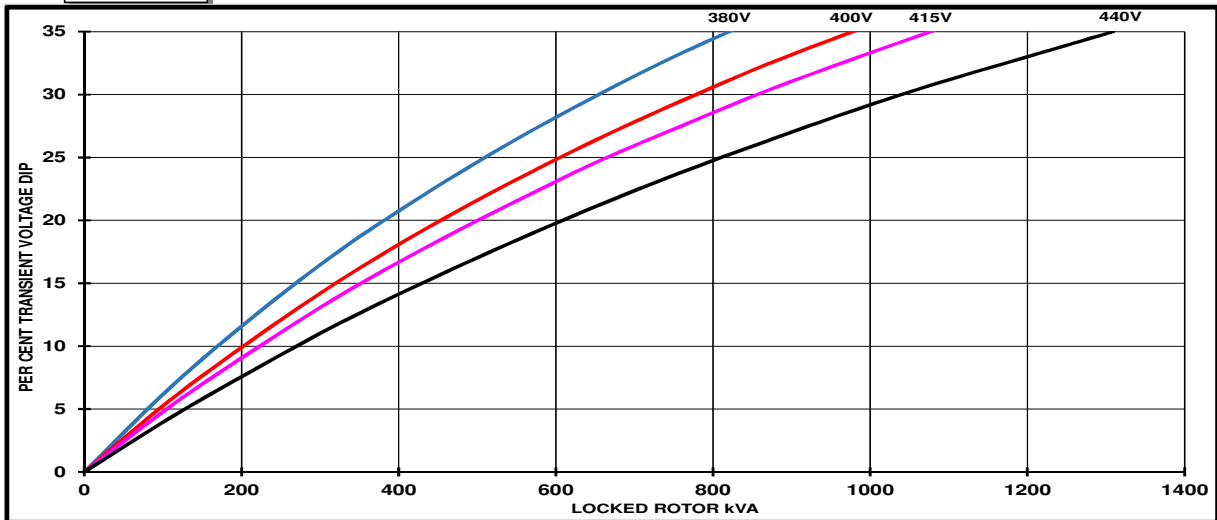

**60Hz**

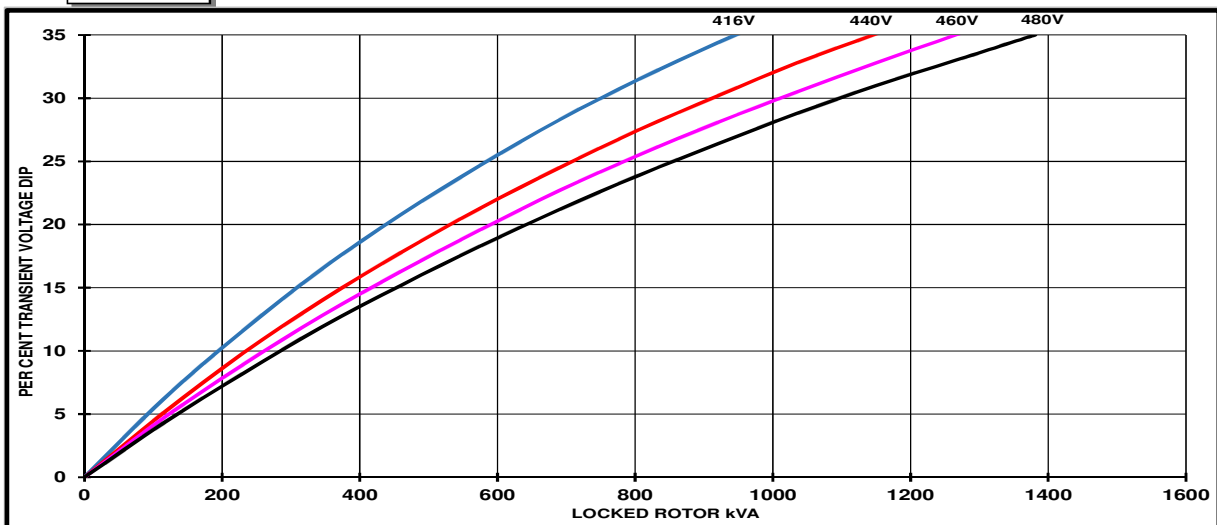


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

# STAMFORD

S4L1D-F41 Wdg.311


## Three-phase Short Circuit Decrement Curve

**50Hz**

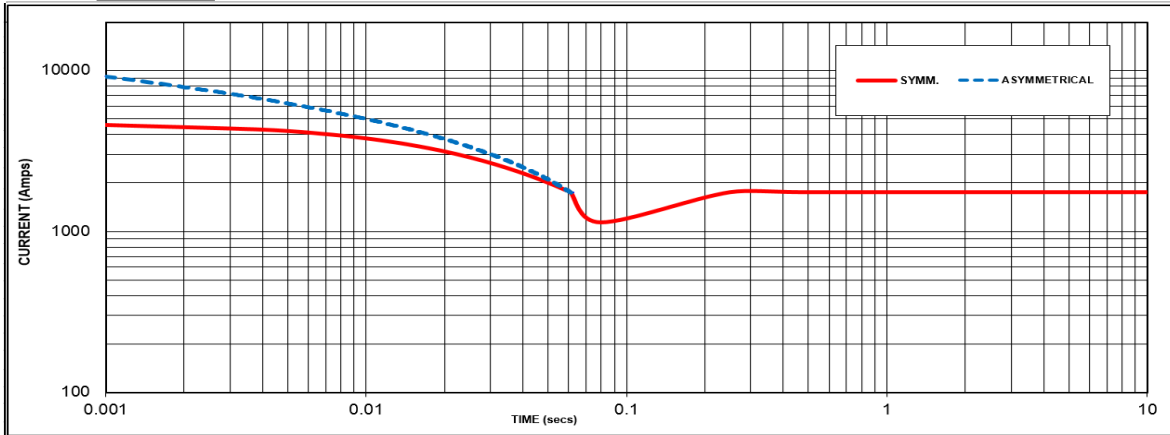

Sustained Short Circuit = 1750 Amps

**60Hz**

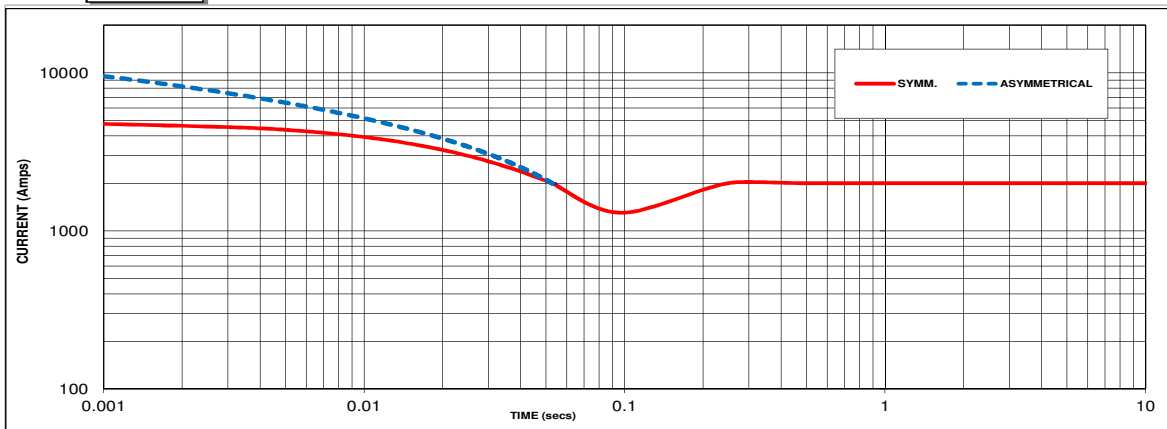

Sustained Short Circuit = 2000 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :  
 Parallel Star = Curve current value X 2  
 Series Delta = Curve current value X 1.732

# STAMFORD


S4L1D-F41 Wdg.311

## Typical Alternator Operating Charts

**400V/50Hz**

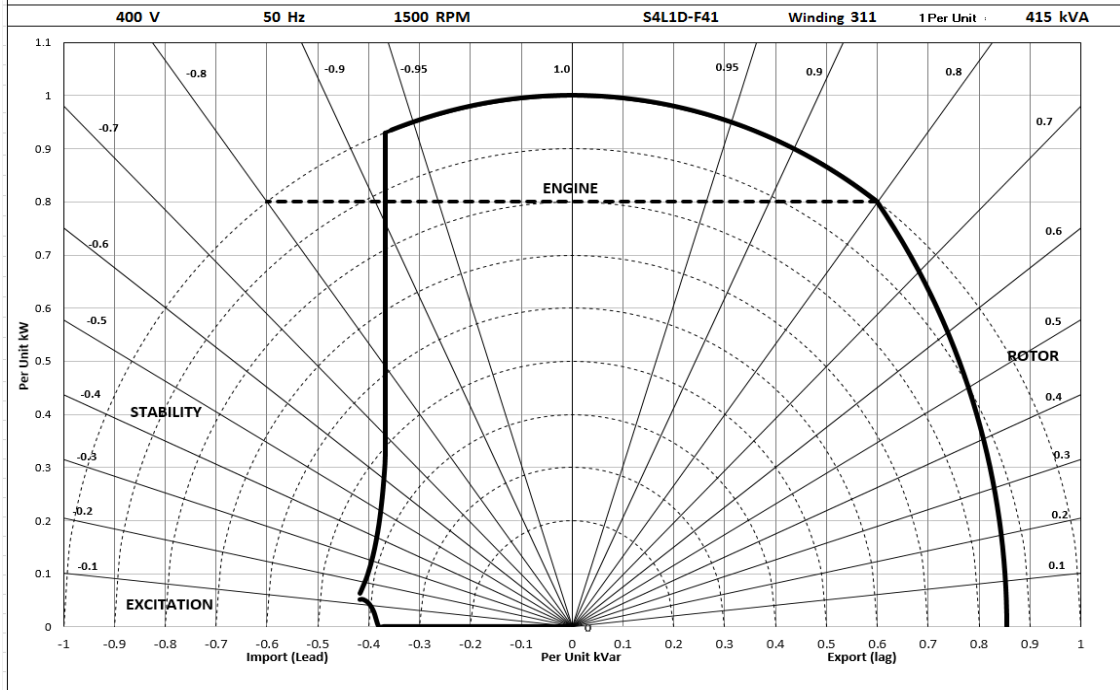

**480V/60Hz**

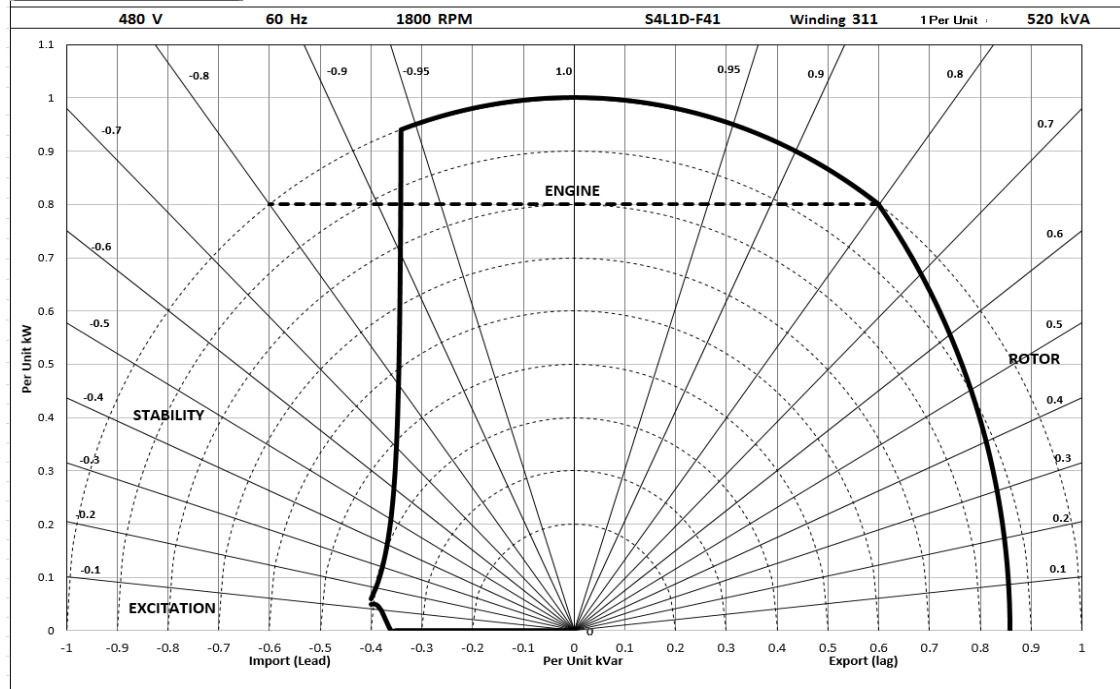



# STAMFORD®

## S4L1D-F41 Wdg.311

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
<b>50 Hz</b>	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	425	465	455	440	415	445	445	430	400	415	415	400	370	380	380	370
	kW	340	372	364	352	332	356	356	344	320	332	332	320	296	304	304	296
	Efficiency (%)	92.8	92.6	92.9	93.4	92.9	92.9	93.1	93.5	93.1	93.2	93.4	93.8	93.5	93.6	93.8	94.0
	kW Input	366	402	392	377	357	383	383	368	344	356	355	341	317	325	324	315

<b>60 Hz</b>	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	500	550	550	575	485	535	535	555	455	500	500	520	420	465	465	480
	kW	400	440	440	460	388	428	428	444	364	400	400	416	336	372	372	384
	Efficiency (%)	92.9	92.7	93.0	93.0	93.0	92.9	93.2	93.2	93.4	93.2	93.5	93.5	93.7	93.6	93.8	93.8
	kW Input	431	475	473	495	417	461	459	476	390	429	428	445	359	398	397	409

#### De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

[news.stamford-avk.com](https://news.stamford-avk.com)

**For Applications Support:**  
[applications@cummins.com](mailto:applications@cummins.com)

**For Customer Service:**  
[service-engineers@stamford-avk.com](mailto:service-engineers@stamford-avk.com)

**For General Enquiries:**  
[info@cumminsgeneratortechnologies.com](mailto:info@cumminsgeneratortechnologies.com)

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



## S4LID-E41 Wdg.311 - Technical Data Sheet

### Standards

Stamford industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System					
<b>AVR Type</b>	AS440	MX341	MX321		
<b>Voltage Regulation</b>	± 1%	± 1%	± 0.5%		with 4% Engine Governing
<b>Excitation Type</b>	Self-Excited	PMG	PMG		

<b>No Load Excitation Voltage (V)</b>	12 - 9
<b>No Load Excitation Current (A)</b>	0.7 - 0.5
<b>Full Load Excitation Voltage (V)</b>	41 - 39
<b>Full Load Excitation Current (A)</b>	2.3 - 2.2
<b>Exciter Time Constant (seconds)</b>	0.105



# STAMFORD

## S4LID-E41 Wdg.311

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Lap							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	13.56							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air	0.8 m³/sec				0.96 m³/sec			
Voltage Star	380	400	415	440	416	440	460	480
kVA Base Rating (Class H) for Reactance Values	350	360	360	350	400	435	440	455
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.01	2.79	2.59	2.24	3.47	3.38	3.12	2.97
X'd Dir. Axis Transient	0.20	0.19	0.17	0.15	0.21	0.20	0.19	0.18
X''d Dir. Axis Subtransient	0.14	0.13	0.12	0.11	0.15	0.14	0.13	0.12
Xq Quad. Axis Reactance	2.57	2.39	2.22	1.92	2.92	2.84	2.62	2.49
X''q Quad. Axis Subtransient	0.36	0.33	0.31	0.27	0.41	0.40	0.37	0.35
XL Stator Leakage Reactance	0.07	0.06	0.06	0.05	0.08	0.08	0.08	0.07
X2 Negative Sequence Reactance	0.24	0.23	0.21	0.18	0.28	0.27	0.25	0.24
X0 Zero Sequence Reactance	0.10	0.09	0.09	0.07	0.10	0.09	0.09	0.08
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.61	3.35	3.11	2.69	4.17	4.05	3.75	3.56
X'd Dir. Axis Transient	0.23	0.21	0.20	0.17	0.24	0.23	0.21	0.20
X''d Dir. Axis Subtransient	0.17	0.16	0.15	0.13	0.17	0.17	0.15	0.15
Xq Quad. Axis Reactance	2.65	2.46	2.29	1.98	3.00	2.92	2.70	2.57
X''q Quad. Axis Subtransient	0.43	0.40	0.37	0.32	0.49	0.48	0.44	0.42
XL Stator Leakage Reactance	0.08	0.07	0.07	0.06	0.10	0.09	0.09	0.08
Xlr Rotor Leakage Reactance	0.12	0.11	0.10	0.09	0.13	0.13	0.12	0.11
X2 Negative Sequence Reactance	0.29	0.27	0.25	0.22	0.33	0.32	0.30	0.29
X0 Zero Sequence Reactance	0.12	0.11	0.10	0.09	0.11	0.11	0.10	0.10

# STAMFORD

## S4LID-E41 Wdg.311

<b>Time Constants (Seconds)</b>		
T'd TRANSIENT TIME CONST.	0.08	
T''d SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T''q SUB-TRANSTIME CONST.	0.0079	
<b>Resistances in Ohms (<math>\Omega</math>) at 22°C</b>		
Stator Winding Resistance (Ra), per phase for series connected	0.009	
Rotor Winding Resistance (Rf)	1.19	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.01125	
Negative Sequence Resistance (R2)	0.01296	
Zero Sequence Resistance (R0)	0.01125	
<b>Saturation Factors</b>	<b>400V</b>	<b>480V</b>
SG1.0	0.32	0.33
SG1.2	1.3	1.32
<b>Mechanical Data</b>		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0.5, 1	N/A
Moment of Inertia	4.6331kgm <sup>2</sup>	N/A
Weight Wound Stator	470kg	N/A
Weight Wound Rotor	400kg	N/A
Weight Complete Alternator	1024kg	N/A
Shipping weight in a Crate	1095kg	N/A
Packing Crate Size	155 x 87 x 107 (cm)	N/A
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	N/A
Bearing Non-Drive End	Ball 6314	N/A









# STAMFORD®

## S4LID-E41 Wdg.311

### THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

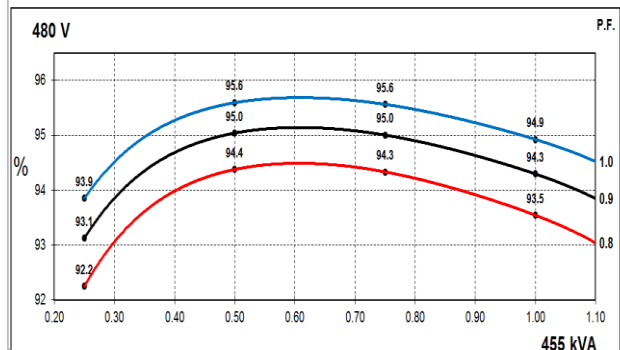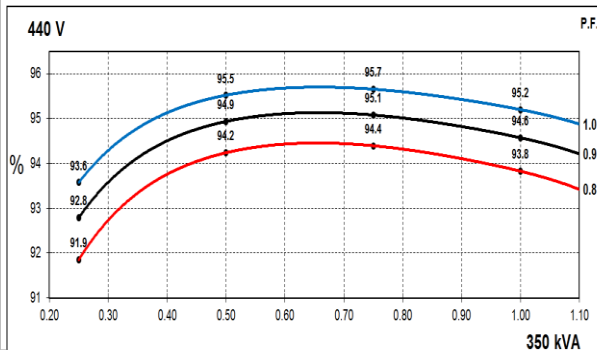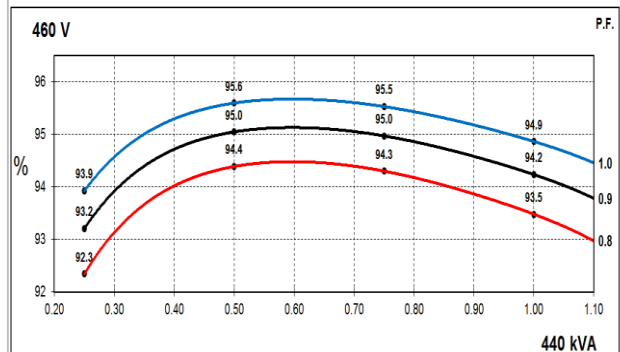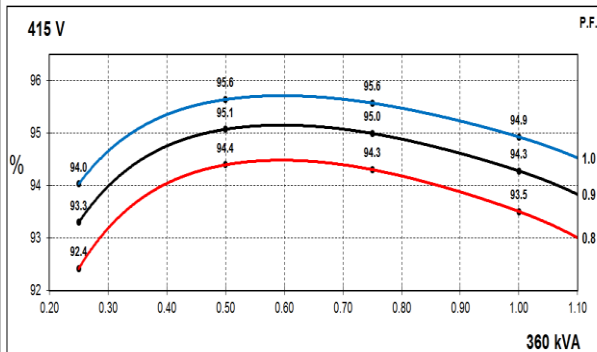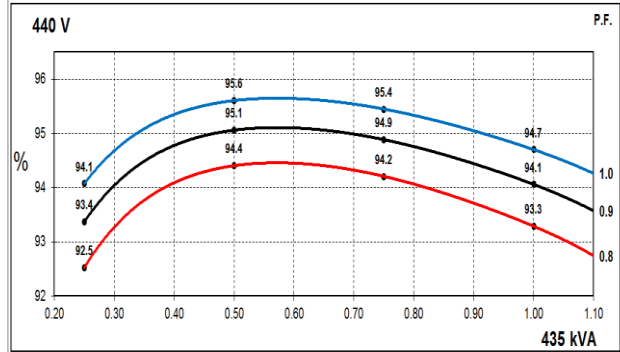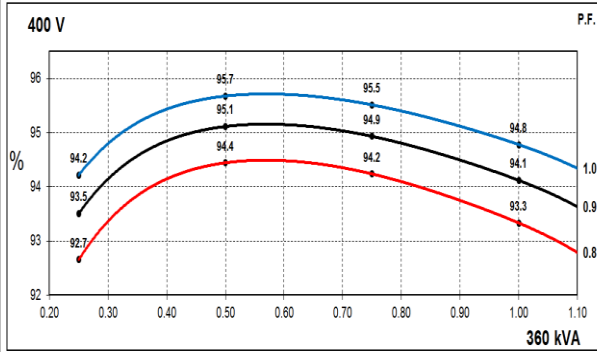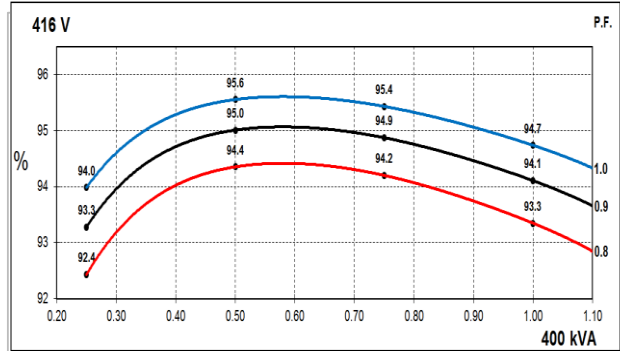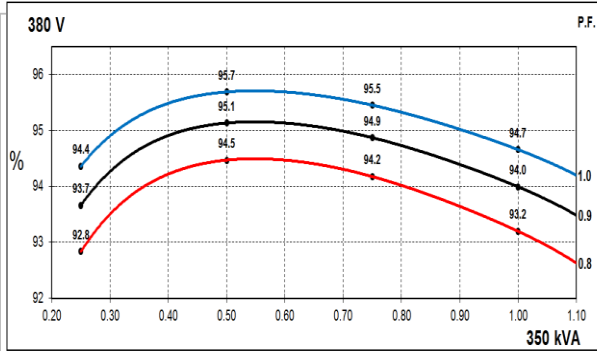


# STAMFORD


S4LID-E41 Wdg.311

## Locked Rotor Motor Starting Curves - Separately Excited

**50Hz**

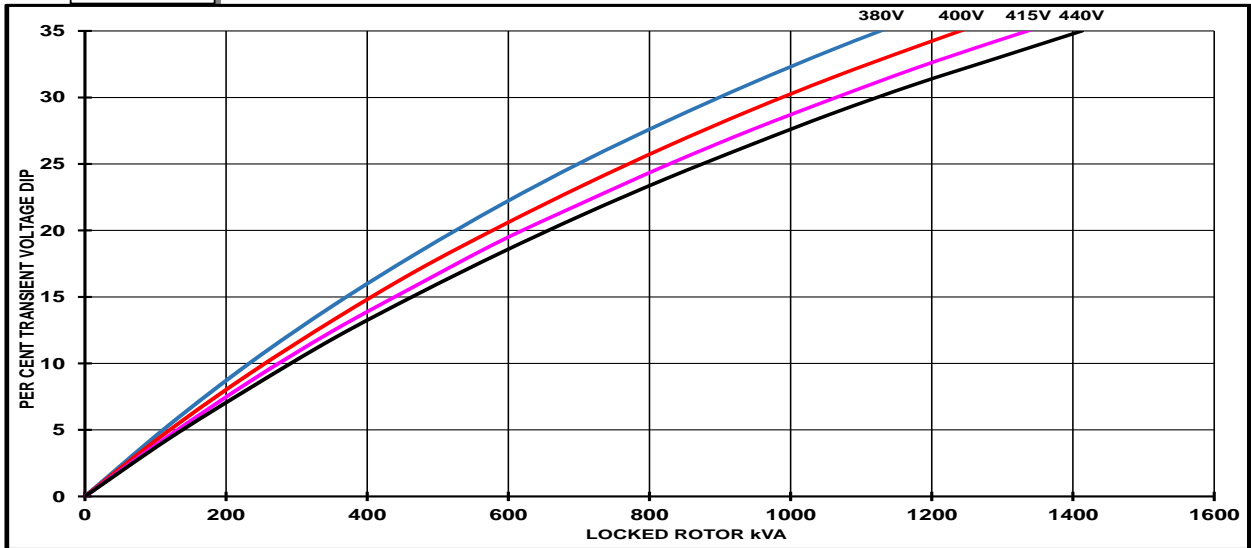

**60Hz**

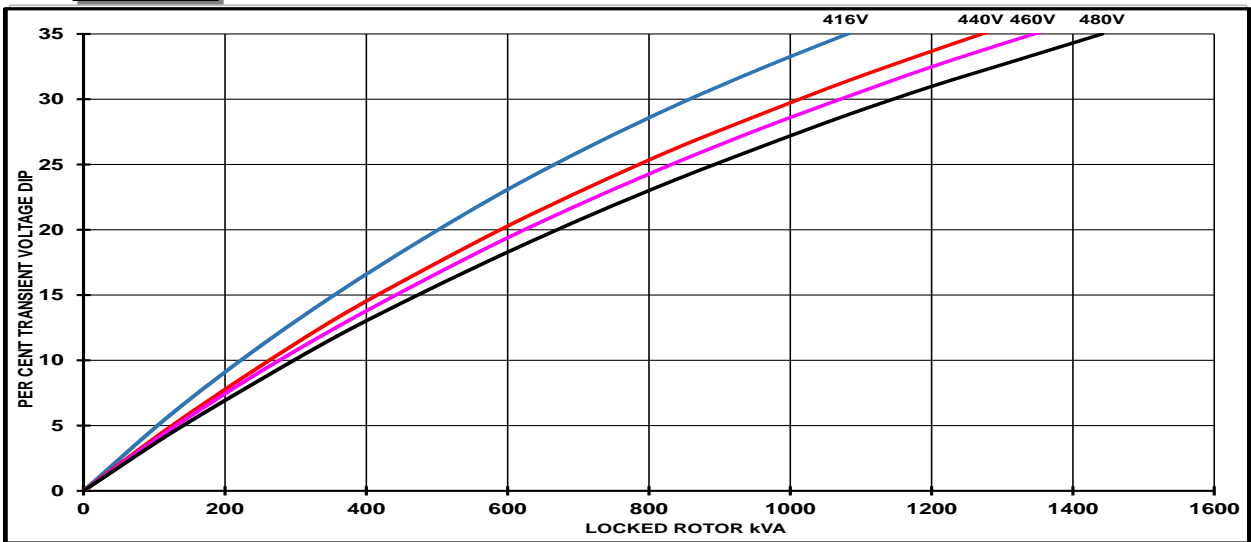


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

# STAMFORD


S4LID-E41 Wdg.311

## Locked Rotor Motor Starting Curves - Self Excited

**50Hz**

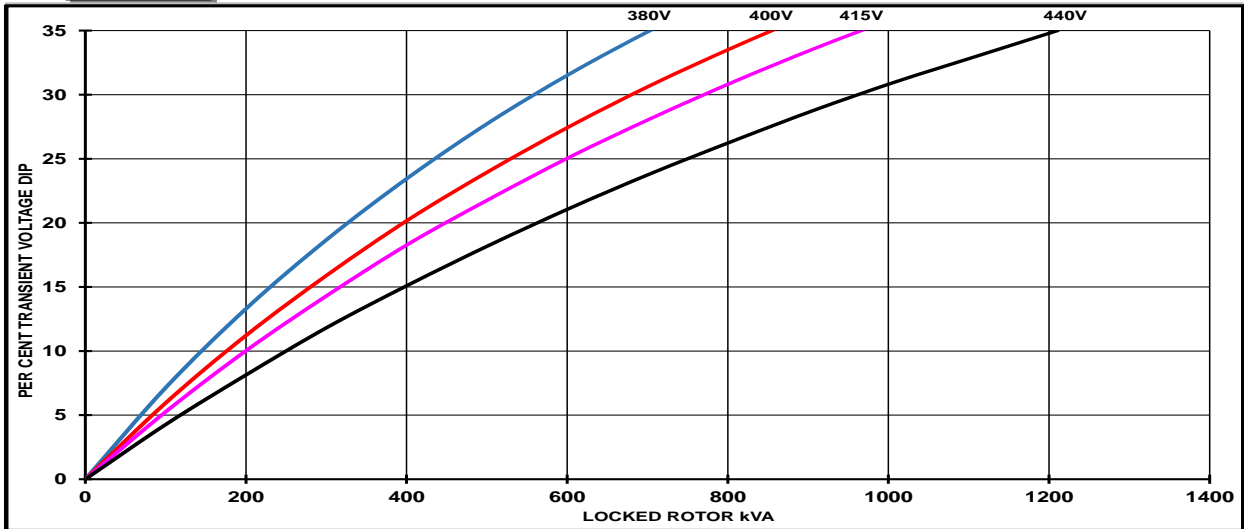

**60Hz**

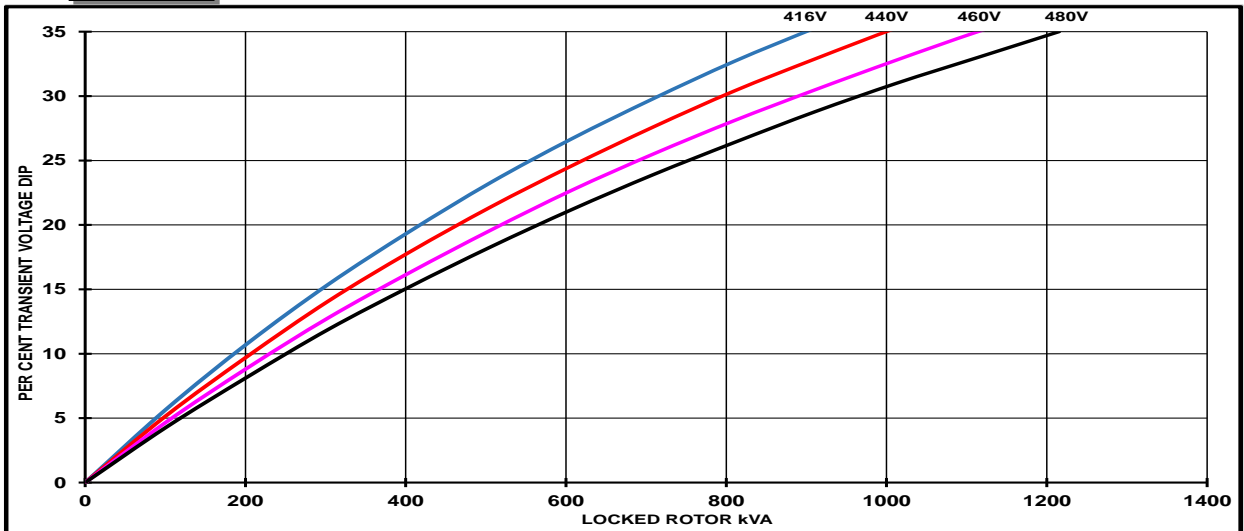

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	




# STAMFORD<sup>®</sup>

## S4LID-E41 Wdg.311


### Three-phase Short Circuit Decrement Curve

**50Hz**

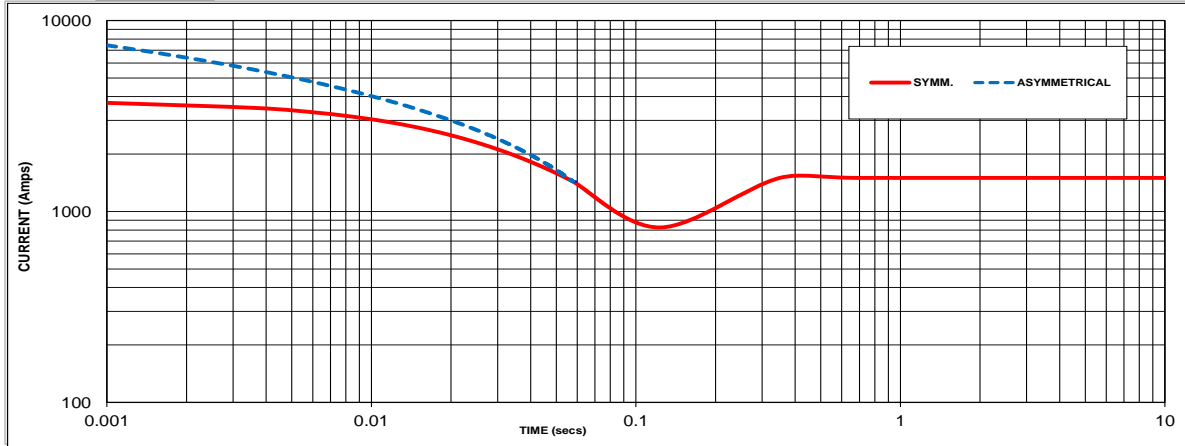

Sustained Short Circuit = 1500 Amps

**60Hz**

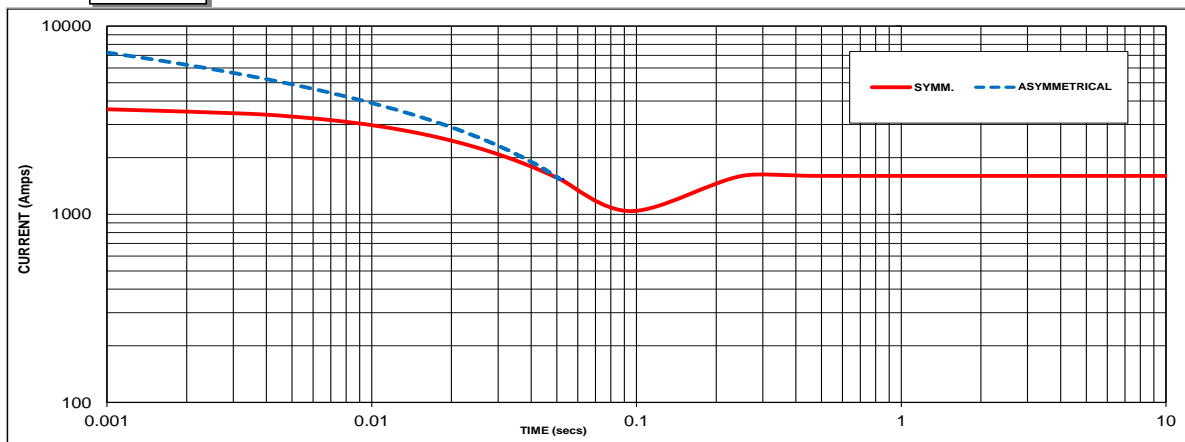

Sustained Short Circuit = 1600 Amps

**Note 1**

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level

**Note 2**

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

**Note 3**


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :  
 Parallel Star = Curve current value X 2  
 Series Delta = Curve current value X 1.732

# STAMFORD


S4LID-E41 Wdg.311

## Typical Alternator Operating Charts

**400V/50Hz**

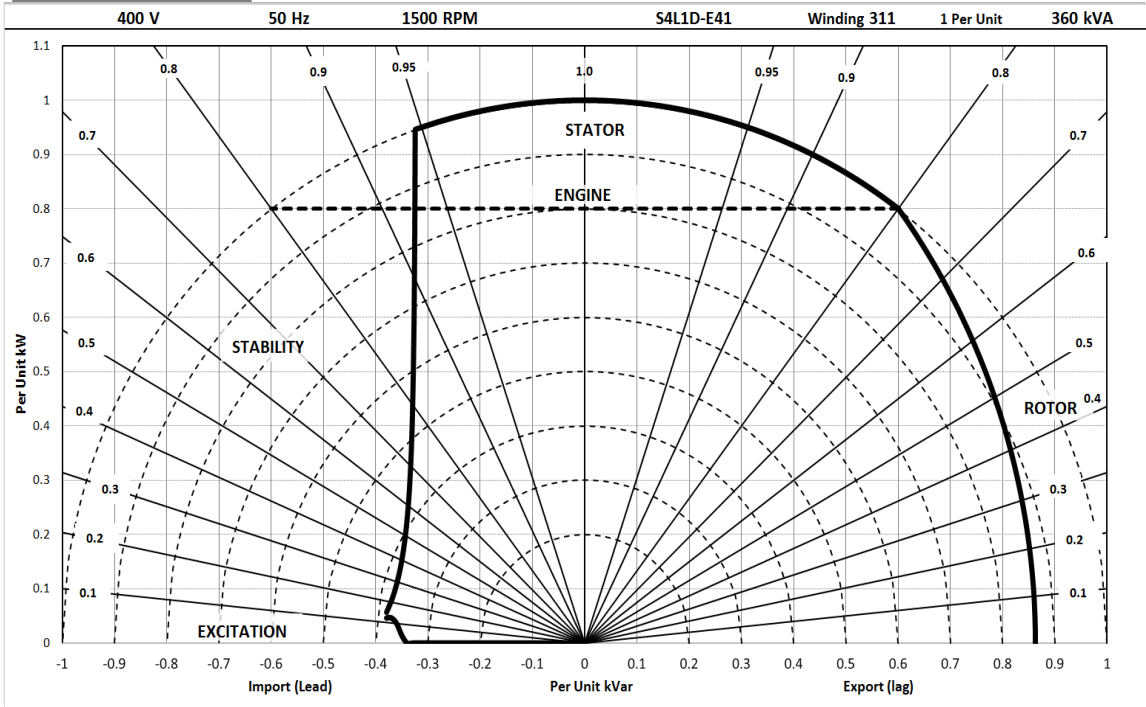

**480V/60Hz**

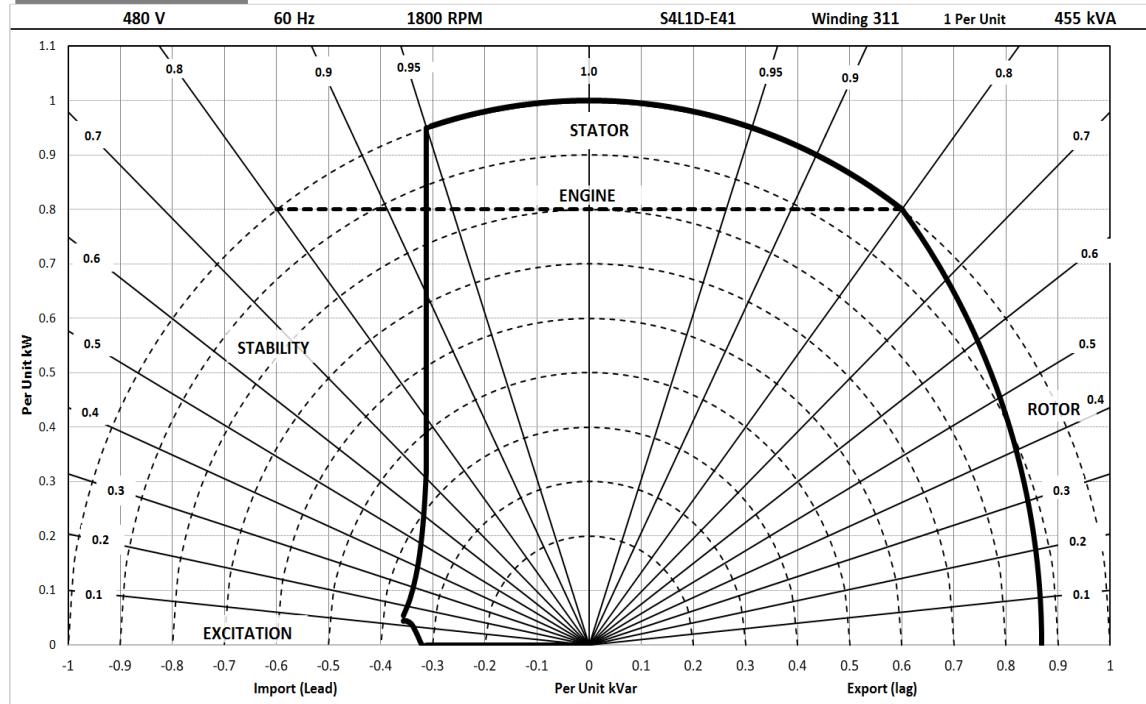

# STAMFORD®

## S4LID-E41 Wdg.311

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
<b>50 Hz</b>	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	380	415	400	380	370	385	385	370	350	360	360	350	320	325	325	320
	kW	304	332	320	304	296	308	308	296	280	288	288	280	256	260	260	256
	Efficiency (%)	92.7	92.5	93.0	93.5	92.9	93.0	93.2	93.6	93.2	93.3	93.5	93.8	93.6	93.8	93.9	94.1
	kW Input	328	359	344	325	319	331	331	316	300	309	308	298	274	277	277	272

<b>60 Hz</b>	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	435	470	475	490	420	460	460	475	400	435	440	455	365	395	400	410
	kW	348	376	380	392	336	368	368	380	320	348	352	364	292	316	320	328
	Efficiency (%)	92.9	92.9	93.1	93.2	93.1	93.0	93.3	93.3	93.4	93.3	93.5	93.5	93.7	93.7	93.9	93.9
	kW Input	374	405	408	421	361	396	395	407	343	373	377	389	312	337	341	349

#### De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

[news.stamford-avk.com](https://news.stamford-avk.com)

**For Applications Support:**  
[applications@cummins.com](mailto:applications@cummins.com)

**For Customer Service:**  
[service-engineers@stamford-avk.com](mailto:service-engineers@stamford-avk.com)

**For General Enquiries:**  
[info@cumminsgeneratortechnologies.com](mailto:info@cumminsgeneratortechnologies.com)

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



## S4L1S-E4 Wdg.17 - Technical Data Sheet

### Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

### Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



### Excitation and Voltage Regulators

Excitation System					
AVR Type	AS440	MX341	MX321		
Voltage Regulation	± 1%	± 1%	± 0.5%		with 4% Engine Governing
AVR Power	Self-Excited	PMG	PMG		

No Load Excitation Voltage (V)	12 - 9
No Load Excitation Current (A)	0.7 - 0.5
Full Load Excitation Voltage (V)	41 - 39
Full Load Excitation Current (A)	2.3 - 2.2
Exciter Time Constant (seconds)	0.105



# STAMFORD

## S4L1S-E4 Wdg.17

Electrical Data	
Insulation System	Class H
Stator Winding	Double Layer Lap
Winding Pitch	Two Thirds
Winding Leads	12
Winding Number	17
Number of Poles	4
IP Rating	IP23
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%
Short Circuit Ratio	1/Xd
Steady State X/R Ratio	16.664
<b>60 Hz</b>	
Telephone Interference	TIF<50
Cooling Air	0.99 m <sup>3</sup> /sec
Voltage Star	600
kVA Base Rating (Class H) for Reactance Values	440
Saturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	2.67
X'd Dir. Axis Transient	0.18
X''d Dir. Axis Subtransient	0.13
Xq Quad. Axis Reactance	2.24
X''q Quad. Axis Subtransient	0.31
XL Stator Leakage Reactance	0.06
X2 Negative Sequence Reactance	0.21
X0 Zero Sequence Reactance	0.07
Unsaturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	3.20
X'd Dir. Axis Transient	0.21
X''d Dir. Axis Subtransient	0.15
Xq Quad. Axis Reactance	2.31
X''q Quad. Axis Subtransient	0.37
XL Stator Leakage Reactance	0.07
Xlr Rotor Leakage Reactance	0.10
X2 Negative Sequence Reactance	0.25
X0 Zero Sequence Reactance	0.08

# STAMFORD

## S4L1S-E4 Wdg.17


Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.08	
T'd SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T'q SUB-TRANSTIME CONST.	0.0304	
Resistances in Ohms ( $\Omega$ ) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.015	
Rotor Winding Resistance (Rf)	1.19	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.01875	
Negative Sequence Resistance (R2)	0.0216	
Zero Sequence Resistance (R0)	0.01875	
Saturation Factors		
	600V	
SG1.0	0.33	
SG1.2	1.62	
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0, 0.5, 1, 2, 3	SAE 0, 0.5, 1, 2
Moment of Inertia	4.6331 kgm <sup>2</sup>	4.4343 kgm <sup>2</sup>
Weight Wound Stator	470 kg	470 kg
Weight Wound Rotor	400 kg	377 kg
Weight Complete Alternator	1024 kg	1030 kg
Shipping weight in a Crate	1095 kg	1100 kg
Packing Crate Size	155 x 87 x 107 (cm)	155 x 87 x 107 (cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	Ball 6317
Bearing Non-Drive End	Ball 6314	Ball 6314

# STAMFORD®

S4L1S-E4 Wdg.17

## THREE PHASE EFFICIENCY CURVES

60Hz

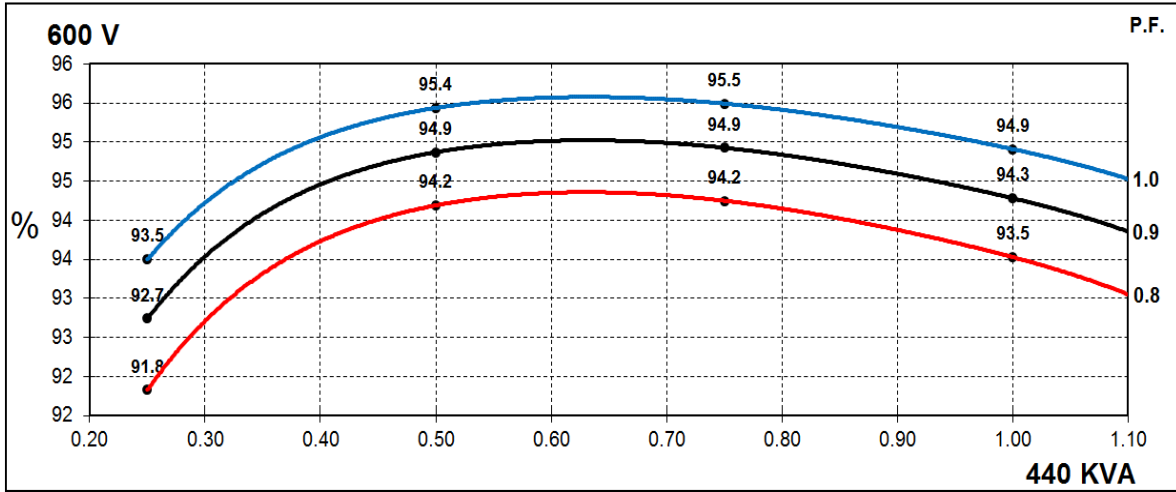


# STAMFORD®


S4L1S-E4 Wdg.17

## Locked Rotor Motor Starting Curves - Separately Excited

60Hz

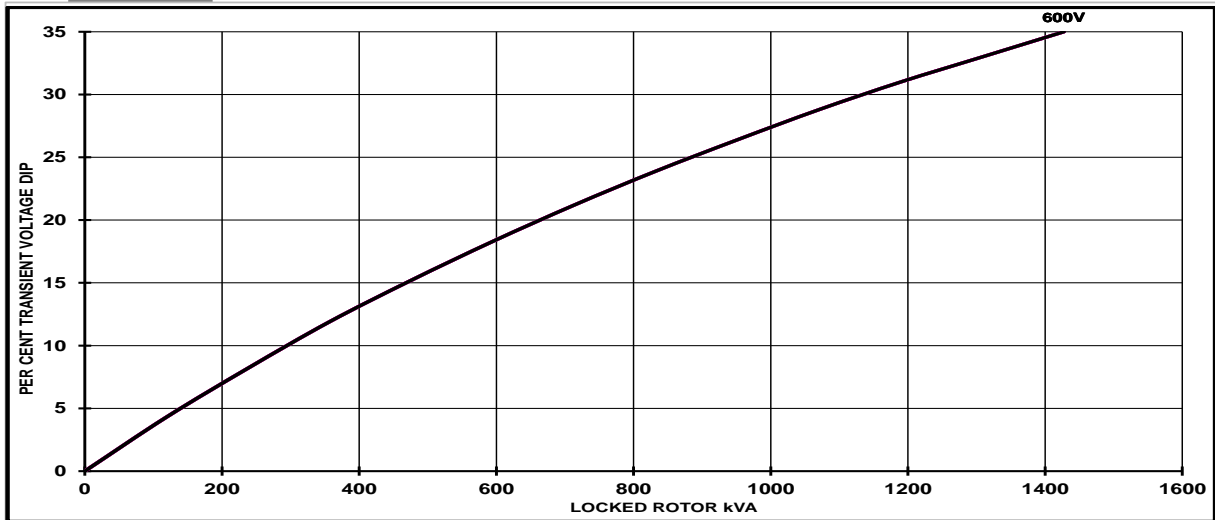

## Locked Rotor Motor Starting Curves - Self Excited

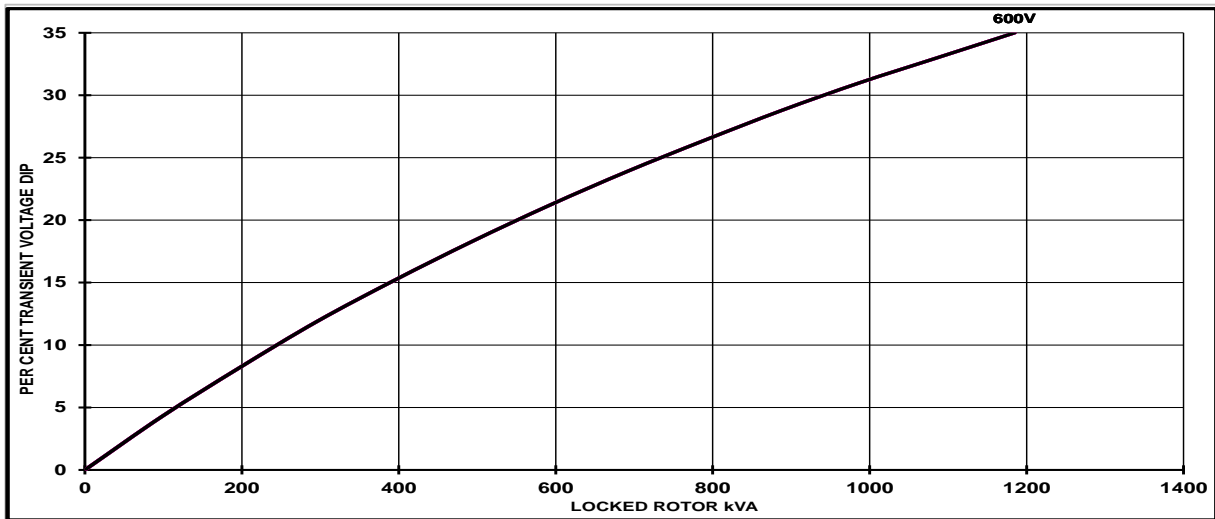


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

# STAMFORD<sup>®</sup>

## S4L1S-E4 Wdg.17

### Three-phase Short Circuit Decrement Curve

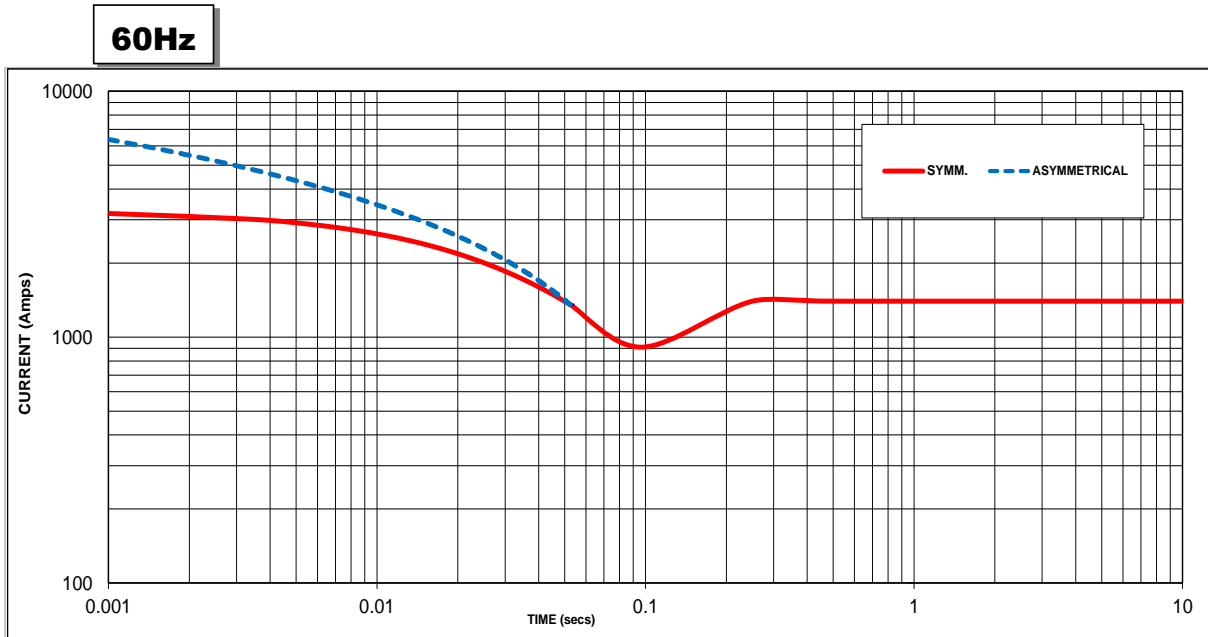

Sustained Short Circuit = 1400 Amps

#### Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

Voltage	Factor
600V	X 1.00

The sustained current value is constant irrespective of voltage level

#### Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

#### Note 3


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :  
 Parallel Star = Curve current value X 2  
 Series Delta = Curve current value X 1.732



# STAMFORD

S4L1S-E4 Wdg.17

## Typical Alternator Operating Charts

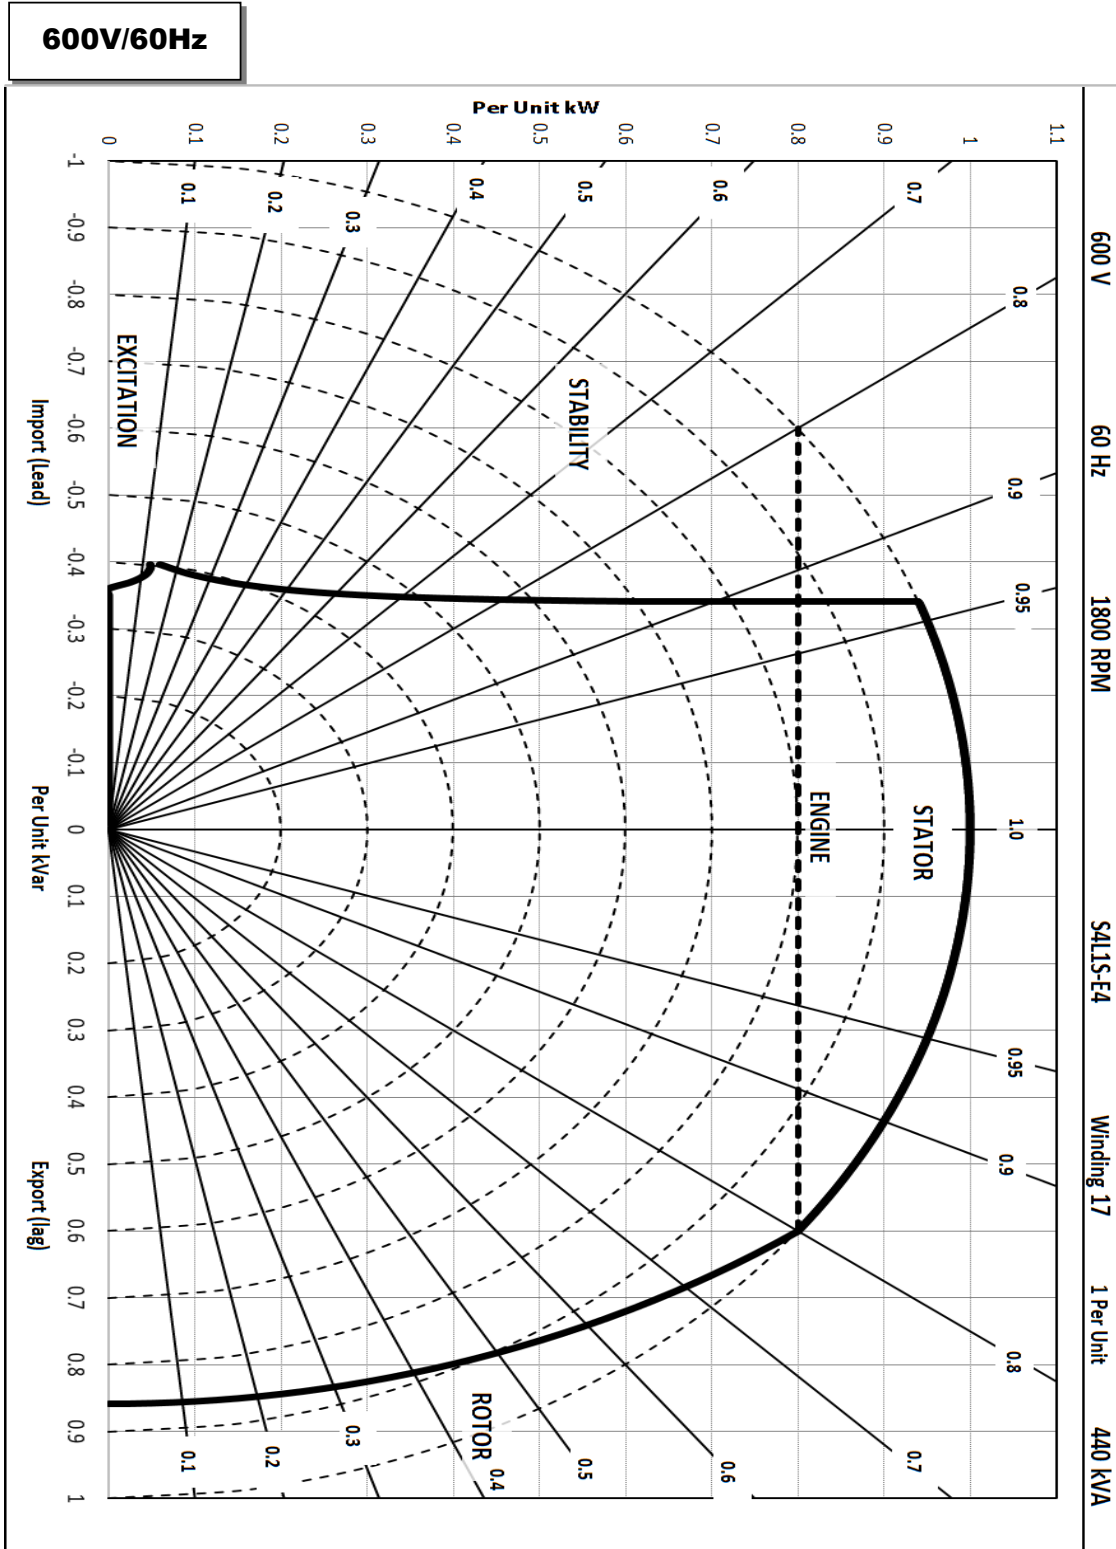

# STAMFORD®

## S4L1S-E4 Wdg.17

### RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C	Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C
<b>60</b> Hz	Series Star (V)	600	600	600	600
	kVA	475	460	440	400
	kW	380	368	352	320
	Efficiency (%)	93.2	93.3	93.5	93.9
	kW Input	408	394	376	341

#### De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

#### Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

**Note:** Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at [youtube.com/stamfordavk](https://youtube.com/stamfordavk)

**[news.stamford-avk.com](https://news.stamford-avk.com)**

**For Applications Support:**  
**[applications@cummins.com](mailto:applications@cummins.com)**

**For Customer Service:**  
**[service-engineers@stamford-avk.com](mailto:service-engineers@stamford-avk.com)**

**For General Enquiries:**  
**[info@cumminsgeneratortechnologies.com](mailto:info@cumminsgeneratortechnologies.com)**

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.  
Cummins and the Cummins logo are registered trade marks of Cummins Inc.  
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



# DSE7410/20

## AUTO START & AUTO MAINS FAILURE MODULES

### FEATURES

The DSE7410 is an Auto Start Control Module and the **DSE7420** is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

A sophisticated module monitoring an extensive number of engine parameters, the DSE74xx will announce warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LED, remote PC, audible alarm and via SMS text alerts. The module includes RS232, RS485 & Ethernet ports as well as dedicated terminals for system expansion.

The DSE7400 Series modules are compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer a comprehensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry paralleling requirements.

The modules can be easily configured using the DSE Configuration Suite Software. Selected front panel editing is also available.

### ENVIRONMENTAL TESTING STANDARDS

#### ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2  
EMC Generic Immunity Standard for the Industrial Environment  
BS EN 61000-6-4  
EMC Generic Emission Standard for the Industrial Environment

#### ELECTRICAL SAFETY

BS EN 60950  
Safety of Information Technology Equipment, including Electrical Business Equipment

#### TEMPERATURE

BS EN 60068-2-1  
Ab/Ae Cold Test -30 °C  
BS EN 60068-2-2  
Bb/Be Dry Heat +70 °C

#### VIBRATION

BS EN 60068-2-6  
Ten sweeps in each of three major axes  
5 Hz to 8 Hz @ +/-7.5 mm,  
8 Hz to 500 Hz @ 2 gn

#### HUMIDITY

BS EN 60068-2-30  
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours  
BS EN 60068-2-78  
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


#### SHOCK

BS EN 60068-2-27  
Three shocks in each of three major axes  
15 gn in 11 ms

#### DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529  
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

## COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

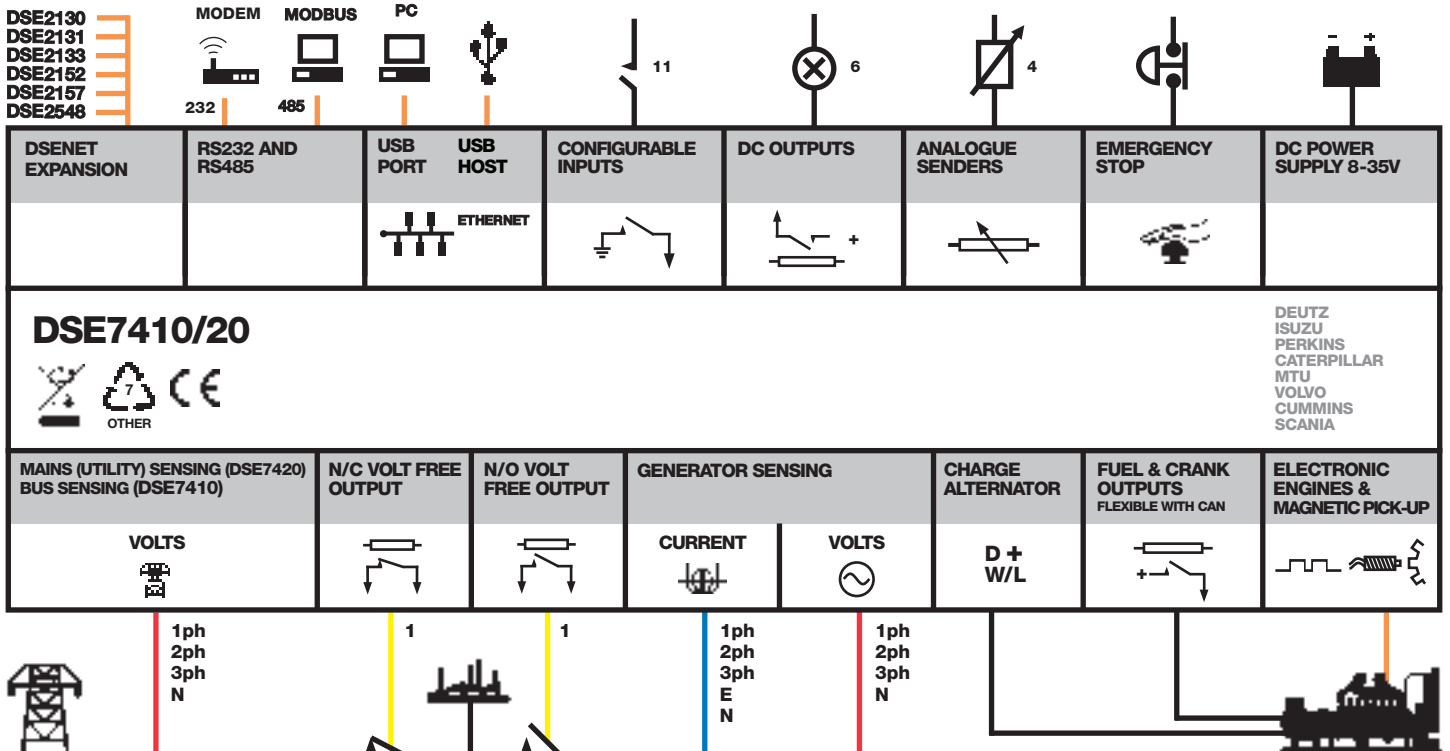

# DSE7410/20

## AUTO START & AUTO MAINS FAILURE MODULES

### FEATURES



### DSE7420

### DSE7410



### KEY FEATURES

- Configurable inputs (11)
- Configurable outputs (8)
- Voltage measurement
- Mains (utility) failure detection
- Dedicated load test button
- kW overload alarms
- Comprehensive electrical protection
- RS232, RS485 & Ethernet remote communications
- Modbus RTU/TCP
- PLC functionality
- Multi event exercise timer
- Back-lit LCD 4-line text display
- Multiple display languages
- Automatic start/Manual start
- Audible alarm
- Fixed and flexible LED indicators
- Event log (250)
- Engine protection
- Fault condition notification to a designated PC
- Front panel mounting
- Protected front panel programming
- Configurable alarms and timers
- Configurable start and stop timers

- Five key menu navigation
- Front panel editing with PIN protection
- 3 configurable maintenance alarms
- CAN and magnetic pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- "Protections disabled" feature
- Reverse power protection
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7420)
- Unbalanced load protection
- Independent earth fault trip
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software

- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- DSENet® expansion
- Integral PLC editor

### KEY BENEFITS

- RS232, RS485 & Ethernet can be used at the same time
- DSENet® connection for system expansion
- PLC functionality
- Five step dummy load support
- Five step load shedding support
- High number of inputs and outputs
- Worldwide language support
- Direct USB connection to PC
- Ethernet monitoring
- USB host
- Data logging & trending

### RELATED MATERIALS

#### TITLE

DSE7410 Installation Instructions  
**DSE7420** Installation Instructions  
 DSE74xx Quick Start Guide  
 DSE74xx Operator Manual  
 DSE74xx PC Configuration Suite Manual

#### PART NO'S

053-085  
 053-088  
 057-162  
 057-161  
 057-160

### SPECIFICATION

#### DC SUPPLY

**CONTINUOUS VOLTAGE RATING**  
 8 V to 35 V Continuous

#### CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

#### MAXIMUM OPERATING CURRENT

260 mA at 12 V, 130 mA at 24 V

#### MAXIMUM STANDBY CURRENT

120 mA at 12 V, 65 mA at 24 V

#### CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

#### OUTPUTS

##### OUTPUT A (FUEL)

15 A DC at supply voltage

##### OUTPUT B (START)

15 A DC at supply voltage

##### OUTPUTS C & D

8 A AC at 250 V AC (Volt free)

##### AUXILIARY OUTPUTS E,F,G,H,I & J

2 A DC at supply voltage

#### GENERATOR

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### MAINS (UTILITY) (DSE7420)

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### BUS (DSE7410)

##### VOLTAGE RANGE

15 V to 333 V AC (L-N)

##### FREQUENCY RANGE

3.5 Hz to 75 Hz

#### MAGNETIC PICK UP

##### VOLTAGE RANGE

+/- 0.5 V to 70 V

##### FREQUENCY RANGE

10,000 Hz (max)

#### DIMENSIONS

##### OVERALL

240 mm x 172 mm x 57 mm  
 9.4" x 6.8" x 2.2"

##### PANEL CUTOUT

220 mm x 160 mm  
 8.7" x 6.3"

##### MAXIMUM PANEL THICKNESS

8 mm  
 0.3"

##### STORAGE TEMPERATURE RANGE

-40 °C to +85 °C

### DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH  
**TELEPHONE** +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303  
**EMAIL** sales@deepseapl.com **WEBSITE** www.deepseapl.com

### DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA  
**TELEPHONE** +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708  
**EMAIL** sales@deepseausa.com **WEBSITE** www.deepseausa.com



# Tmax-Molded Case Circuit Breakers

T5 400A and 600A Frame

AC Circuit Breakers and Switches

DC Circuit Breakers and Switches (400A Only)

3 and 4 Pole

Motor Circuit Protectors

Higher Performances in Less Space

Field Installable Accessories and Trip Units



**Dimensions** 3P Fixed Version 8.07H x 5.51W x 4.07D

## Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

- "Low Voltage Directives" (LVD) no. 73/23 EEC

- "Electromagnetic Compatibility Directive" (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

## Interrupting ratings (RMS sym. kAmps)

T5

Continuous Current Rating

400-600A

Number of Poles

3-4

		N	S	H	L	V
AC						
240V		65	100	150	200	200
480V		25	35	65	100	150
600V		18	25	35	65	100
DC* ( 400 A only )						
500V	2 poles in series	25	35	50	65	100
600V	3 poles in series	16	25	35	50	65

\*Thermo Magnetic Trip Only



## Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

### Mounting

Fixed  
Plug-in  
Drawout

### Connections

Busbar connection or compression lugs  
Pressure-type terminals for bare cables  
Rear connections

### Trip Unit

TMA thermo magnetic trip units, with adjustable thermal threshold ( $I_1 = 0.7 \dots 1 \times I_n$ ) and adjustable magnetic threshold ( $I_3 = 5 \dots 10 \times I_n$ ).

PR221DS, PR222DS/P and PR222DS/PD-A electronic trip unit

<b>Weight (lbs)</b>	8.55
---------------------	------

## Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Front for lever operating mechanism - FLD
- Direct rotary handle - RHD
- Stored energy motor operator - MOE
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front terminal for copper cable - FC Cu
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Distribution lugs
- Rear orientated terminal - R
- Phase separators
- Residual current release (IEC Only)



### ABB Inc.

1206 Hatton Road  
Wichita Falls, TX 76302  
For more information and  
the location of your local  
field office please go to  
[www.abb-control.com](http://www.abb-control.com)

# Tmax-Molded Case Circuit Breakers

T6 800A Frame

**AC Circuit Breakers and Switches**

**DC Circuit Breakers and Switches**

**3 and 4 Pole**

**Motor Circuit Protectors**

**Higher Performances in Less Space**

**Field Installable Accessories and Trip Units**



**Dimensions** 3P Fixed Version 10.55H x 8.26W x 4.07D

**Weight** 20.9 (lbs)

## Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

– “Low Voltage Directives” (LVD) no. 73/23 EEC

– “Electromagnetic Compatibility Directive” (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

## Interrupting ratings (RMS sym. kAmps)

		T6			
Continuous Current Rating		800			
Number of Poles		3-4			
		N	S	H	L
AC					
240V		65	100	200	200
480V		35	50	65	100
600V		20	25	35	42
DC*					
500V	2 poles in series	35	35	50	65
600V	3 poles in series	20	20	35	50

\*Thermal Magnetic Trip Only



## Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

### Mounting

Fixed  
Drawout

### Connections

Busbar connection or compression lugs  
Pressure-type terminals for bare cables  
Rear connections

### Trip Unit

TMA thermal magnetic trip units, with adjustable thermal threshold ( $I_1 = 0.7 \dots 1 \times I_n$ ) and adjustable magnetic threshold ( $I_3 = 5 \dots 10 \times I_n$ ).

PR221DS, PR222DS/P, and PR222DS/PD-A electronic trip unit

## Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Front for lever operating mechanism - FLD
- Direct rotary handle - RHD
- Stored energy motor operator - MOE
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Rear orientated terminal - R
- Phase separators
- Residual current relay (IEC Only)



### ABB Inc.

1206 Hatton Road  
Wichita Falls, TX 76302  
For more information and  
the location of your local  
field office please go to  
[www.abb-control.com](http://www.abb-control.com)

# Tmax-Molded Case Circuit Breakers

T7 1200A Frame

## AC Circuit Breakers and Switches

3 and 4 Pole

Motor Circuit Protectors

Higher Performances in Less Space

Field Installable Accessories and Trip Units



**Dimensions** 3P Fixed Version 10.55H x 8.26W x 6.06D

**Weight** 21.4 (lbs)

## Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

– “Low Voltage Directives” (LVD) no. 73/23 EEC

– “Electromagnetic Compatibility Directive” (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

## Interrupting ratings (RMS sym. kAmps)

	T7		
Continuous Current Rating	1200		
Number of Poles	3-4		
	S	H	L
AC			
240V	65	100	150
480V	50	65	100
600V	25	50	65

The ABB logo, consisting of the letters 'ABB' in a bold, red, sans-serif font.

## Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

### Mounting

Fixed  
Drawout

### Connections

Busbar connection or compression lugs  
Pressure-type terminals for bare cables  
Rear connections

### Trip Unit

PR231/P, PR232/P, PR331DS, and PR332DS/P electronic trip unit

## Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Padlock provision - PLL
- Direct rotary handle - RHD
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Rear orientated terminal - R
- Phase separators
- Residual current relay (IEC Only)



### ABB Inc.

1206 Hatton Road  
Wichita Falls, TX 76302  
For more information and  
the location of your local  
field office please go to  
[www.abb-control.com](http://www.abb-control.com)



# Digital Linear Chargers

## Specifications

- Waterproof, shock-and vibration-resistant aluminum construction
- Saltwater tested and fully corrosion-resistant
- Short circuit, reverse polarity, and ignition protected
- For use with 12V/6 cell batteries that are flooded/wet cell, maintenance free or starved electrolyte (AGM) only
- FCC compliant
- UL listed to marine standard 1236
- 3 year warranty
- Replaces all existing current on-board chargers (excluding portables)
- No Price Increase
- Availability: November 2010



### DIGITAL LINEAR ON-BOARD CHARGERS

PRODUCT CODE	PRODUCT DESCRIPTION
1821065	MK 106D (1 bank x 6 amps)
1821105	MK-110D (1 bank x 10 amps)
1822105	MK-210D (2 bank x 5 amps)
1823155	MK-315D (3 bank x 5 amps)
1822205	MK-220D (2 bank x 10 amps)
1823305	MK-330D (3 bank x 10 amps)
1824405	MK-440D (4 bank x 10 amps)
1822305	MK-230D (2 bank x 15 amps)
1823455	MK-345D (3 bank x 15 amps)
1824605	MK-460D (4 bank x 15 amps)



# Digital Linear Chargers

## Specifications (cont.)

- New 4-color package design

minnkotamotors.com

**MINN-KOTA**

**ON-BOARD MARINE BATTERY CHARGER**

DIGITALLY CONTROLLED 2X FASTER CHARGING PROTECTS BATTERIES

**Digital CONTROL**

**MK210D**

<b>MK 210D</b>
2 CHARGING BANKS
5 AMPS PER BANK
10 AMPS TOTAL OUTPUT

UL LISTED FC 10AMPS

## CHARGING TECHNOLOGY

### CHARGING TECHNOLOGY

**DIGITALLY CONTROLLED.**  
Microprocessor design protects your batteries so you can stay on the water longer. It monitors temperature and state of charge to create a faster, regulated, more precise charge. Also includes automatic shut-off when charging is complete to extend battery life.

**DIGITALLY CONTROLLED.**  
Microprocessor design protects your batteries so you can stay on the water longer. It monitors temperature and state of charge to create a faster, regulated, more precise charge. Also includes automatic shut-off when charging is complete to extend battery life.

**ENHANCED STATUS CODES.**  
Provides comprehensive feedback on charge stage, maintenance mode status, error notification and full charge.

**ENHANCED STATUS CODES.**  
Provides comprehensive feedback on charge stage, maintenance mode status, error notification and full charge.

**Digital CONTROL**

**MULTI-STAGE CHARGING**

AMPS & VOLTS

TIME (THREE STAGE CHARGER)

BULK ABSORPTION MAINTENANCE

— VOLTS  
— AMPS

**BATTERY CHARGER TEMPERATURE COMPENSATION**

BATTERY VOLTAGE

absorption voltage (output voltage)

BATTERY TEMPERATURE (degrees F)

**MULTI-STAGE CHARGING.**  
Delivers a fast, precise charge profile by automatically controlling current and voltage without overcharging your batteries.




**MULTI-STAGE CHARGING.**  
Delivers a fast, precise charge profile by automatically controlling current and voltage without overcharging your batteries.



**AUTOMATIC TEMPERATURE COMPENSATION.**  
Adjusts output voltage based on ambient temperature to ensure a full charge and protect your batteries.

**AUTOMATIC TEMPERATURE COMPENSATION.**  
Adjusts output voltage based on ambient temperature to ensure a full charge and protect your batteries.

2010



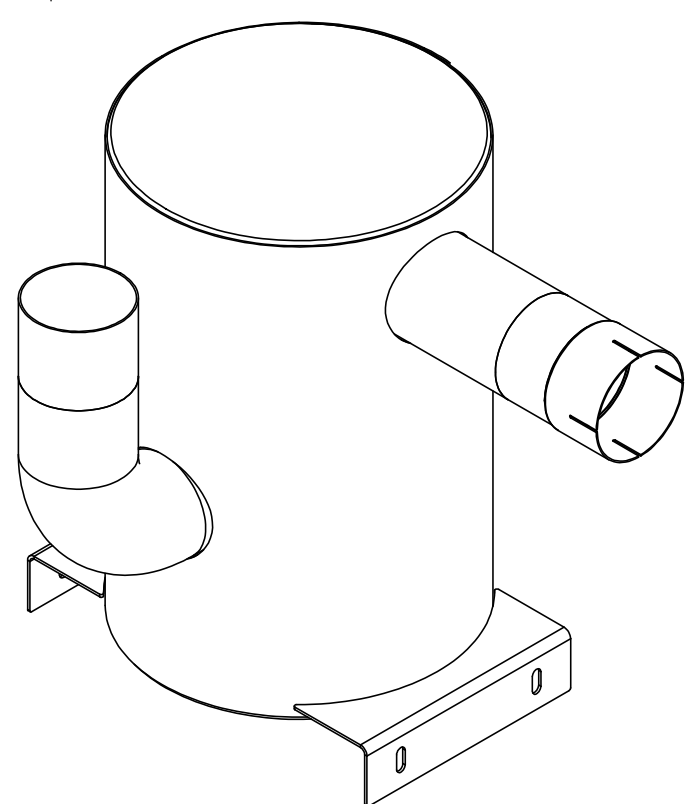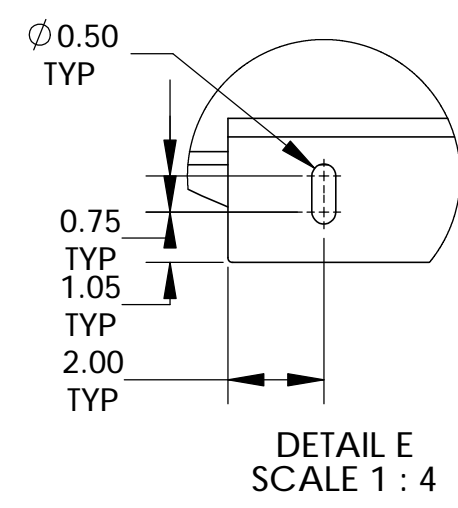
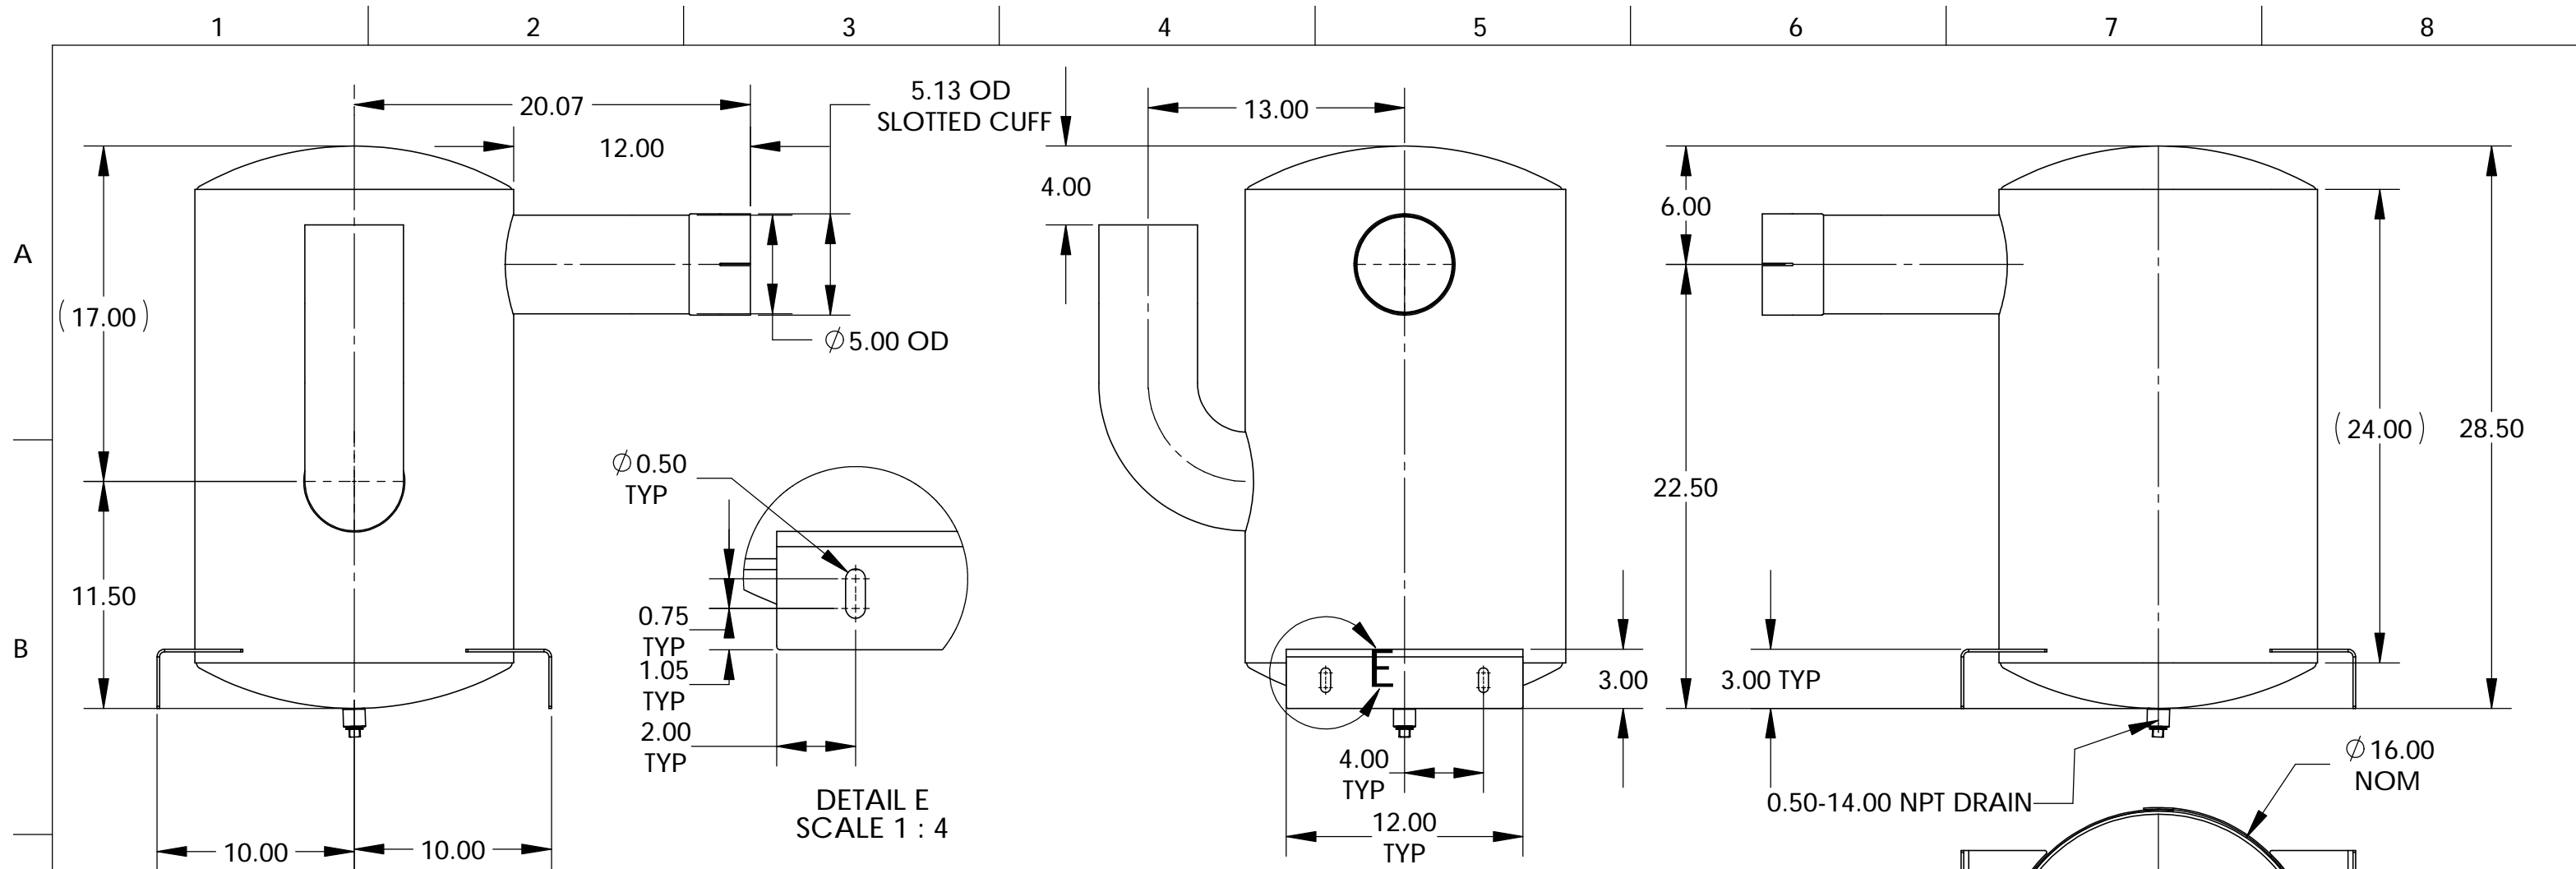


ENGINE INFORMATION	SILENCER INFORMATION	DRAWN BY	DATE	
ENGINE MAKE MTU	RESONATOR FREQUENCY ---	CB	08/23/2017	
ENGINE MODEL 6R1600	RESONATOR ALPHA ---	CHECKED BY CB	DATE 09/15/2017	DESCRIPTION SIL: COMP CRIT CS S-E 5.00-5.00 Ø16.00 28.50 OAL F:6.00 --- CONSTRUCTION MATERIAL CS
DISPLACEMENT 641	SILENCER Km ---	ENGINEERING CB	DATE 09/15/2017	
EXHAUST FLOW 2542	SILENCER IL ---	MANUFACTURING CB	WEIGHT (LBS) 78	FINISH HIGH TEMP BLACK PAINT PART NUMBER 500-008546 SCALE (DO NOT SCALE) SHEET SIZE 1:8 B
EXHAUST TEMPERATURE 806	TOLERANCES DO NOT APPLY TO GAGE THICKNESS OR COMMERCIAL FEATURES	TOLERANCES UNLESS OTHERWISE SPECIFIED X = ±0.25 ALL ANGLES .XX = ±0.125 ±1° .XXX = ±0.0625 .XXXX = ±0.03125	SHEET 3 OF 3	
CUSTOMER ---	CUSTOMER P7/N ---	MAX BACK PRESSURE 60.2	THIRD ANGLE PROJECTION 	This drawing and the information contained is confidential and the property of Bergari Solutions, LLC. None of this information is to be copied or shared in any form without the express permission from Bergari Solutions, LLC.
REV.	BY	DATE	DESCRIPTION	ECO
01	CB	09/15/2017	EXTENDED OVERALL LENGTH	---


CUSTOMER ---	CUSTOMER P7/N ---
-----------------	----------------------

# PR-3000 OPEN DIMENSIONAL OVERVIEW

## TOP VIEW

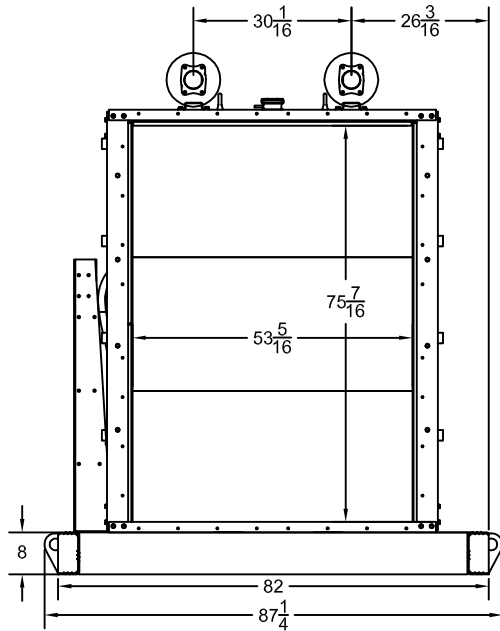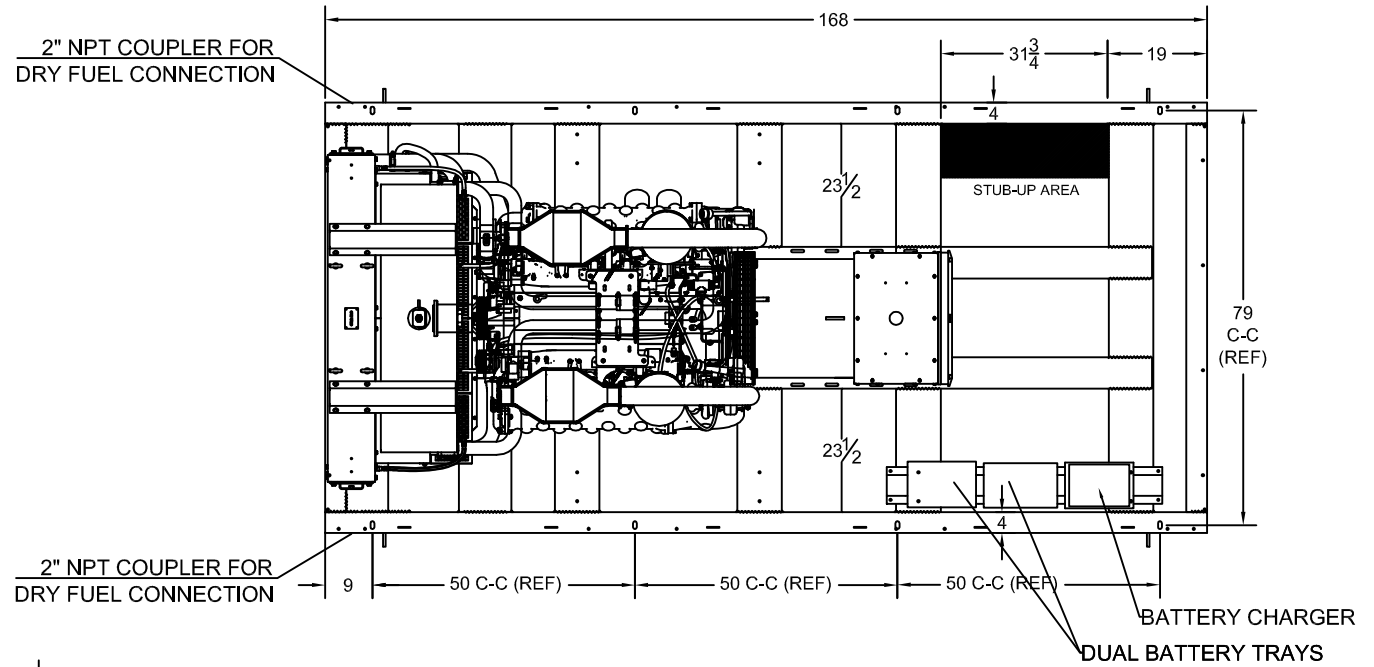

## RADIATOR VIEW

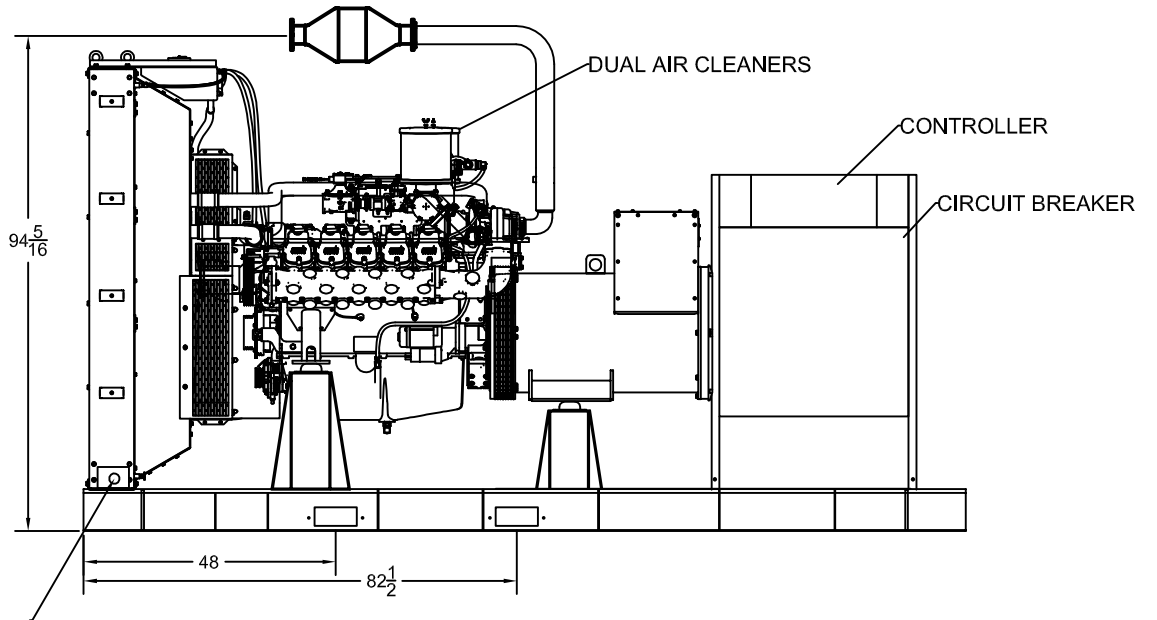


## SIDE VIEW



# LEVEL 2 ENCLOSURE OUTLINE DIMENSIONS FOR PR-3000 THRU PR-3500

**TOP VIEW**


(GEN-SET HAS (6) DOORS, (3) SHOWN OPEN ARE TYPICAL FOR BOTH SIDES)

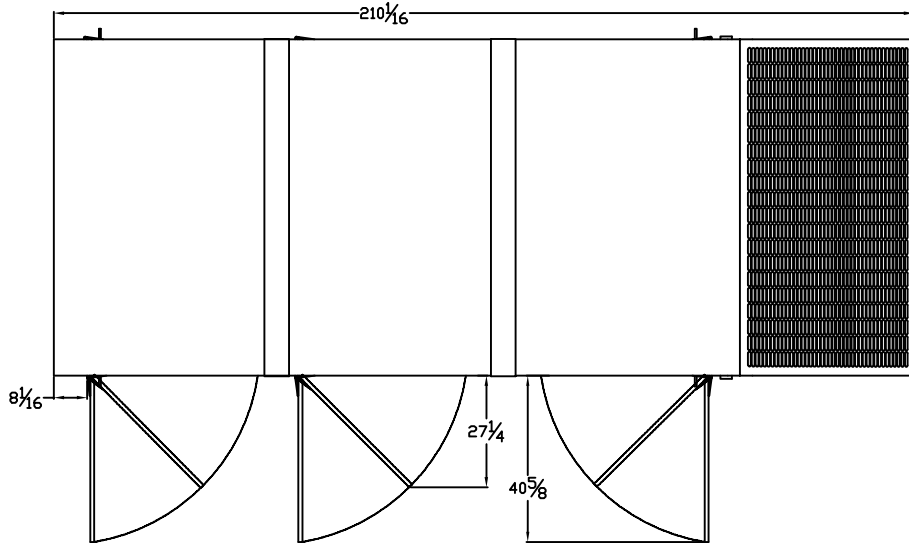


**FRAME VIEW**

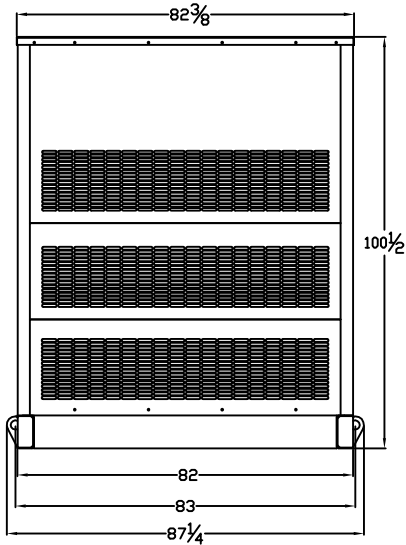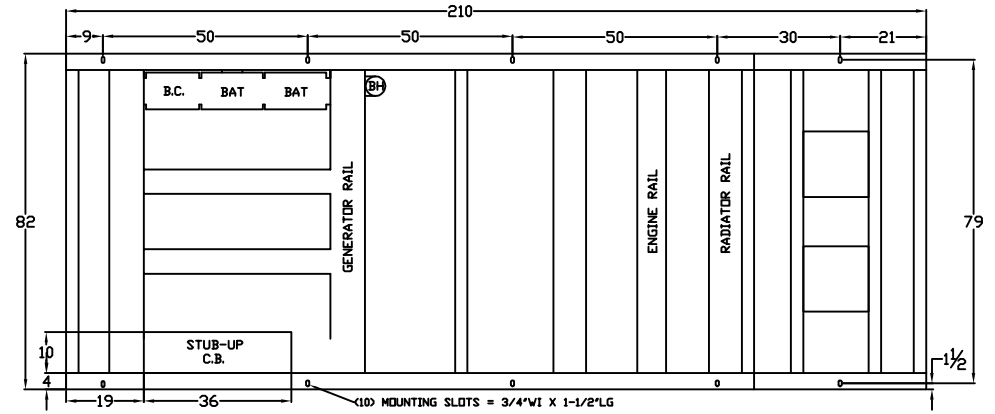

**GENERATOR END VIEW**

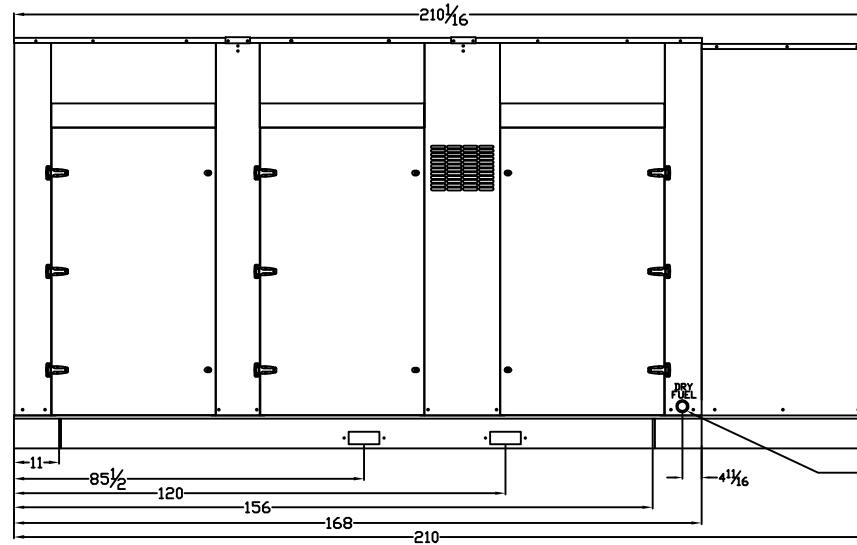

**SIDE VIEW**

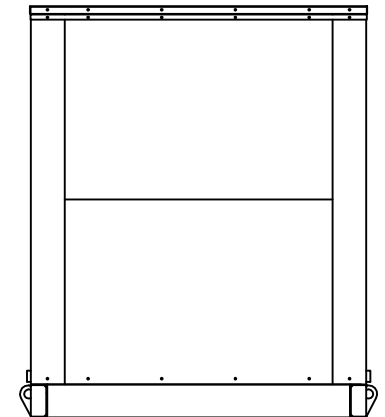

2" 3P NPTF COUPLING FOR DRY FUEL CONNECTION LOCATED ON BOTH SIDES

**RADIATOR END VIEW**