



GILLETTE GENERATORS

LIQUID COOLED DIESEL ENGINE GENERATOR SET

60 HZ MODEL
T4D-3500

Model	HZ	STANDBY	PRIME
		130°C RISE	105°C RISE
T4D-3500-60 HERTZ	60	350	350



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



UL1446, UL508, UL142, UL498



NFPA 110, 99, 70, 37

All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



NEC 700, 701, 702, 708



NEMA ICS10, MG1, ICS6, AB1



ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05




ASCE 7-05 & 7-10

All generator sets meet 180 MPH rating.




EPA 40CFR Part 60, 89, 1039, 1048, 1054, 1065, 1068

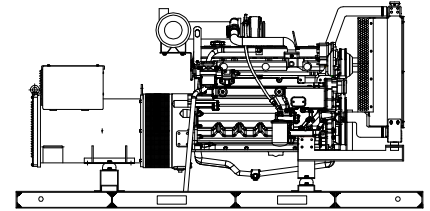

“OPEN” GEN-SET

There is no enclosure, so gen-set must be placed within a weather protected area, uninhabited by humans or animals, with proper ventilation. Silencer not supplied, as installation requirements are not known. However, this item is available as optional equipment.

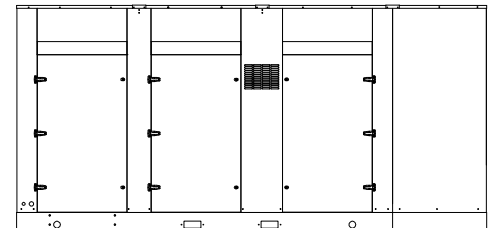

“LEVEL 2” HOUSED GEN-SET

Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	130°C RISE STANDBY RATING		105°C RISE PRIME RATING	
	L-N	L-L			KW/KVA	AMP	KW/KVA	AMP
T4D-3500-3-2	120	208	3	60	350/438	1216	350/438	1216
T4D-3500-3-3	120	240	3	60	350/438	1054	350/438	1054
T4D-3500-3-4	277	480	3	60	350/438	527	350/438	527
T4D-3500-3-5	127	220	3	60	350/438	1150	350/438	1150
T4D-3500-3-16	346	600	3	60	350/438	421	350/438	421

RATINGS: All three phase gen-sets are 12 lead windings, rated at .8 power factor. 130° C “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. 105° C “PRIME RATINGS” are strictly for gen-sets that provide the prime source of electric power, where normal utility power is unavailable or unreliable. A 10% overload is allowed for a total of 1 hour, within every 12 hours of operation, on every PRIME RATED systems. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 130°C (standby), and 105°C (prime) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

APPLICATION & ENGINEERING DATA FOR MODEL T4D-3500-60 HZ

COOLING SYSTEM

Type of System	Air to Air, Charged Air Cooler
Coolant Pump	Pre-lubricated, self-sealing
Cooling Fan Type	Pusher
Fan Diameter inches (cm).....	35.1 (89)
Fan drive ratio.....	1.04:1
Ambient Capacity of Radiator °F (°C).....	131 (55)
Engine Jacket Coolant Capacity gal. (L).....	8.70 (33)
Radiator Coolant Capacity gal. (L).....	16.0 (60)
Water Pump Capacity gpm (L/min).....	122 (462)
Heat Reject Coolant: Btu/min.....	12,682
Air to Air Heat Reject, BTU/min.	11,715
Heat Radiated to Ambient, BTU/min	4,253
Low Radiator Coolant Level Shutdown.....	Standard
Note: Coolant temp. shut-down switch setting at 228°F (109°C) with 50/50 (water/antifreeze) mix.	

COOLING AIR REQUIREMENTS

Combustion Air cfm (m ³ /min)	1,646 (46.6)
Max Air Intake Restrictions:	
Clean Air Cleaner, KPA (psi).....	5 (1.5)
Radiator Cooling Air, SCFM (m ³ /min).....	29,894 (846)

EXHAUST SYSTEM

Exhaust Outlet Size.....	8"
Max. Back Pressure in KPA (in. H ₂ O).....	10 (40)
Exhaust Flow, at rated KW, CFM (m ³ /min).....	4,347 (123)
Exhaust Temp, (Stack) °F (°C)	932 (500)

SOUND LEVELS MEASURED IN dB(A)

	<u>Open</u> <u>Set</u>	<u>Level 2</u> <u>Encl.</u>
Level 2, SCR/Residential Silencer	98.....	83

Note: Open sets (no enclosure) have installed selective catalytic reduction/residential silencer system. Level 2 enclosure has installed selective catalytic reduction/residential silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level

DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 104°F (40°C)

DIMENSIONS AND WEIGHTS

	<u>Open</u> <u>Set</u>	<u>Level 2</u> <u>Enclosure</u>
Length in (cm).....	152 (368)	200 (508)
Width in (cm).....	72 (183)	72 (183)
Height in (cm).....	107 (272)	94 (239)
3 Ø Net Weight lbs (kg).....	9625 (4366) ..	12125 (5500)
3 Ø Ship Weight lbs (kg)	10025 (4547) ..	12525 (5681)

BASLER DGC-2020 DIGITAL MICROPROCESSOR CONTROLLER



Basler DGC-2020

The “2020” controller is a highly advanced integrated gen-set control system for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

Basler “DGC-2020” includes: Generator metering (including three phase) • Engine – Generator protections including IEEE-[27] under voltage, [32] power, [40] loss of excitation, [59] over voltage, [81] over and under frequency, Exercise timer • SAE J1939 engine ECU communications • Expansion capabilities for both inputs and outputs with expansion • Remote communications through RS-485 to Basler’s RDP110 remote Display panel • (16) programmable contact inputs • (15) programmable contact outputs- (3) for up to 30AmpDC and (12) for up to 2 Amp DC • Illuminated Text Display • Front panel menu scroll buttons • Front panel operation mode buttons for STOP, RUN and AUTO • Alarm Silence and Lamp Test buttons

This controller includes expansion features including, RS485 (using MODBUS), direct USB connection with PC, expansion optioned using BESTCOMSPPlus for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional RDP-110 remote display panel module. This featured device will allow Four programmable LEDs (2) alarms and (2) pre-alarms • (17) alarms and pre-alarms displayed from Basler controller • audible alarm horn • lamp test and alarm silence buttons • RD100 local power supply inputs of either 12vdc or 24vdc • connects through Basler controller through RS-485 communications protocol • conduit box included for (2) mounting configurations- either surface mount or semi-flush mounting.

STANDARD FEATURES FOR MODEL T4D-3500-60 HZ

STANDARD FEATURES

CONTROL PANEL:

- Basler DGC-2020 digital microprocessor with logic allows programming in the field. Controller has:
- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
 - Low oil pressure • Engine fail to start
 - High engine temp • Engine over speed
 - Low Radiator Level • Engine under speed
 - Three auxiliary alarms • Over & under voltage
 - Battery fail alarm

Also included is tamper-proof engine hour meter

ENGINE:

- Fuel filter • Full flow Oil filter • Air filter • Fuel pump • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump • Thermostat • Pusher fan and guard • Exhaust manifold • Electronic Governor • 24 VDC battery charging alternator • Flexible fuel and exhaust connectors • Vibration isolators • Open coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator hose • Shut-down sensors for low oil pressure, high coolant temp., low coolant level, high ambient temp.

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

AC GENERATOR SYSTEM:

- AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

VOLTAGE REGULATOR:

- 1% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation


DC ELECTRICAL SYSTEM:

- Battery trays • Battery cables • Battery hold down straps • 3-stage battery charger with float, absorption, & bulk automatic charge stages

WEATHER / SOUNDPROOF ALUMINUM HOUSING:

Corrosion Resistant Protection consisting of:

- (9) Heated and Agitated Wash Stages
- Zinc Phosphate Etching-Coating Stage
- Final Baked on Enamel Powder Coat
- 18/8 Stainless Steel Hardware

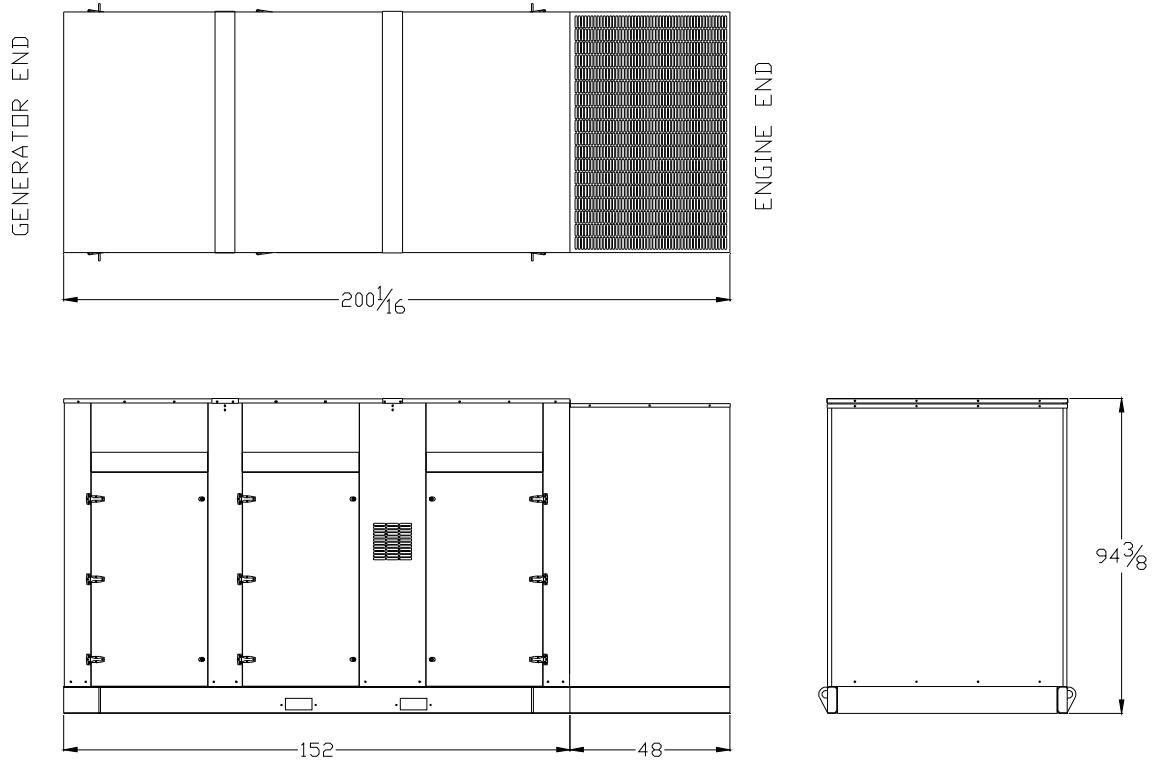

TAD1670-1672VE

16 litre, in-line 6 cylinder - 405, 450 & 515 kW

EU Stage IV / US EPA Tier 4 Final

TAD1670-1672VE is a powerful, reliable and economical off-road Diesel Engine range built on the Volvo in-line six concept.

Low cost of ownership

World class fuel efficiency combined with a reliable exhaust aftertreatment system gives high uptime as well as low cost of ownership. No downtime for regeneration or decreased service intervals.

Compact & simple installation

SCR technology selected by Volvo does not increase amount of cooling capacity needed. As optional equipment all material needed in order to install the engine can be ordered from Volvo Penta. Installation guidelines as well as drawings and CAD models are easy to access. The result is an engine and aftertreatment system that is easy to install with minor impact on existing machine layout.

Durability & low noise

Long experience with SCR systems in combination with base engine development reduces risk of downtime. Well-balanced to produce smooth operation with low noise.

Power & torque

Maximum power and torque available at low rpm. As a result noise as well as fuel consumption is very low. Useful engine speed for the TAD1670-1672VE is due to power and torque layout very flexible

Low exhaust emission

Efficient injection as well as robust engine design in combination with optimised SCR technology and a light EGR contributes to excellent combustion and low fuel consumption.

Easy service & maintenance

Easily accessible service and maintenance points contribute to the ease of service of the engine. As optional equipment possible to remote mount filters and service points.



- Proven and straight-forward design - built on Volvo Group technology
- Low cost of ownership and operation
- High power and torque already at low engine speed
- SCR and light EGR only - no DPF, DOC or regeneration
- Compact, simple installation and easy to service
- Similar engine footprint for all emission standards
- Wide range of optional equipment

Technical description

Engine and block

- Cast iron cylinder block
- Wet, replaceable cylinder liners
- Replaceable valve guides and valve seats
- Overhead camshaft and four valves per cylinder

Lubrication system

- Full flow disposable spin-on oil filter, for extra high filtration
- Gear type lubricating oil pump, gear driven by the transmission
- Oil level sensor at startup

Fuel system

- Electronic high pressure unit injectors
- Fuel prefilter with water separator and water-in-fuel indicator / alarm
- Gear driven low-pressure fuel pump
- Fine fuel filter with manual feed pump and fuel pressure switch

Cooling system

- Available as Power pack or base engine.
- Belt driven coolant pump with high degree of efficiency

Turbo charger

- Electronically controlled Waste-gate

Electrical system

- Engine Management System 2 (EMS 2.3), an electronically controlled processing system which optimizes engine performance.
- The instruments and controls connect to the engine via the CAN SAE J1939 interface. Options available for engine control equipment.

Exhaust aftertreatment system

- SCR and light EGR only
- Airless urea injection
- Wide range of options available, including different sized AdBlue® / DEF tanks (also possible for OEM to design own tank).

**VOLVO
PENTA**

TAD1670-1672VE


Technical Data

General

Engine designation	TAD1670-1672VE
No. of cylinders and configuration.....	in-line 6
Method of operation	4-stroke
Bore, mm (in.).....	144 (5.67)
Stroke, mm (in.).....	165 (6.50)
Displacement, l (in ³).....	16.12 (984)
Dry weight, engine only, kg (lb).....	1322 (2915)

Engine	kW	Hp	rpm	Max Nm
TAD1670VE	405	551	1900	2750
TAD1671VE	450	612	1900	2900
TAD1672VE	515	1800	3200	


Main components - principal layout

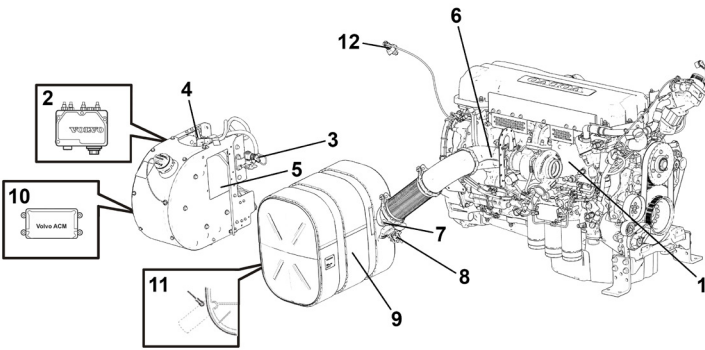


- | | |
|------------------------------------|-------------------------------------|
| 1. Engine | 7. Temperature sensor exhaust |
| 2. Pump unit | 8. Dosage Valve |
| 3. Solenoid valve, heating/cooling | 9. Muffler with catalytic converter |
| 4. AdBlue / DEF level sensor | 10. Aftertreatment control module |
| 5. AdBlue / DEF solution tank | 11. NOx sensor |
| 6. NOx sensor | 12. Temperature sensor air |

Dimensions


Not for installation. Dimensions in mm.

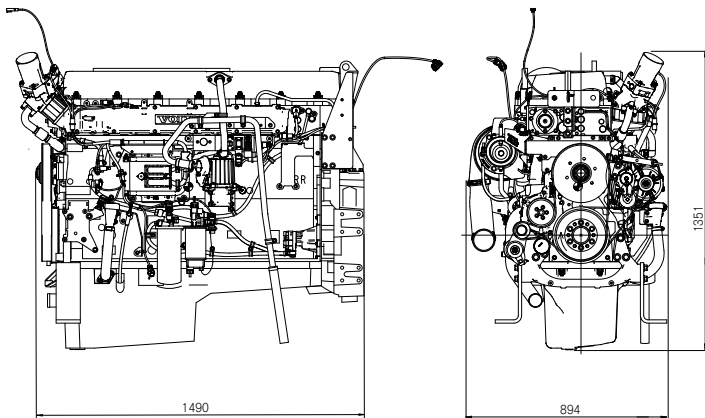


Power, kW

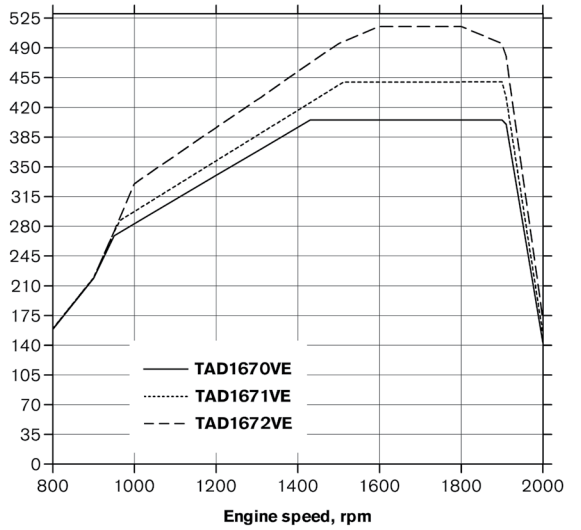

Torque, Nm

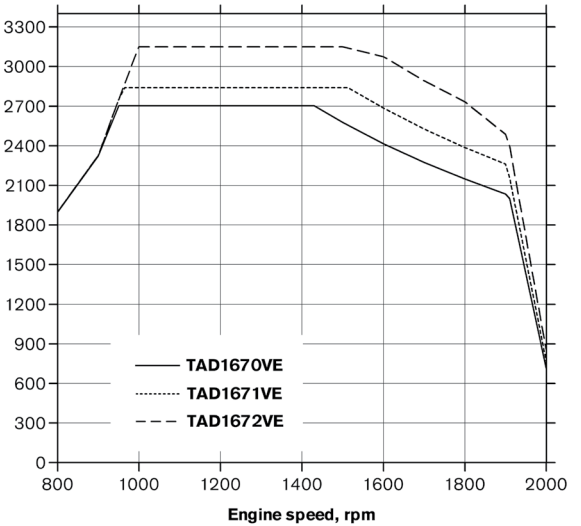

Fuel consumption, g/kWh

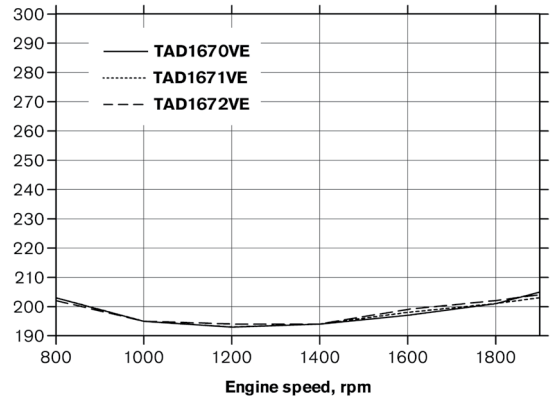

Power standards

The engine performance corresponds to ISO 3046, BS 5514 and DIN 6271. The technical data applies to an engine without cooling fan and operating on a fuel with calorific value of 42.7 MJ/kg (18360 BTU/lb) and a density of 0.84 kg/litre (7.01 lb/US gal, 8.42 lb/Imp gal), also where this involves a deviation from the standards.

Additional information

For additional information, please contact your Volvo Penta representative or visit www.volvopenta.com.

VOLVO PENTA

AB Volvo Penta


SE-405 08 Göteborg, Sweden
www.volvopenta.com

Not all models, standard equipment and accessories are available in all countries. All specifications are subject to change without notice. The engine illustrated may not be entirely identical to production standard engines.

® = Registered trademark of the Verband der Automobilindustrie e.V. (VDA).

Important

This Technical Data Sheet and the corresponding Installation Instructions provide important information to ensure the installed engine will operate according to the design specification in the Volvo Penta application for certification.

Requirements marked with  are considered as critical for exhaust emissions compliance according to the design specification in the Volvo Penta application for certification.

Failing to follow and meet these instructions and requirements when installing a certified engine in a piece of nonroad equipment for use in the United States violates U.S. federal law (40 CFR 1068.105(b)), subject to fines or other penalties as described in the Clean Air Act.

General

In-line four stroke diesel engine with direct injection. Rotation direction, counterclockwise viewed towards flywheel

Number of cylinders			6
Displacement, total		liters	16,12
		in ³	984
Firing order			1-5-3-6-2-4
Bore		mm	144
		in	5,67
Stroke		mm	165
		in	6,50
Compression ratio			17,0:1
Wet weight	Engine only (Estimated) (excl after treatment comp.)	kg	1395
		lb	3075
	Power pac	kg	
		lb	

Performance

				rpm	1200	1500	1800	1900
IFN Power	405 kW	without fan		kW	339	405	405	405
				hp	461	551	551	551
		with fan		kW	332	391	382	378
		890 mm		hp	452	532	519	514
Torque at:		IFN Power		Nm	2698	2578	2149	2036
				lbf ft	1990	1902	1585	1501
Max torque at engine speed		rpm	1260 rpm	Nm	2750			
				lbf ft	2028			
Power tolerance				%	±2			
Mean piston speed				m/s	6,6	8,3	9,9	10,5
				ft/sec	21,7	27,1	32,5	34,3
Effective mean pressure at:		IFN Power		MPa	2,10	2,01	1,67	1,59
				psi	305	291	243	230
Max combustion pressure at:		IFN Power		MPa	15	15	16	16
				psi	2175	2175	2320	2320
Total mass moment of inertia, J (mR ²) (not including flywheel)				kgm ²	4,1			
				lbft ²	97,3			
Friction Power				kW	26	39	58	65
				hp	35	53	79	88

Derating see below diagrams

VOLVO PENTA TAD1670VE	Document No	Issue Index
	22293860	04

Engine brake performance (only engines with VCB)		rpm	1200	1500	1900	2200
Brake power:	without fan	kW	85	152	284	345
		hp	116	207	386	469
Brake torque:	without fan	Nm	676	968	1427	1498
		lbf ft	499	714	1053	1104
Engine speed range for VCB activation:		rpm	1000-2200			
Min engine speed with VCB still active:		rpm	900			
Min oil temperature for VCB activation:		°C	55			

Cold start performance

*Cold start limit temperature	without starting aid	°C	-10		
		°F	14		
	with manifold heater 2 kW	°C	-25		
		°F	-13		
with manifold heater 2 kW and block heater	°C	-30			
	°F	-22			
*Specify oil and fuel quality	T>-15°C Oil VDS4/VDS3 15W/40 T<-15°C Oil VDS4/VDS3 5W/40				
Heater type	Make	Power kW	Engaged hours	Cooling water temp engine block	
Self circulating	Volvo 21578298	2	12	1°C 34°F	

* See also general section in the sales guide

Lubrication system

Lubricating oil consumption at max rpm at:	IFN Power	liter/h	0,03
		US gal/h	0,008
Oil system capacity including filters	liter	48	
	US gal	12,68	
Oil pan capacity: (both variants)	Max	liter	42
		US gal	11,10
	Min	liter	32
		US gal	8,45
Oil change intervals/specifications	VDS3	h	1000 / See manual
	VDS4	h	1000 / See manual
Engine angularity limits:	front up	°	30
	front down	°	30
	side tilt	°	30
Oil pressure at rated speed	kPa	300 - 650	
	psi	44 - 94	




Lubrication system

Lubrication oil temperature in pan:	max	°C	130
		°F	266
Oil filter micron size		μ	40

Fuel system

System supply flow at max. Speed	liter/h US gal/h	165 43,6
Fuel supply line max. restriction (measured at fuel inlet connection)	kPa psi	10 1,5
Fuel supply line max. pressure, during engine stand still (measured at fuel inlet connection)	kPa psi	
Max system return flow	liter/h US gal/h	30,0 7,9
Fuel return line max. restriction (measured at fuel return connection)	kPa psi	20 2,9
Max. allowable inlet fuel temp (Measured at fuel inlet connection)	°C °F	60 140
Prefilter / Water separator micron size	μ	10
Fuel filter micron size	μ	5
Engine Control System, standard	Volvo/EMS2.3	
Specific UREA consumption, NRTC	Vol%	5,6
Fuel to conform to	Fuel equal to or better than EN590:2009 or ASTM D975-09 and Max sulphur 15ppm	



Intake and exhaust system

		rpm	1200	1500	1800	1900
Change air consumption at: (+25°C and 100kPa)	IFN Power	m³/min cfm	24,9 879	30,1 1063	32,7 1155	33,9 1197
 See front page for important information						
Max allowable air intake restriction including piping		kPa psi			6 0,9	
Heat rejection to exhaust at:	IFN Power	kW BTU/min	241 13705	297 16890	304 17288	312 17743
Exhaust gas temperature after turbine at:	IFN Power	°C °F	455 851	480 896	465 869	465 869
 See front page for important information						
Max allowable back pressure in exhaust line (after turbine) Pipe dimension Ø: 125 mm		kPa psi	18 2,6	24 3,5	28 4,1	29 4,2
 See front page for important information						
Max allowable temperature drop between turbine and SCR muffler inlet.		Δ°C Δ°F	10 18	10 18	10 18	10 18
SCR muffler pressure drop (at exhaust gas flow and exhaust temp given)		kPa psi	16 2,3	22 3,2	24 3,5	25 3,6
Exhaust gas flow at: (temp and pressure after turbine at the corresponding power setting)	IFN Power	m³/min cfm	63,0 2225	78,0 2755	81 2861	83 2931

Cooling system

			rpm	1200	1500	1800	1900
Heat rejection radiation from engine at:	IFN Power	kW	7	7	7	7	
		BTU/min	398	398	398	398	
Heat rejection to coolant at:	IFN Power	kW	134	158	170	177	
		BTU/min	7620	8985	9668	10066	
Coolant		Volvo Penta coolant "ready mix" or Volvo Penta coolant mixed with clean fresh water 40 / 60					
Radiator cooling system type		Closed circuit					
Standard radiator core area	IFN/ICFN Power	m ²	1,31				
		foot ²	14,10				
Fan diameter	890 mm	IFN/ICFN Power	mm	890			
			in	35,04			
Fan power consumption	890 mm	kW	3,5	6,8	11,7	13,5	
		hp	5	9	16	18	
Fan drive ratio	fan Ø890		0,88				
Coolant capacity:	engine	liter	33				
		US gal	8,7				
	std. 1,31m ² radiator with hoses	liter	60				
		US gal	15,9				
Coolant pump		drive/ratio	belt/1,77:1				
Coolant flow with standard system		l/s	4,7	5,8	7	7,3	
		US gal/s	1,2	1,5	1,8	1,9	
Minimum coolant flow		l/s	4,3	5,4	6,6	6,9	
		US gal/s	1,1	1,4	1,7	1,8	
Maximum outer circuit restriction incl. piping		kPa	70,0				
		psi	10,2				
Thermostat:	start to open	°C	82				
		°F	180				
	fully open	°C	92				
		°F	198				
Maximum static pressure head (expansion tank height + pressure cap setting)		kPa	100				
		psi	14,5				
Minimum static pressure head (expansion tank height + pressure cap setting)		kPa	70				
		psi	10,2				
Standard pressure cap setting		kPa	75				
		psi	10,9				
Maximum top tank temperature		°C	107				
		°F	225				
Recommended Draw down capacity. The difference between min coolant level in the expansion tank and the lowest level where the engine's coolant system still are functioning		liter	2				
		US gal	0,5				

Charge air cooler system

		rpm	1200	1500	1800	1900
Heat rejection to charge air cooler	IFN Power	kW	58	86	86	90
		BTU/min	3298	4891	4891	5118
Charge air mass flow	IFN Power	kg/s	0,49	0,58	0,62	0,65
Charge air inlet temp. (Charge air temp after turbo compressor)	IFN Power	°C	161	164	165	166
		°F	322	327	329	331
 See front page for important information Max allowable Charge air outlet temp. (Charge air temp after charge air cooler)		°C	40	45	50	50
		°F	104	113	122	122
 See front page for important information Maximum pressure drop over charge air cooler incl. piping		kPa	13			
		psi	1,89			
Charge air pressure (After charge air cooler)		kPa	190	185	163	163
		psi	27,56	26,83	23,64	23,64
Standard charge air cooler core area		m ²	1,3			
		foot ²	13,99			

Cooling performance: 1,3 m² radiator and Pull 890 fan (fixed ratio)

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 107°C TTT and 40% coolant. Valid at 1 atm.

Engine speed	Engine power	Air on temp		Air flow		External restriction	
1900 0.88 (fix ratio)	405 551	45	113	6	211,9	740	0,107
		50	122	6,7	236,6	590	0,086
		55	131	7,6	268,4	400	0,058
		60	140	8,6	303,7	180	0,026
		63	145	9,4	332,0	80	0,012
		65	149	10,1	356,7	0	

Cooling performance: 1,3 m² radiator and Push 890 fan (fixed ratio)

Cooling air flow and maximum additional external restriction at different radiator air temperatures based on 103°C TTT and 40% coolant. Valid at 1 atm.

Engine speed	Engine power	Air on temp		Air flow		External restriction	
1900 0,88 (fix ratio)	405 551	56	133	7	247,2	300	0,044
		58	136	7,4	261,3	210	0,030
		59	138	7,7	271,9	150	0,022
		60	140	7,9	279,0	100	0,015
		62	144	8,2	289,6	0	

Engine management system

Functionality	Alternatives			Default setting
Governor mode	Isochronous			
Governor droop	0			
Governor response	Adjustable PI-constants			1
Idle speed	600-900			700
Stop function	Energized to run/Stop			
Preheating function	On/Off			
Lamp test	On/Off			

Engine sensors and switch settings		Alarm level		Engine protection	
Parameter	Unit	Setting range	Default setting	Level	Action. Default/Alternative
Oil temp	°C	Setting +5	125		Shut down, ON/OFF*
Oil pressure	Low idle	kPa	50	25,0	Shut down, ON/OFF*
	Rated speed	kPa	300	275	Shut down, ON/OFF*
Oil level					
Piston cooling pressure >1000 rpm	kPa				
Coolant temp	°C	107	105		Shut down, ON/OFF*
Coolant level		See cooling system	On		
Fuel feed pressure	1200rpm	kPa	250		
Water in fuel					
Crank case pressure	kPa				Shut down,
Air filter pressure drop			5		
Altitude, above sea	m				Automatic derating, see section derating
Charge air temp	°C	85	80		Shut down, ON/OFF*
Charge air pressure	kPa	Alarm map value +5kPa	Warning map value +5kPa		Shut down, ON/OFF*
Engine speed	rpm	100-120 % of rated speed	120% of rated speed	Alarm level	Shut down, ON/OFF*

* Off means no shut down, alarm only



Parameter	Warning	Alarm	Derated 0% to engine protection map	Derated 100% to engine protection map	Forced idle after sec	Forced shut down after 2 sec
Coolant temp	101°C	107°C	107°C	108°C	N/A	N/A
Oil temp	125°C	127°C	127°C	130°C	N/A	N/A
Low oil pressure	Warning	Alarm	N/A	N/A	N/A	Alarm map value
High charge air temp	80°C	85°C	85°C	86°C	N/A	N/A
High charge air pressure	Warning map value	Alarm map value	Alarm map value	Alarm map value	N/A	N/A
Parameters						


Electrical system



Voltage and type		24V	
Alternator:	make	Bosch	
	output	A	110/150
	tacho output	Hz/alternator rev.	6
	drive ratio	3,9:1	
Starter motor:	make	Melco	
	type	105P70	
	output	kW	7
		hp	9,5
Number of teeth on:	flywheel	153	
	starter motor	12	
Max wiring resistance main circuit		mΩ	2
Cranking current at +20°C		A	280
Crank engine speed at 20°C		rpm	150
Starter motor battery capacity	max	Ah/A	2x225
	min at +5°C	Ah/A	
Inlet manifold heater (at 20 V)		kW	2
Power relay for the manifold heater		A	1


Power take off



		rpm	1200	1500	1800	1900
Front end belt pulley load. Direction of load viewed from flywheel side:	max left	kW	26	33	40	
		hp	35	45	54	
	max down	kW	60	75	90	
		hp	82	102	122	
	max right	kW	26	33	40	
		hp	35	45	54	
Timing gear at compressor PTO max:		Nm lbf ft	600 443			
Speed ratio direction of rotation viewed from flywheel side		1,31:1 / Counterclockwise				
Timing gear at servo pump max:		Nm lbf ft	100 74			
Speed ratio direction of rotation viewed from flywheel side		1,58:1 / Counterclockwise				
Max allowed bending moment in flywheel housing		Nm lbf ft	15000 11063			
Max. rear main bearing load		N lbf	5000 1124,0			

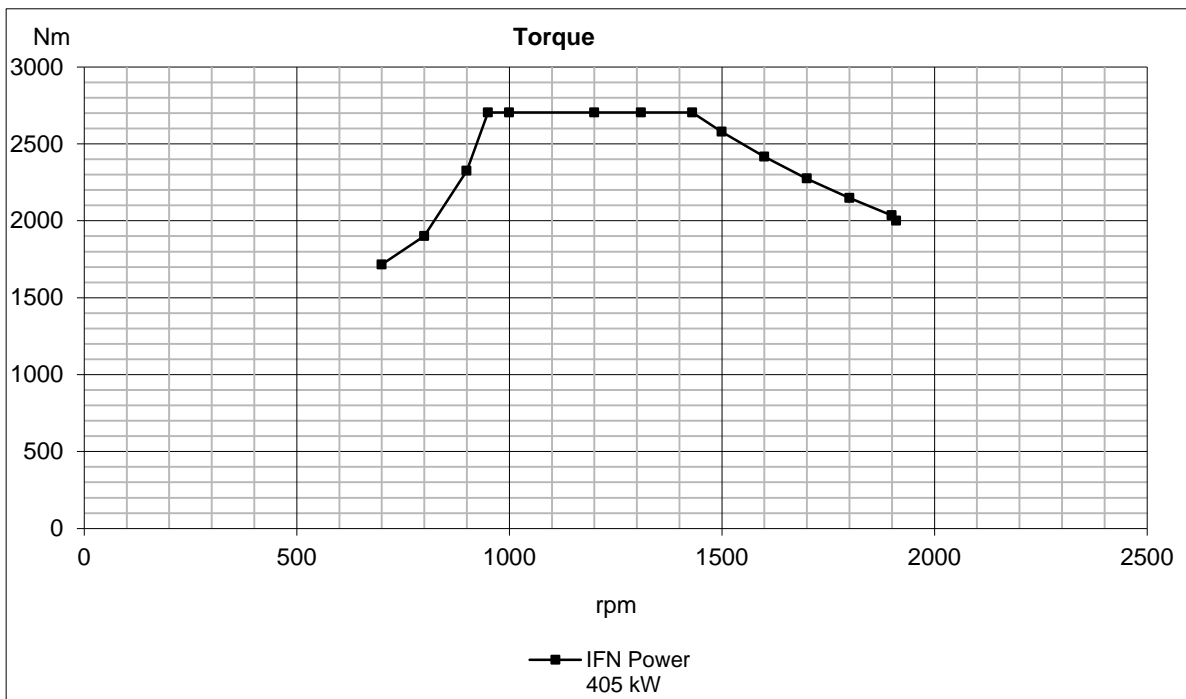
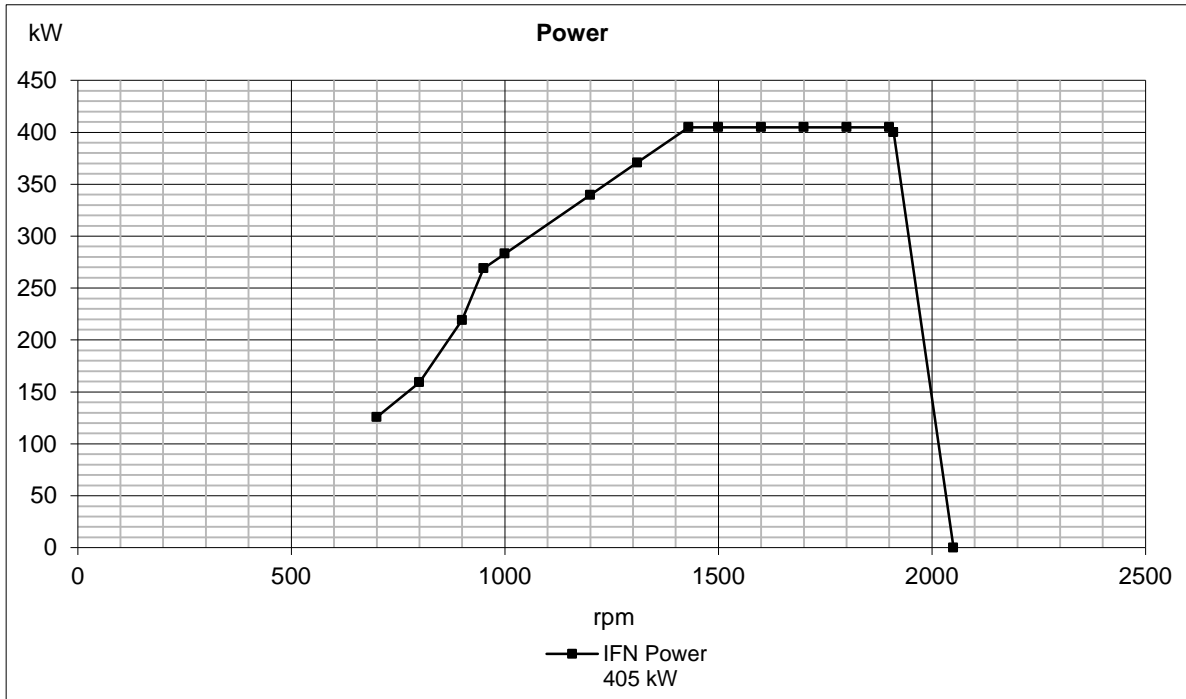



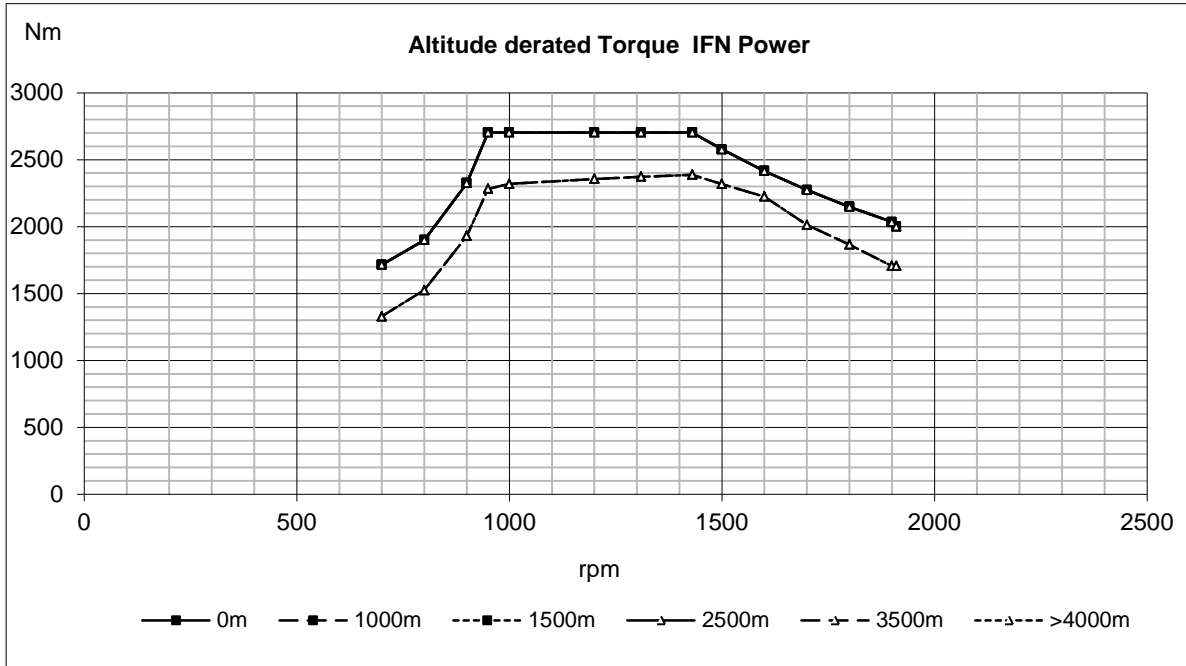


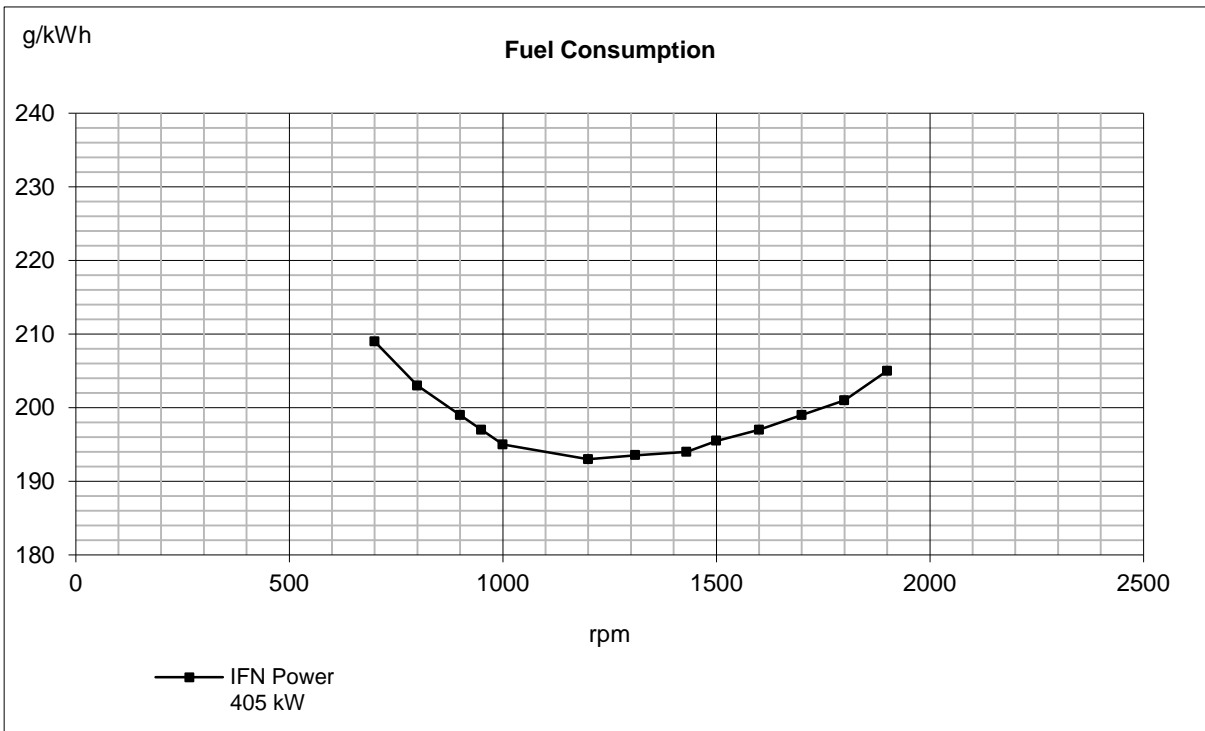
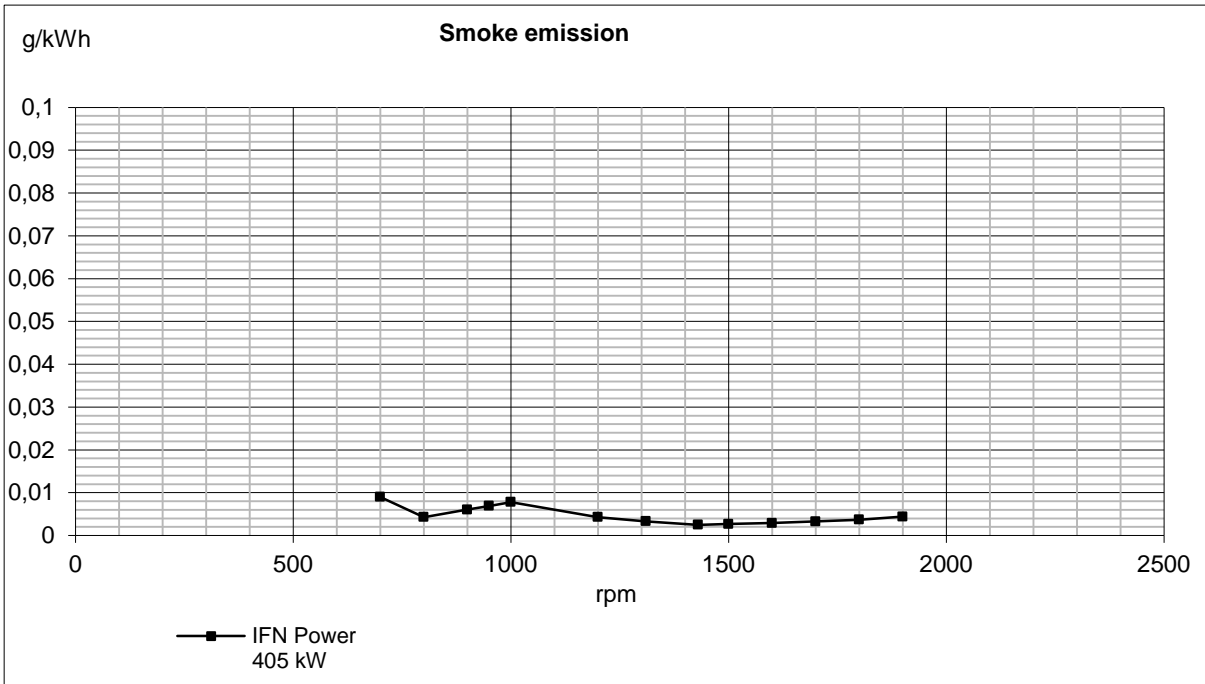


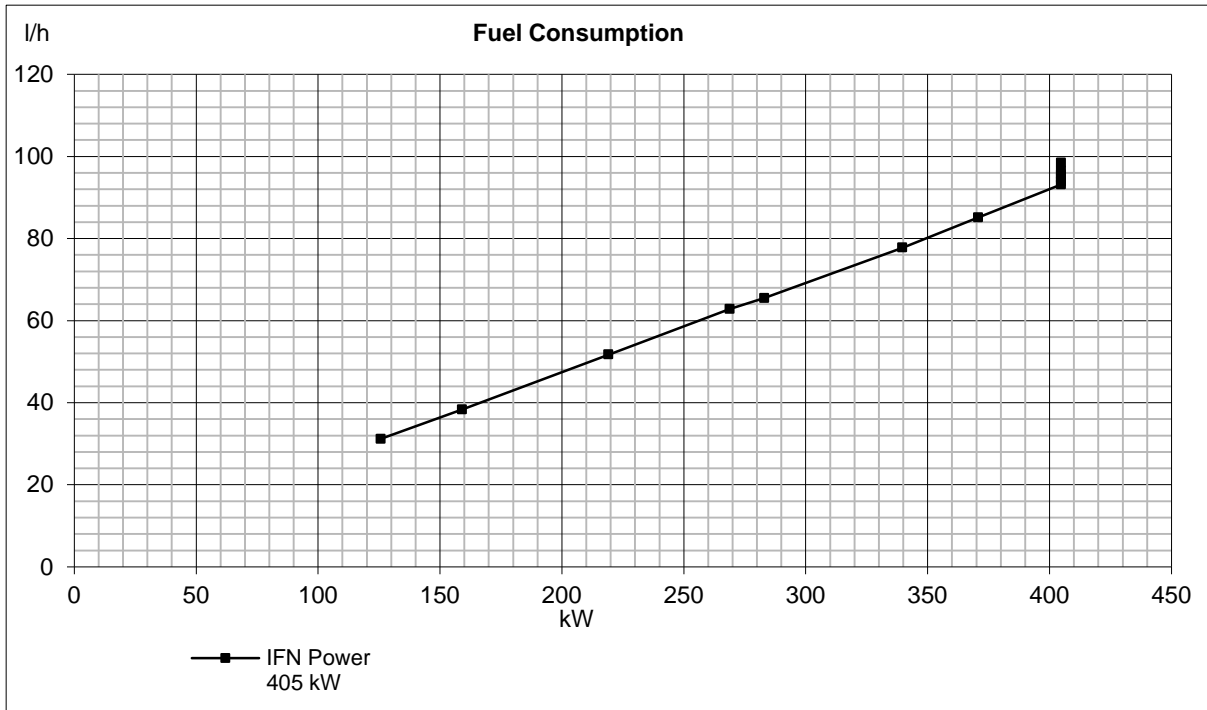

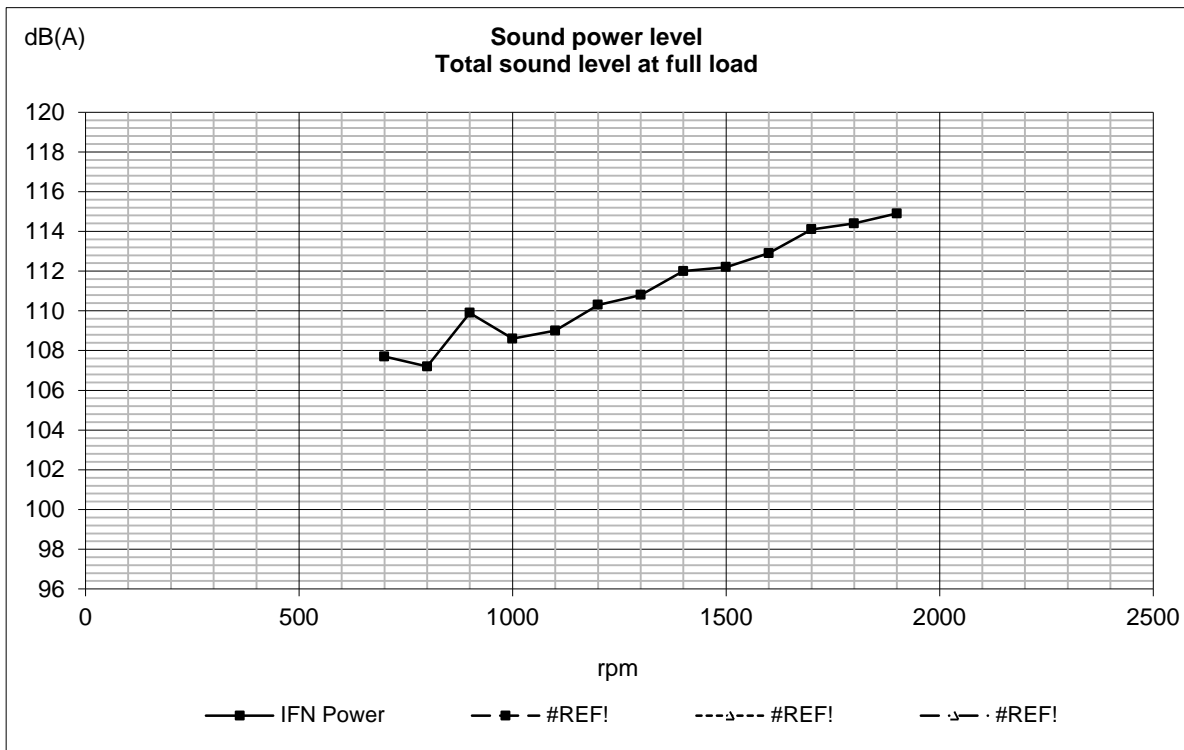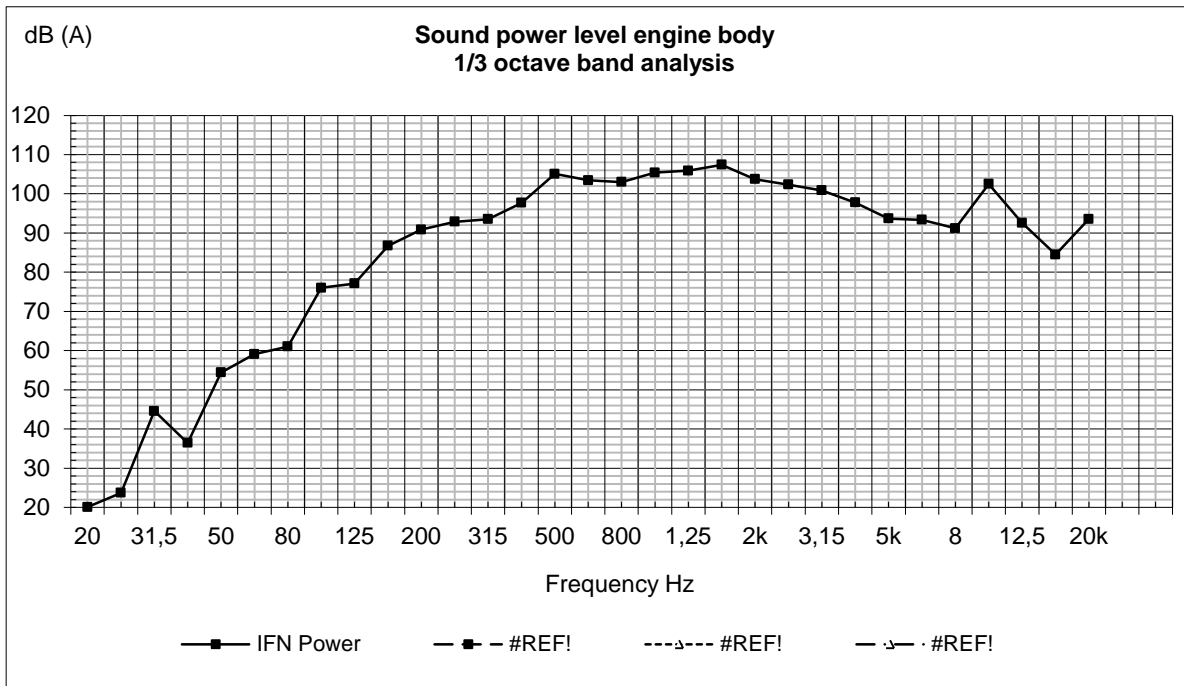


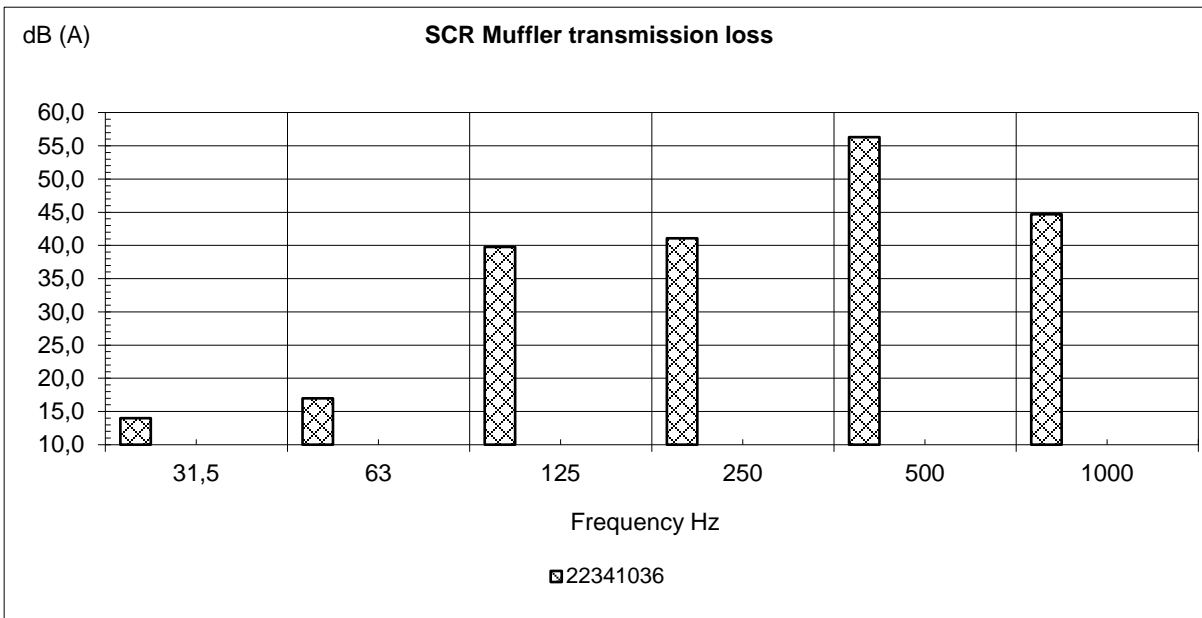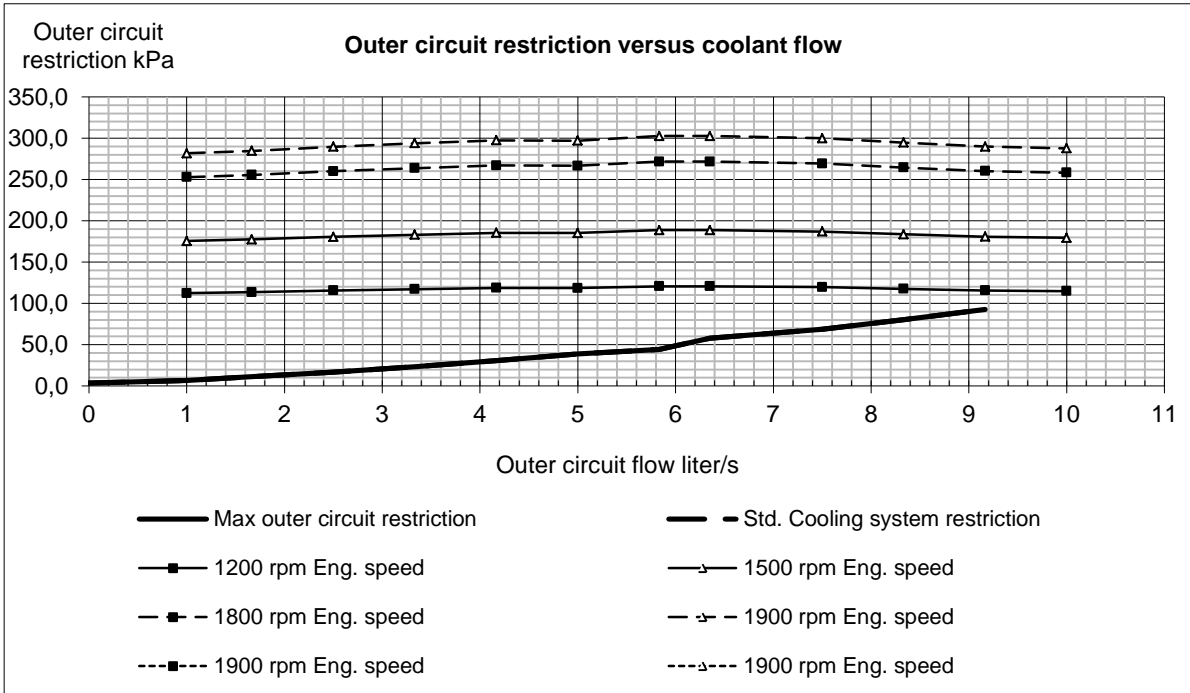

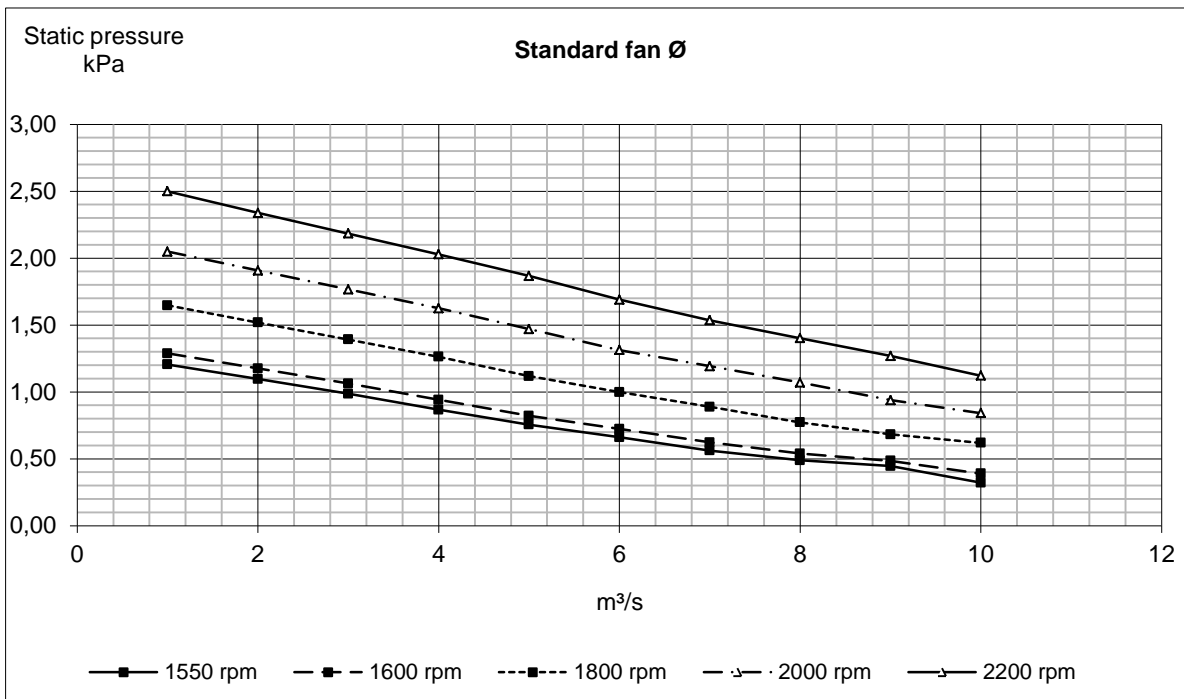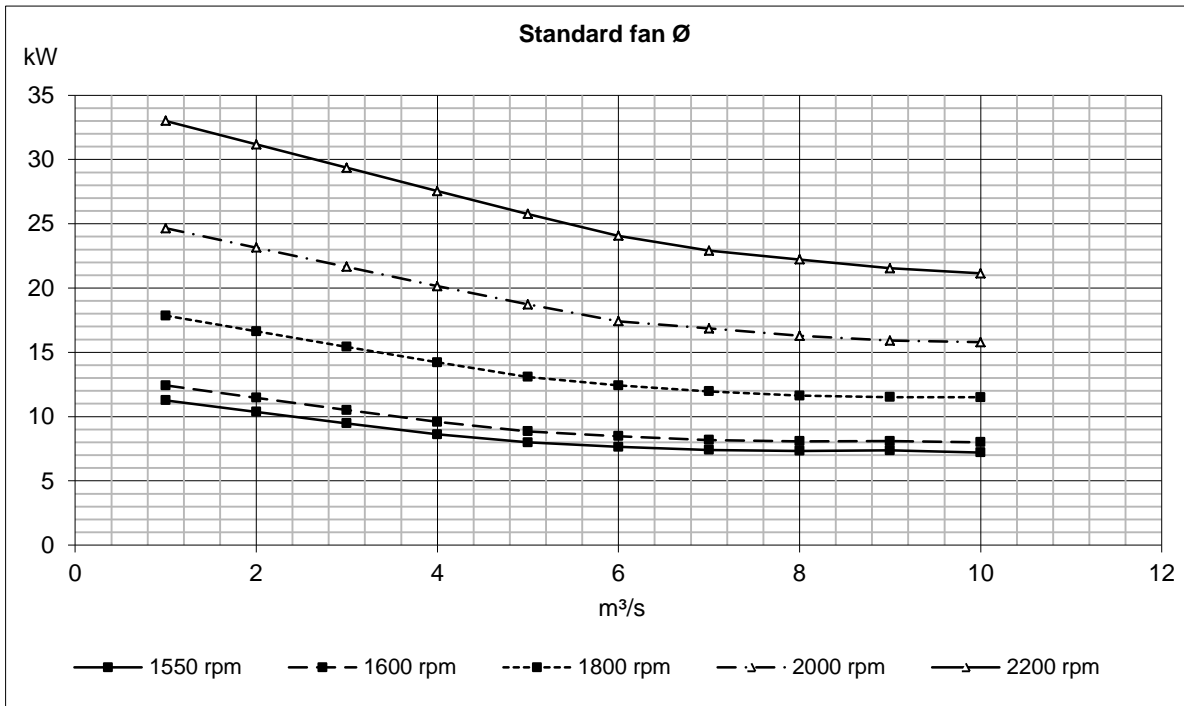


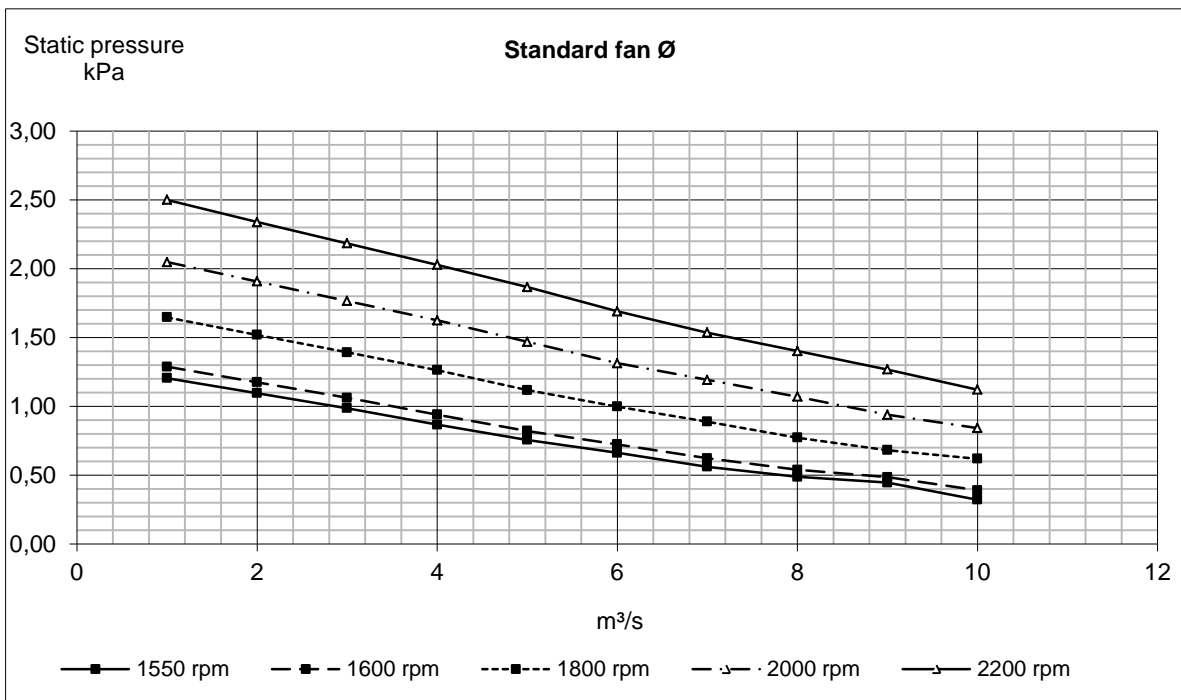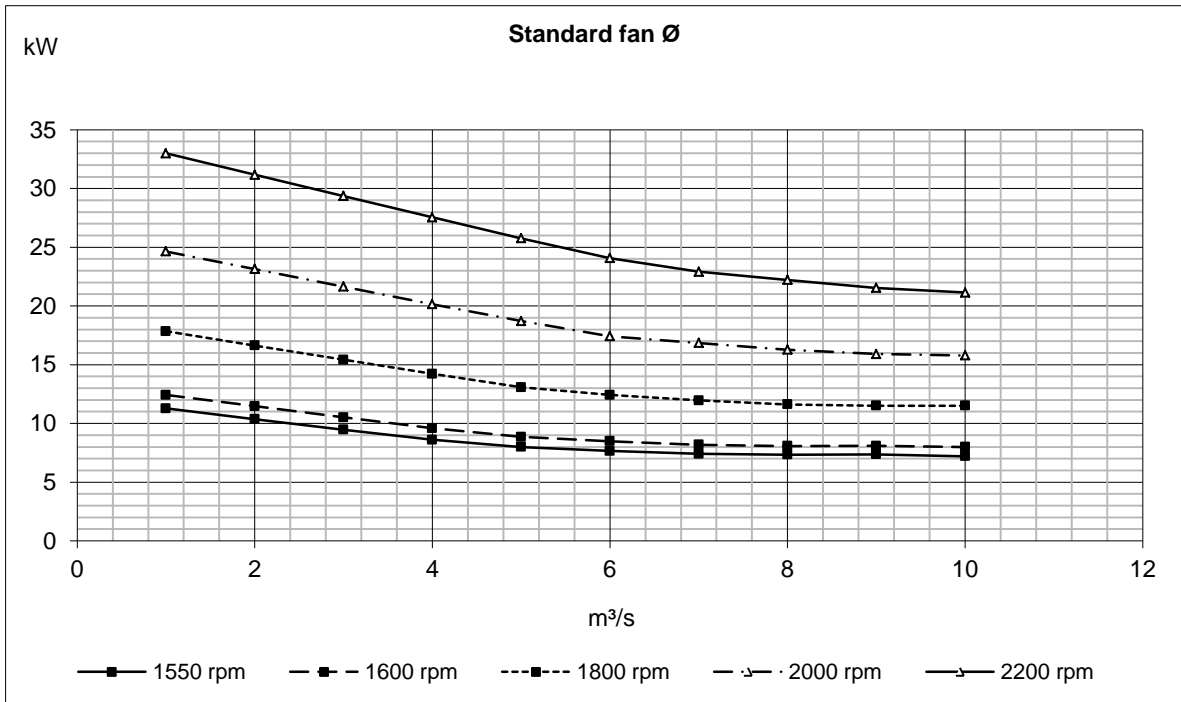

BSFC [g/kWh]

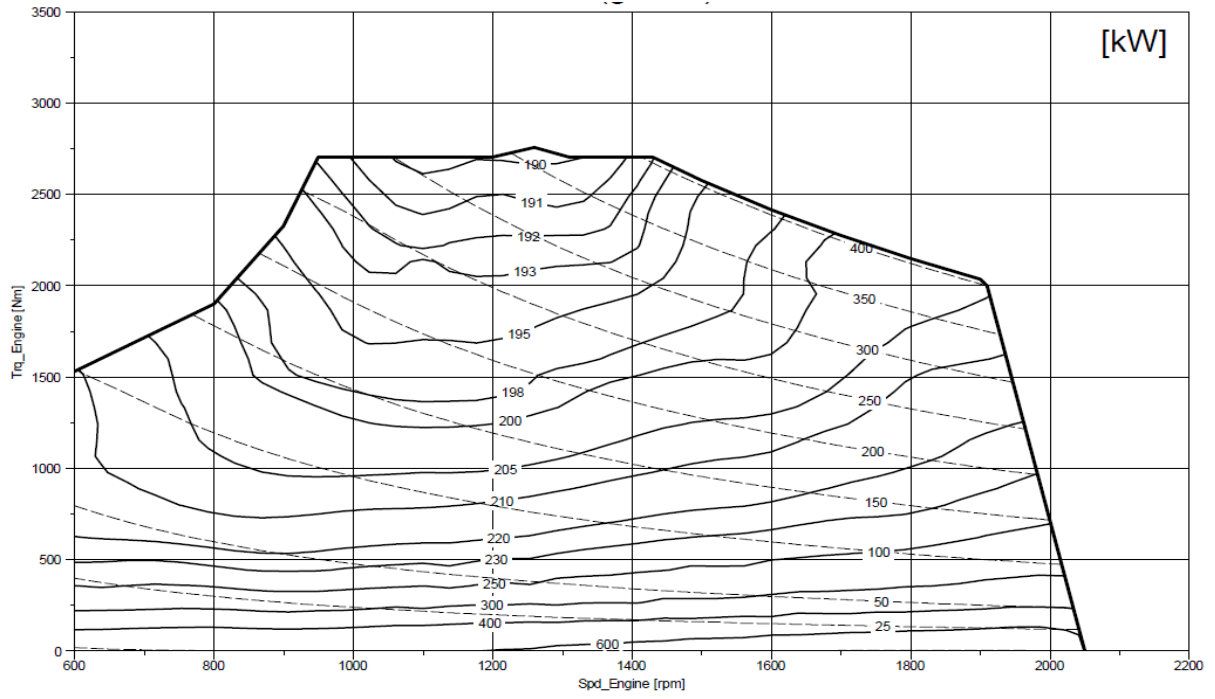

Fuel consumption [l/h]

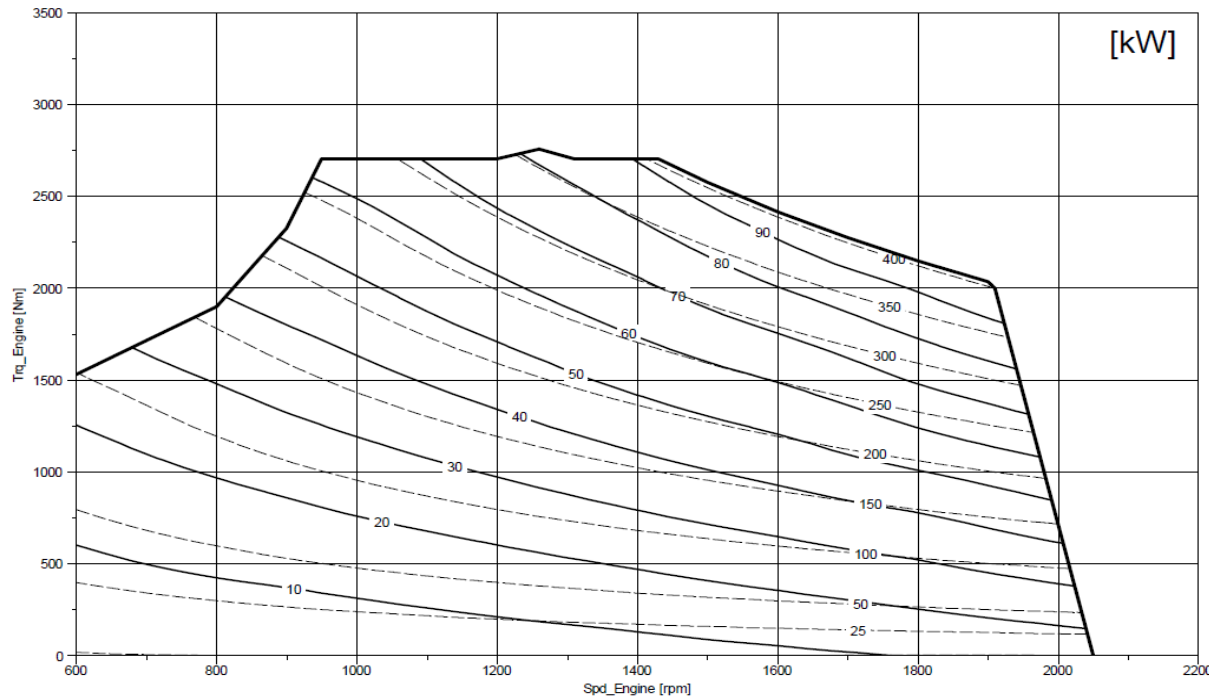

S4L1D-G41 Wdg.311 - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	AS440	MX341	MX321		
Voltage Regulation	± 1%	± 1%	± 0.5%		with 4% Engine Governing
AVR Power	Self-Excited	PMG	PMG		

No Load Excitation Voltage (V)	12-10
No Load Excitation Current (A)	0.7-0.6
Full Load Excitation Voltage (V)	48-45
Full Load Excitation Current (A)	2.6-2.4
Exciter Time Constant (seconds)	0.105

STAMFORD

S4L1D-G41 Wdg.311

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Lap							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	15.8292							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air	0.78 m ³ /sec				0.94 m ³ /sec			
Voltage Star	380	400	415	440	416	440	460	480
kVA Base Rating (Class H) for Reactance Values	430	450	450	430	500	535	540	560
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.39	3.20	2.97	2.53	3.96	3.79	3.50	3.33
X'd Dir. Axis Transient	0.18	0.17	0.16	0.13	0.20	0.19	0.18	0.17
X''d Dir. Axis Subtransient	0.11	0.10	0.09	0.08	0.13	0.12	0.11	0.11
Xq Quad. Axis Reactance	2.63	2.48	2.31	1.96	3.07	2.93	2.71	2.58
X''q Quad. Axis Subtransient	0.32	0.30	0.28	0.24	0.37	0.36	0.33	0.31
XL Stator Leakage Reactance	0.09	0.09	0.08	0.07	0.10	0.10	0.09	0.09
X2 Negative Sequence Reactance	0.19	0.18	0.17	0.15	0.22	0.21	0.19	0.19
X0 Zero Sequence Reactance	0.03	0.03	0.02	0.02	0.03	0.03	0.03	0.02
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	4.07	3.84	3.57	3.03	4.75	4.54	4.20	4.00
X'd Dir. Axis Transient	0.20	0.19	0.18	0.15	0.23	0.22	0.20	0.19
X''d Dir. Axis Subtransient	0.13	0.12	0.11	0.09	0.15	0.14	0.13	0.13
Xq Quad. Axis Reactance	2.71	2.56	2.38	2.02	3.16	3.02	2.79	2.66
X''q Quad. Axis Subtransient	0.38	0.36	0.34	0.29	0.45	0.43	0.39	0.38
XL Stator Leakage Reactance	0.10	0.10	0.09	0.08	0.12	0.11	0.10	0.10
Xlr Rotor Leakage Reactance	0.11	0.11	0.10	0.09	0.13	0.13	0.12	0.11
X2 Negative Sequence Reactance	0.23	0.22	0.21	0.17	0.26	0.25	0.23	0.22
X0 Zero Sequence Reactance	0.03	0.03	0.03	0.02	0.03	0.03	0.03	0.03

STAMFORD®

S4L1D-G41 Wdg.311

Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.068	
T" d SUB-TRANSTIME CONST.	0.014	
T'do O.C. FIELD TIME CONST.	2.1	
Ta ARMATURE TIME CONST.	0.016	
T"q SUB-TRANSTIME CONST.	0.0092	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.0066	
Rotor Winding Resistance (Rf)	1.44	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.00825	
Negative Sequence Resistance (R2)	0.009504	
Zero Sequence Resistance (R0)	0.00825	
Saturation Factors	400V	480V
SG1.0	0.24	0.24
SG1.2	0.99	0.99
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0.5, 1	N/A
Moment of Inertia	5.6754kgm ²	N/A
Weight Wound Stator	561kg	N/A
Weight Wound Rotor	482kg	N/A
Weight Complete Alternator	1190kg	N/A
Shipping weight in a Crate	1260kg	N/A
Packing Crate Size	155 x 87 x 107 (cm)	N/A
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	N/A
Bearing Non-Drive End	Ball 6314	N/A









STAMFORD®

S4L1D-G41 Wdg.311

THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

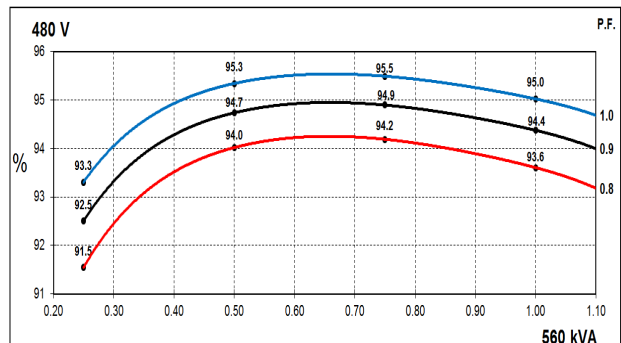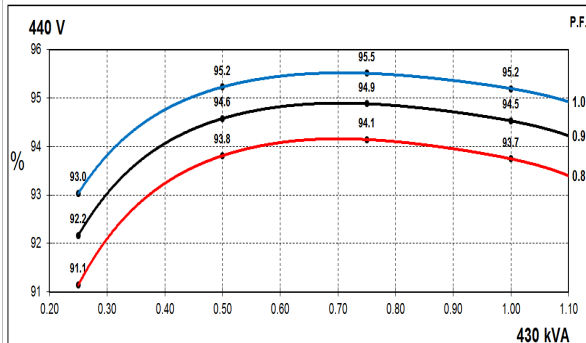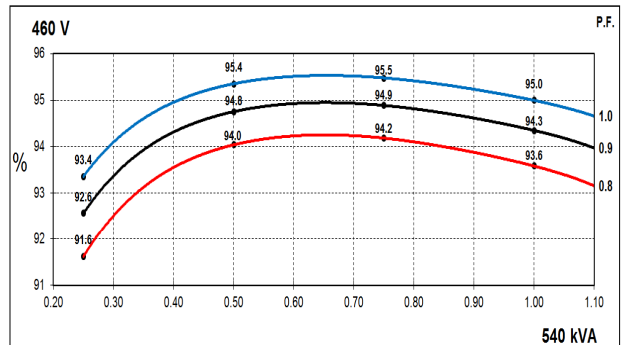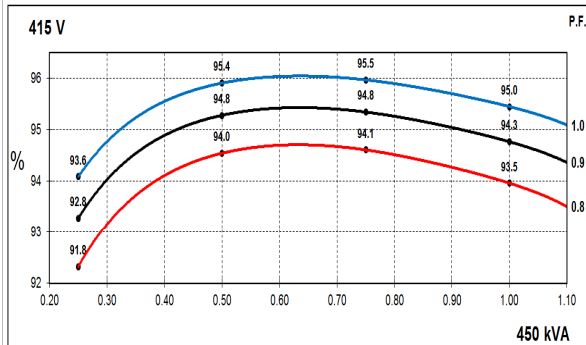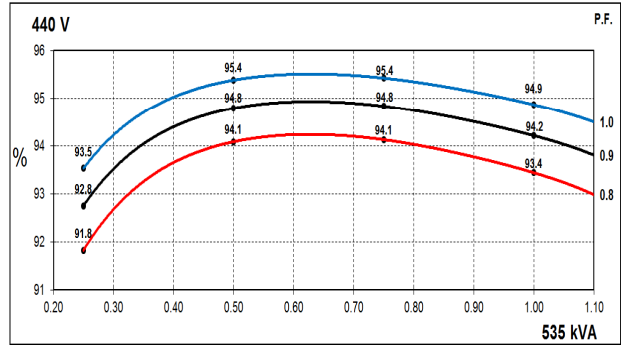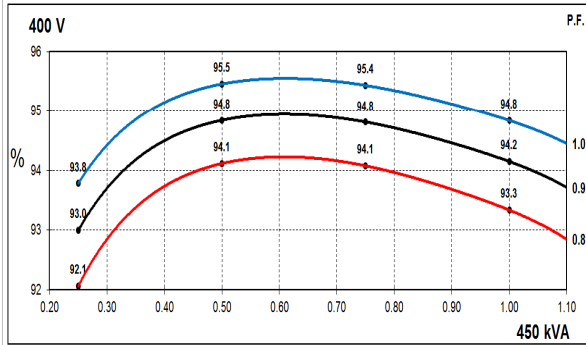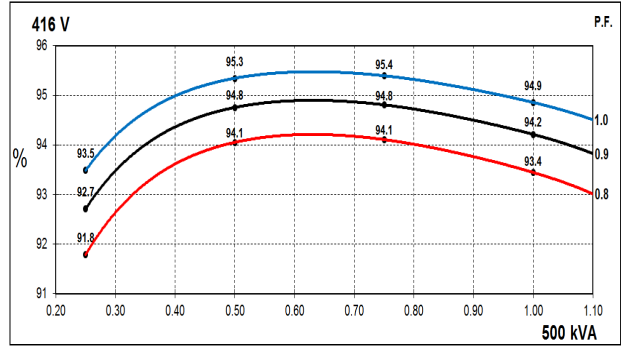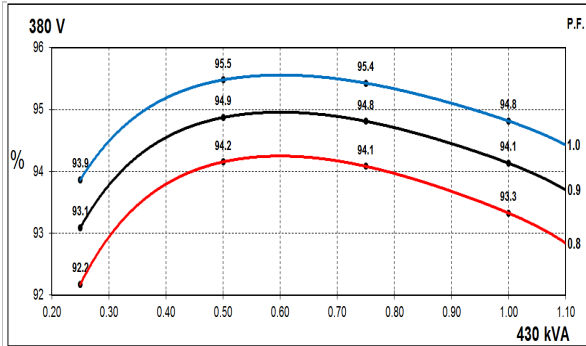


STAMFORD


S4L1D-G41 Wdg.311

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

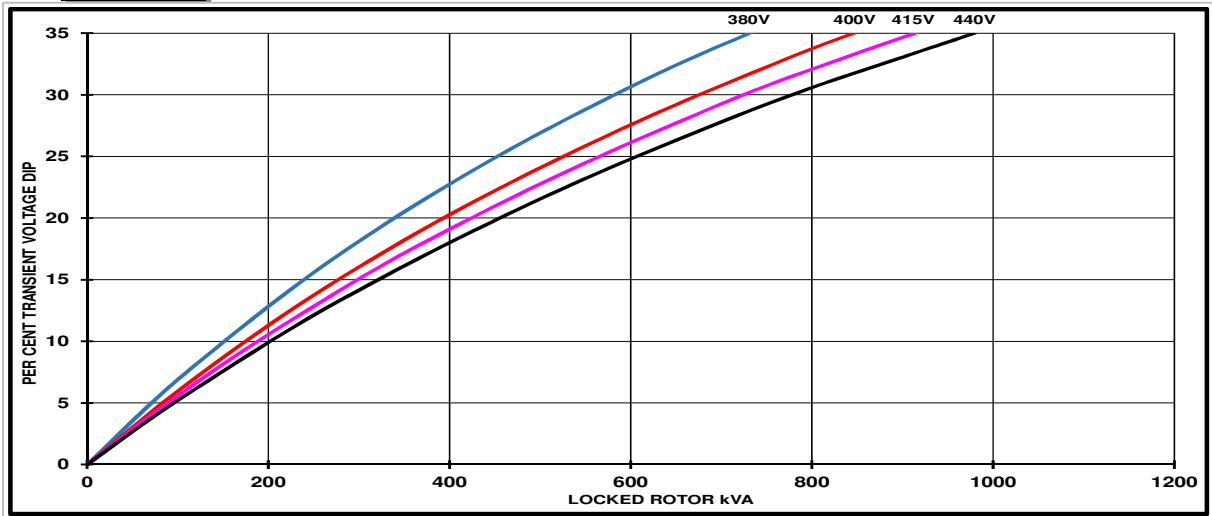

60Hz

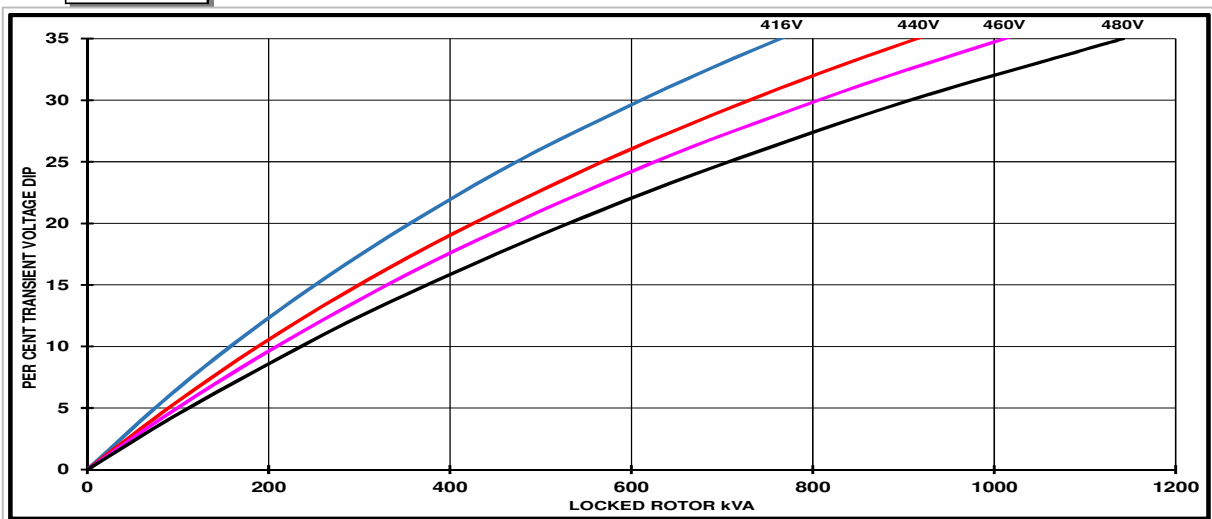


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1	
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

STAMFORD


S4L1D-G41 Wdg.311

Locked Rotor Motor Starting Curves - Self Excited

50Hz

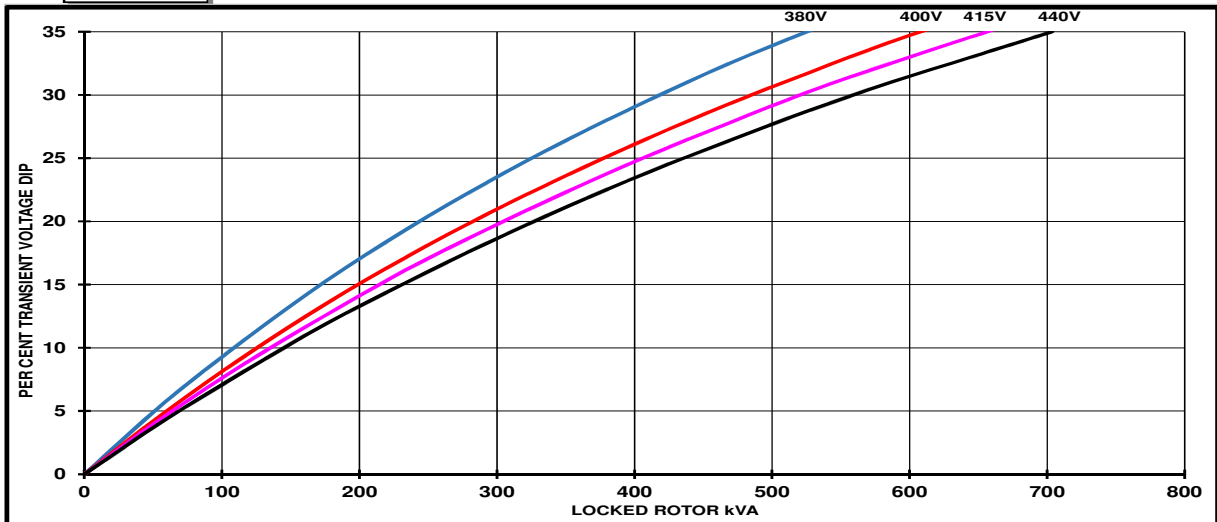

60Hz

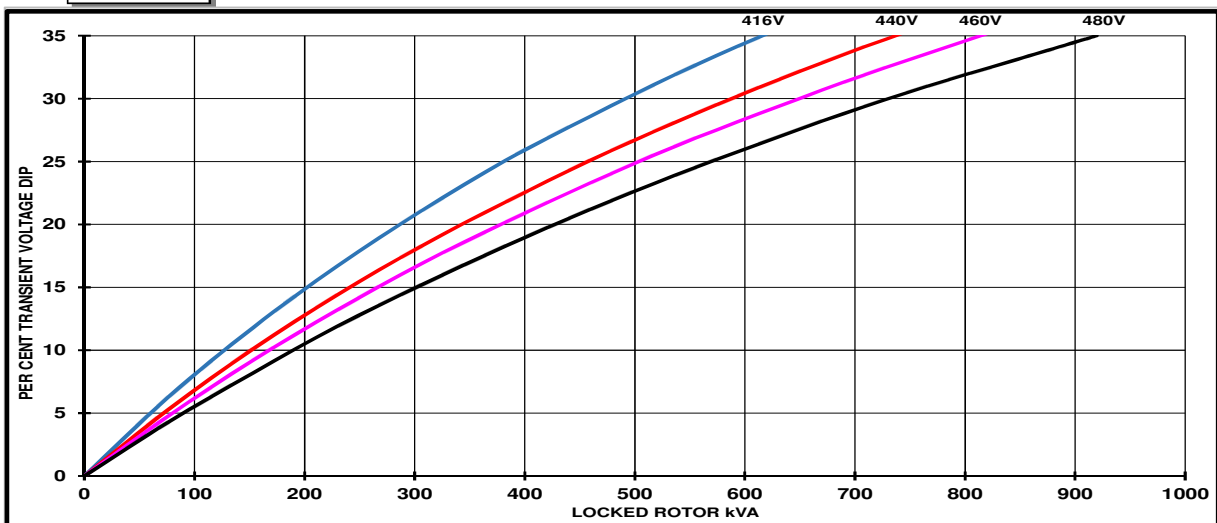


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

STAMFORD®

S4L1D-G41 Wdg.311


Three-phase Short Circuit Decrement Curve

50Hz

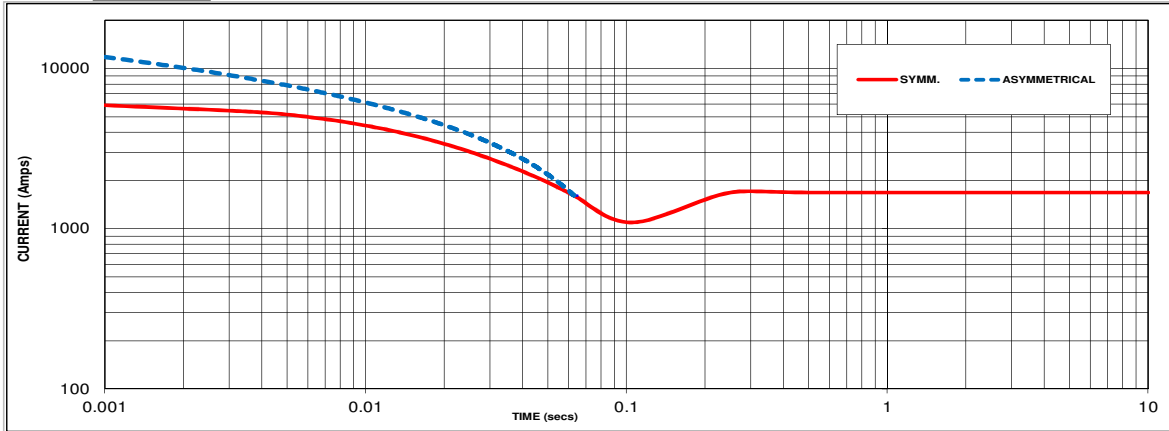

Sustained Short Circuit = 1680 Amps

60Hz

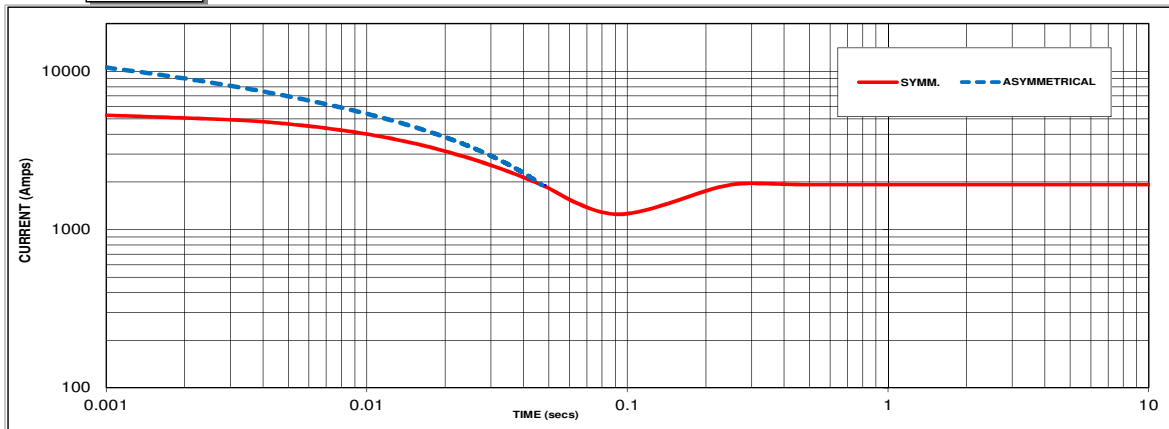

Sustained Short Circuit = 1920 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :
 Parallel Star = Curve current value X 2
 Series Delta = Curve current value X 1.732

STAMFORD


S4L1D-G41 Wdg.311

Typical Alternator Operating Charts

400V/50Hz

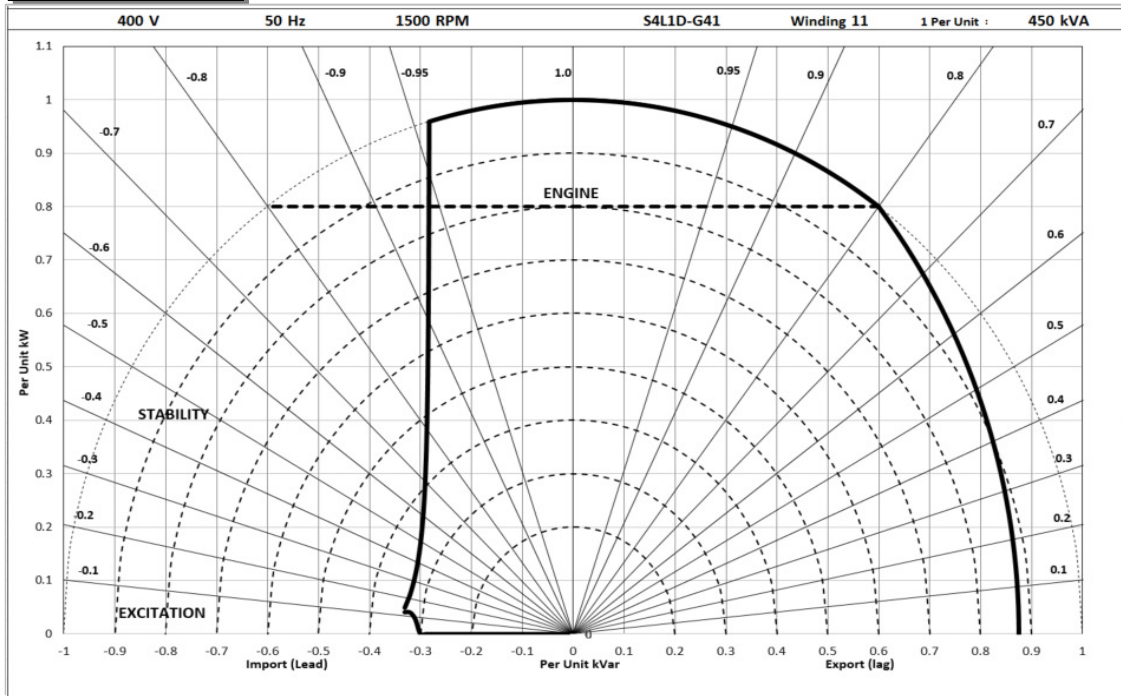

480V/60Hz

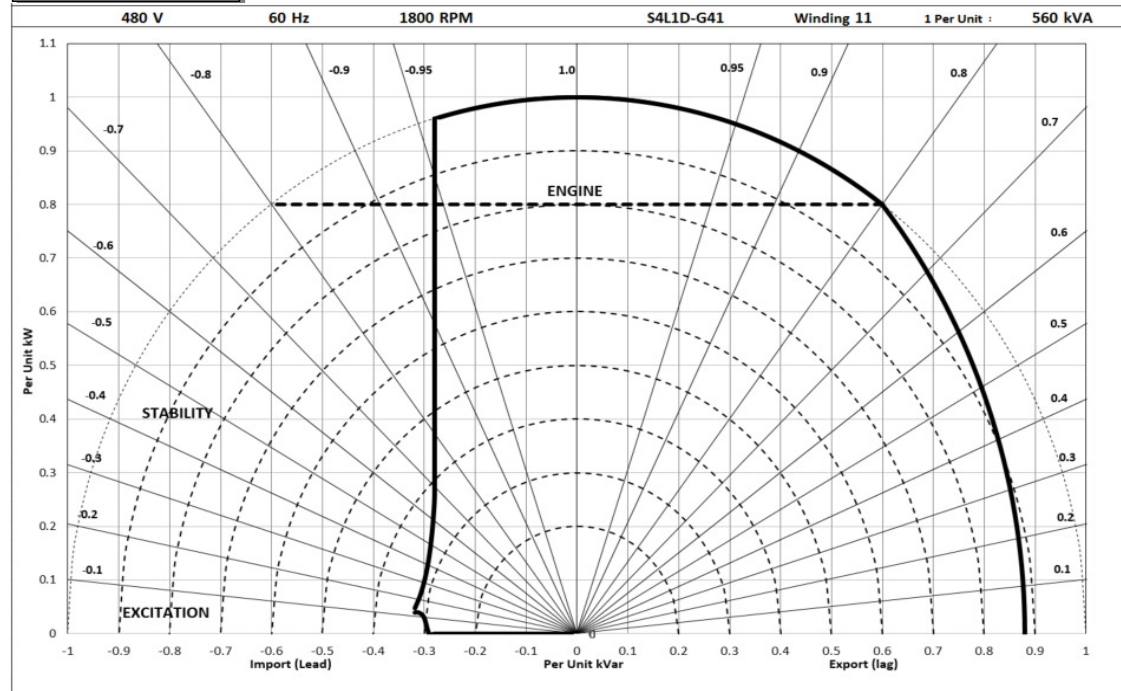

STAMFORD®

S4L1D-G41 Wdg.311

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	475	500	500	475	455	480	480	455	430	450	450	430	390	410	410	390
	kW	380	400	400	380	364	384	384	364	344	360	360	344	312	328	328	312
	Efficiency (%)	92.9	92.8	93.0	93.4	93.1	93.0	93.2	93.6	93.3	93.3	93.5	93.7	93.7	93.7	93.8	94.0
	kW Input	409	431	430	407	391	413	412	389	369	386	385	367	333	350	350	332

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	565	600	600	625	535	575	575	600	500	535	540	560	455	485	490	510
	kW	452	480	480	500	428	460	460	480	400	428	432	448	364	388	392	408
	Efficiency (%)	92.9	92.9	93.1	93.1	93.2	93.1	93.3	93.3	93.4	93.4	93.6	93.6	93.7	93.8	93.9	93.9
	kW Input	487	517	515	537	459	494	493	514	428	458	462	479	388	414	418	435

De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.




S4L1D-F41 Wdg.311 - Technical Data Sheet

Standards

Stamford industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

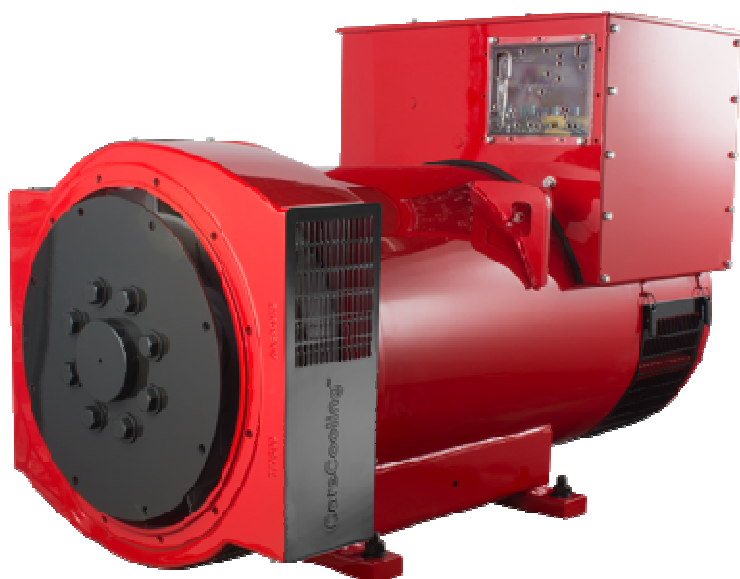

Excitation and Voltage Regulators

Excitation System					
AVR Type	AS440	MX341	MX321		
Voltage Regulation	± 1%	± 1%	± 0.5%		with 4% Engine Governing
Excitation Type	Self-Excited	PMG	PMG		

No Load Excitation Voltage (V)	10 - 8
No Load Excitation Current (A)	0.7 - 0.5
Full Load Excitation Voltage (V)	41 - 37.5
Full Load Excitation Current (A)	2.3 - 2.1
Exciter Time Constant (seconds)	0.105

STAMFORD

S4L1D-F41 Wdg.311

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Lap							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others							
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	13.7389							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Cooling Air	0.76 m ³ /sec				0.92 m ³ /sec			
Voltage Star	380	400	415	440	416	440	460	480
kVA Base Rating (Class H) for Reactance Values	400	415	415	400	455	500	500	520
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.71	2.54	2.36	2.02	3.28	3.23	2.95	2.82
X'd Dir. Axis Transient	0.18	0.17	0.16	0.13	0.18	0.18	0.16	0.16
X''d Dir. Axis Subtransient	0.13	0.13	0.12	0.10	0.13	0.13	0.12	0.11
Xq Quad. Axis Reactance	2.34	2.19	2.03	1.74	2.90	2.84	2.60	2.49
X''q Quad. Axis Subtransient	0.31	0.29	0.27	0.23	0.42	0.42	0.38	0.36
XL Stator Leakage Reactance	0.06	0.05	0.05	0.04	0.07	0.07	0.07	0.06
X2 Negative Sequence Reactance	0.22	0.21	0.20	0.17	0.29	0.29	0.26	0.25
X0 Zero Sequence Reactance	0.09	0.08	0.08	0.07	0.10	0.10	0.09	0.08
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.26	3.05	2.83	2.43	3.94	3.87	3.54	3.38
X'd Dir. Axis Transient	0.21	0.19	0.18	0.15	0.21	0.21	0.19	0.18
X''d Dir. Axis Subtransient	0.16	0.15	0.14	0.12	0.16	0.15	0.14	0.13
Xq Quad. Axis Reactance	2.41	2.26	2.10	1.80	2.98	2.93	2.68	2.56
X''q Quad. Axis Subtransient	0.37	0.35	0.32	0.28	0.51	0.50	0.46	0.44
XL Stator Leakage Reactance	0.06	0.06	0.05	0.05	0.08	0.08	0.07	0.07
Xlr Rotor Leakage Reactance	0.10	0.09	0.09	0.07	0.11	0.11	0.10	0.10
X2 Negative Sequence Reactance	0.27	0.25	0.23	0.20	0.35	0.34	0.31	0.30
X0 Zero Sequence Reactance	0.10	0.10	0.09	0.08	0.11	0.11	0.10	0.10

STAMFORD®

S4L1D-F41 Wdg.311

Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.08	
T''d SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T''q SUB-TRANSTIME CONST.	0.009	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.0073	
Rotor Winding Resistance (Rf)	1.37	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.009125	
Negative Sequence Resistance (R2)	0.010512	
Zero Sequence Resistance (R0)	0.009125	
Saturation Factors	400V	480V
SG1.0	0.36	0.38
SG1.2	1.46	1.52
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0.5, 1	N/A
Moment of Inertia	5.4292kgm ²	N/A
Weight Wound Stator	535kg	N/A
Weight Wound Rotor	463kg	N/A
Weight Complete Alternator	1160kg	N/A
Shipping weight in a Crate	1230kg	N/A
Packing Crate Size	155 x 87 x 107 (cm)	N/A
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	N/A
Bearing Non-Drive End	Ball 6314	N/A









STAMFORD®

S4L1D-F41 Wdg.311

THREE PHASE EFFICIENCY CURVES

50Hz

60Hz

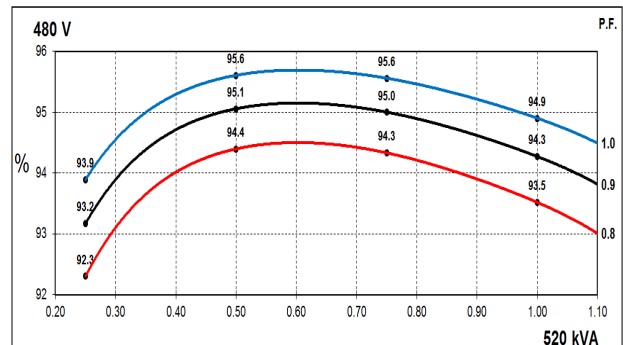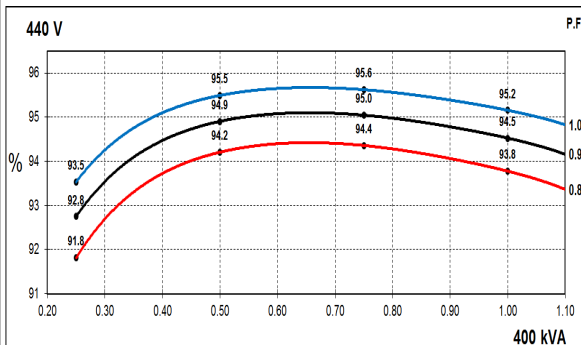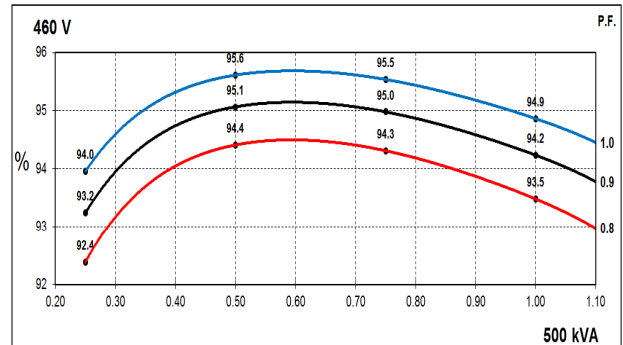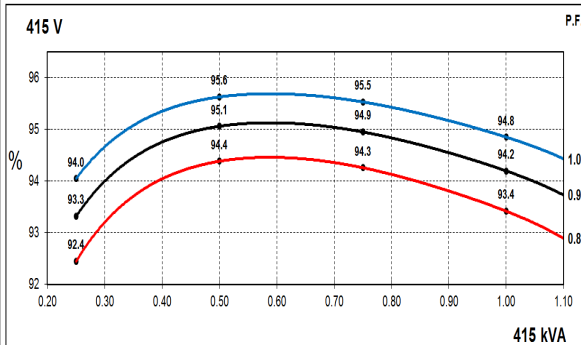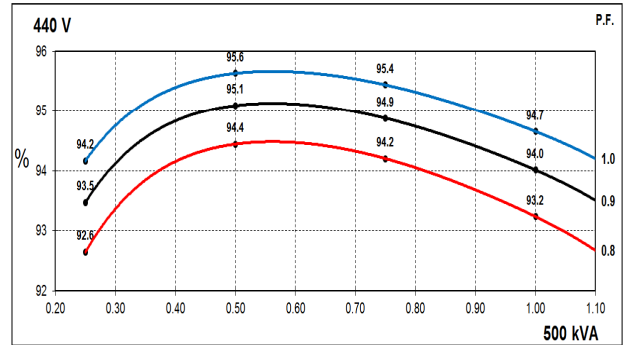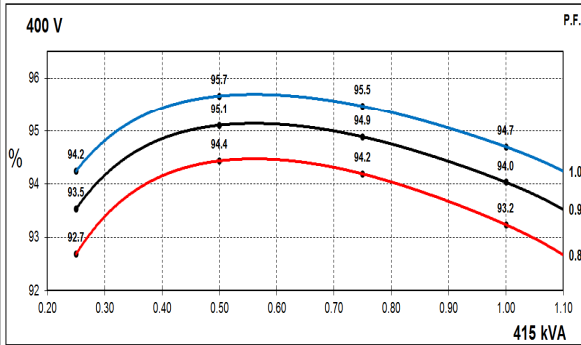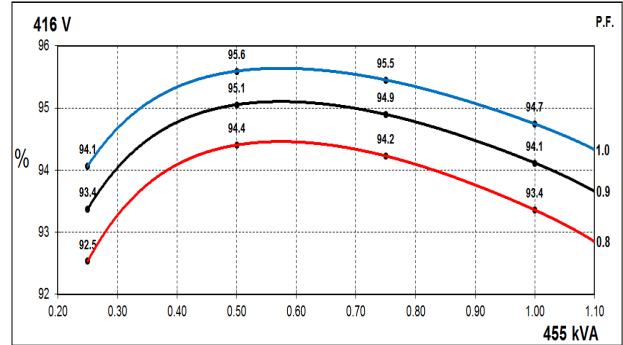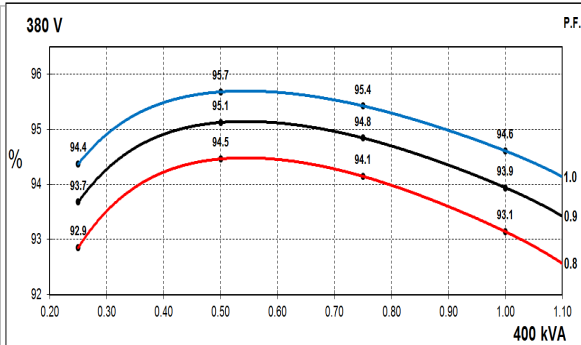


STAMFORD


S4L1D-F41 Wdg.311

Locked Rotor Motor Starting Curves - Separately Excited

50Hz

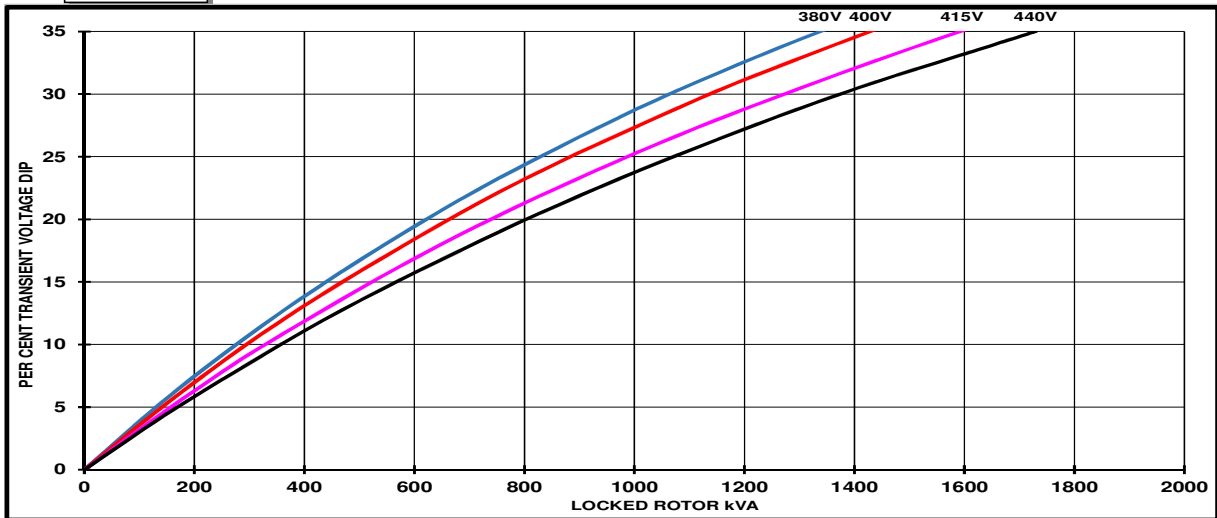

60Hz

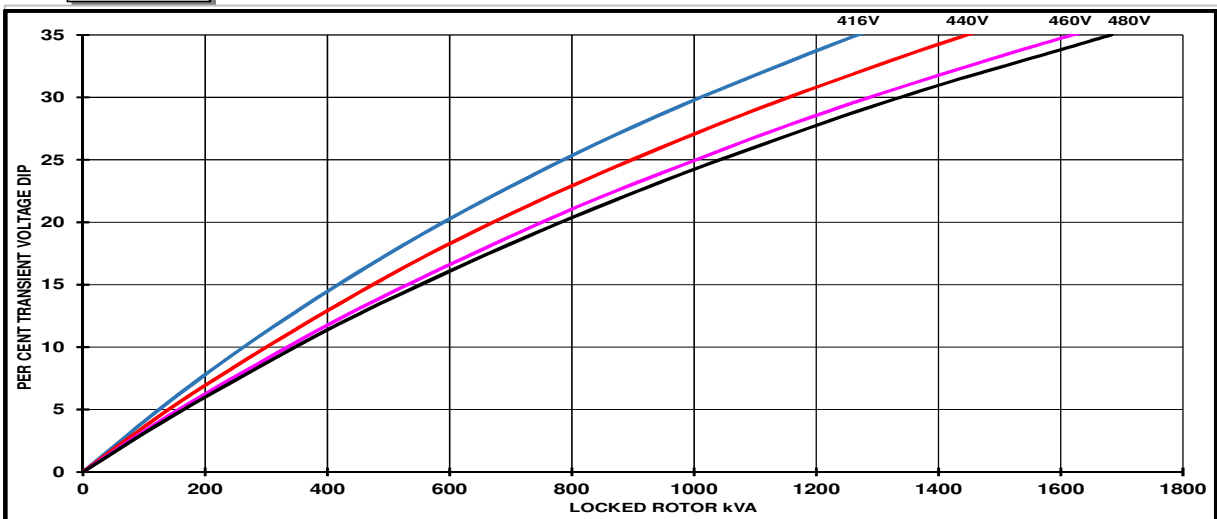


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	
< 0.5	1	For voltage rise multiply voltage dip by 1.25
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

STAMFORD


S4L1D-F41 Wdg.311

Locked Rotor Motor Starting Curves - Self Excited

50Hz

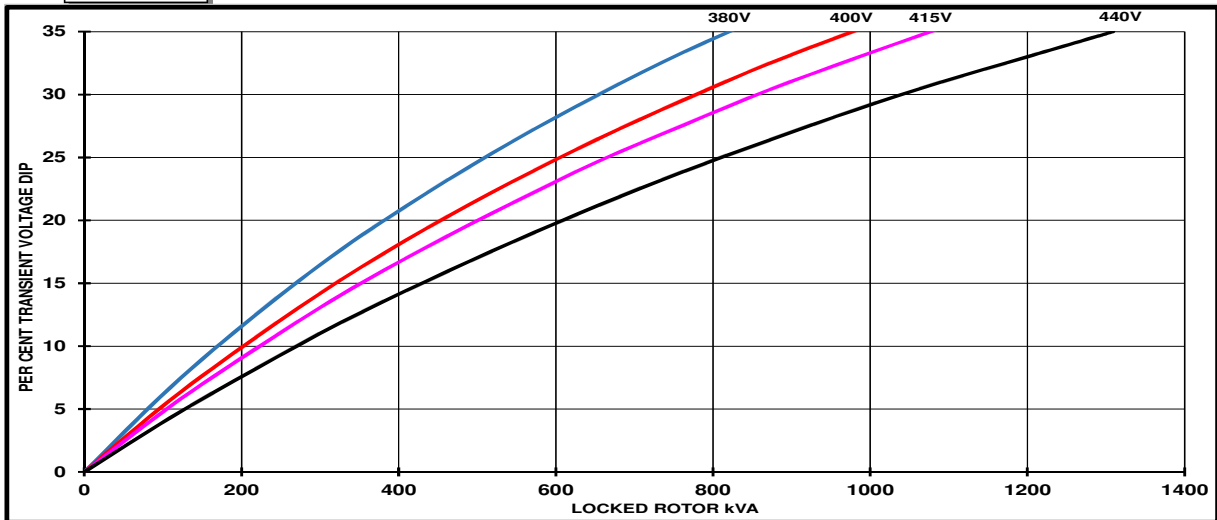

60Hz

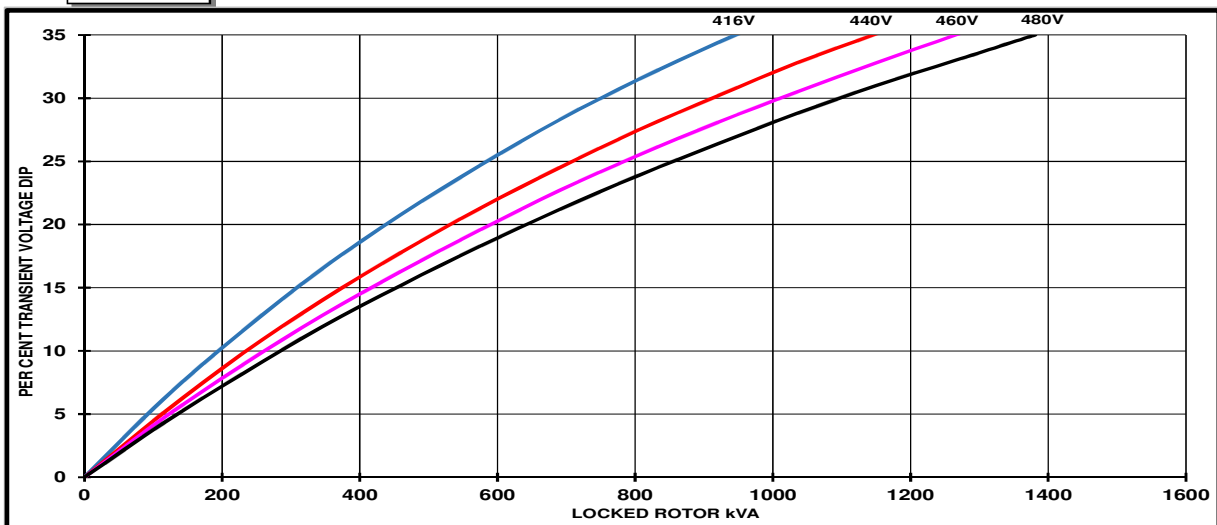


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1	
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

STAMFORD

S4L1D-F41 Wdg.311


Three-phase Short Circuit Decrement Curve

50Hz

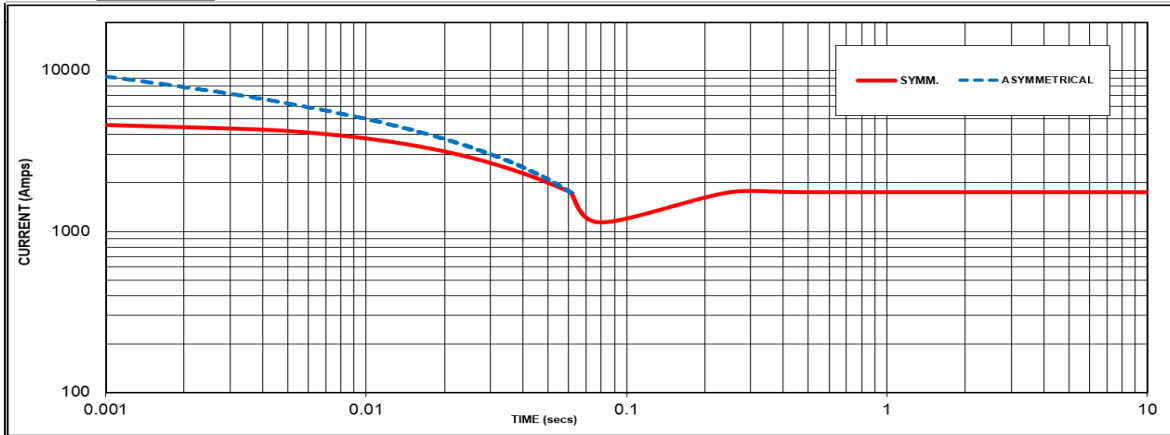

Sustained Short Circuit = 1750 Amps

60Hz

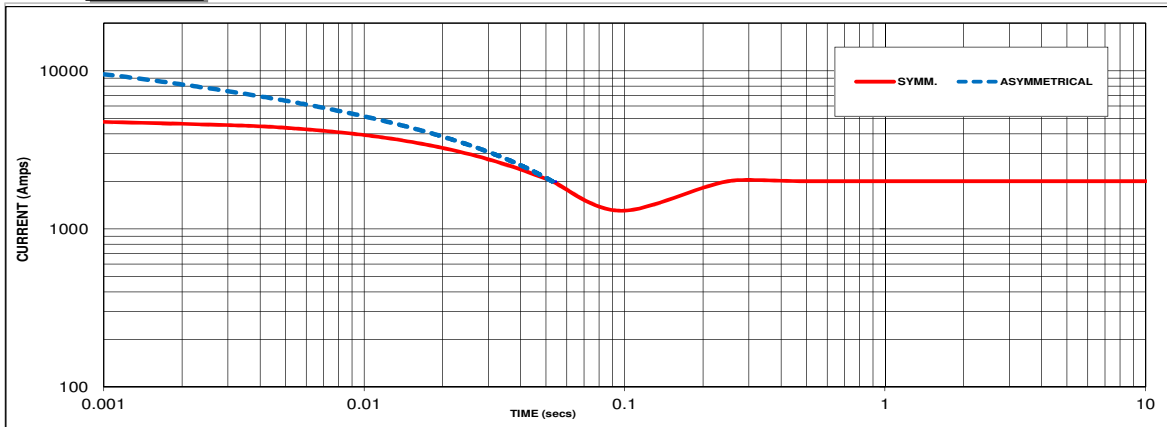

Sustained Short Circuit = 2000 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	X 1.00	416V	X 1.00
400V	X 1.05	440V	X 1.06
415V	X 1.09	460V	X 1.10
440V	X 1.16	480V	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :
 Parallel Star = Curve current value X 2
 Series Delta = Curve current value X 1.732

STAMFORD


S4L1D-F41 Wdg.311

Typical Alternator Operating Charts

400V/50Hz

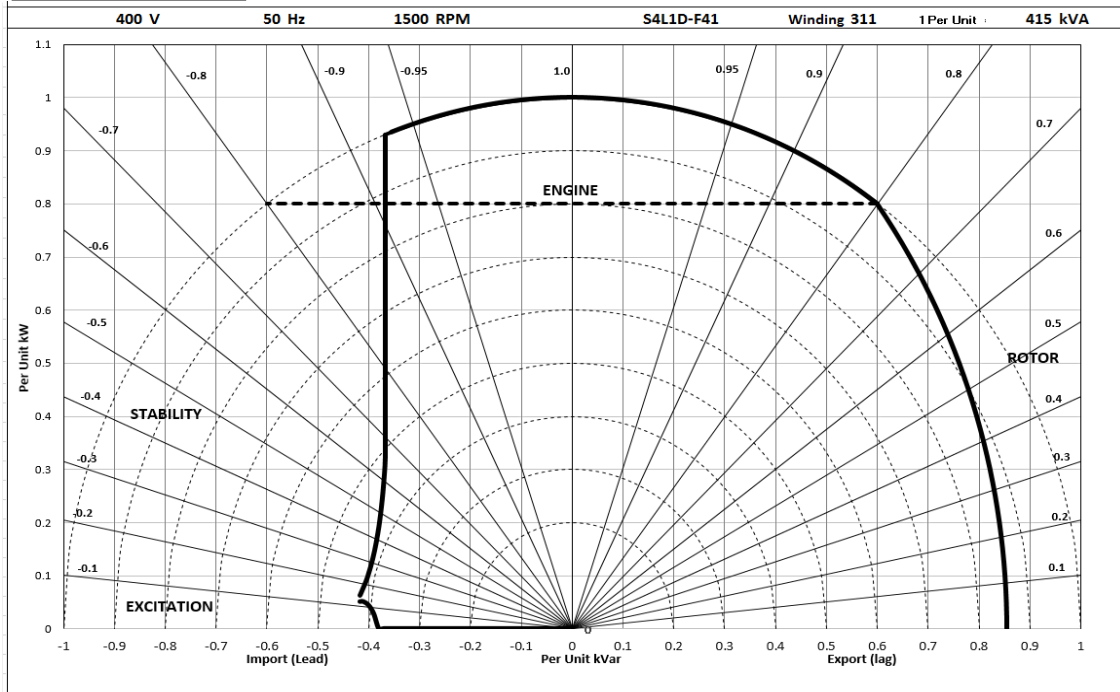

480V/60Hz

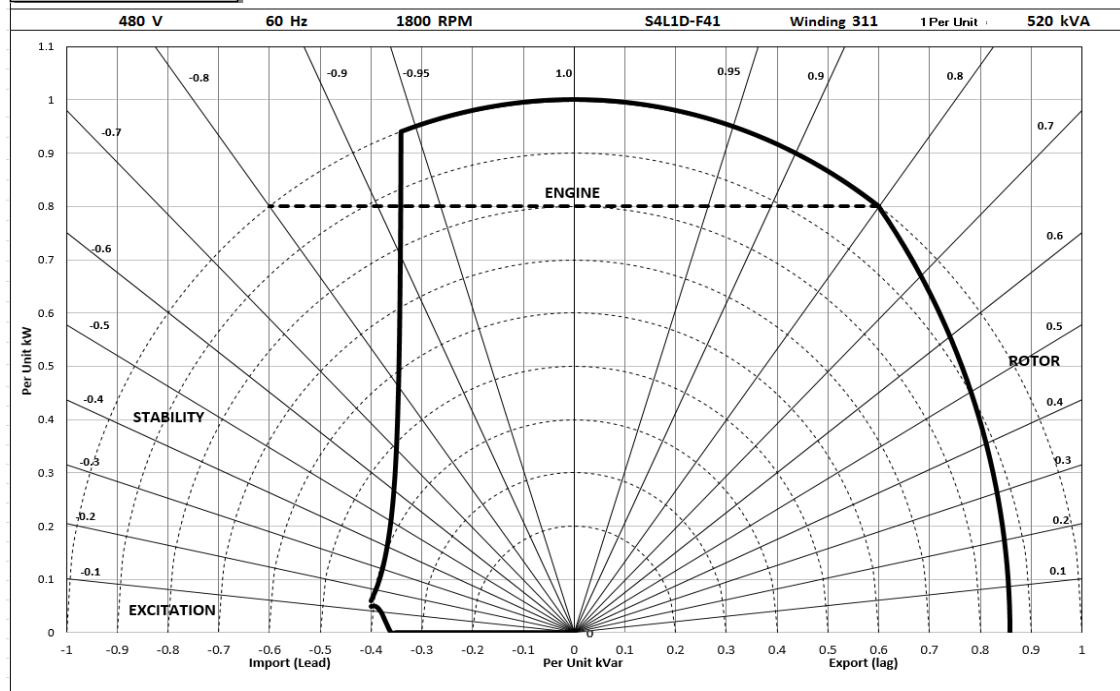

STAMFORD®

S4L1D-F41 Wdg.311

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	kVA	425	465	455	440	415	445	445	430	400	415	415	400	370	380	380	370
	kW	340	372	364	352	332	356	356	344	320	332	332	320	296	304	304	296
	Efficiency (%)	92.8	92.6	92.9	93.4	92.9	92.9	93.1	93.5	93.1	93.2	93.4	93.8	93.5	93.6	93.8	94.0
	kW Input	366	402	392	377	357	383	383	368	344	356	355	341	317	325	324	315

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	kVA	500	550	550	575	485	535	535	555	455	500	500	520	420	465	465	480
	kW	400	440	440	460	388	428	428	444	364	400	400	416	336	372	372	384
	Efficiency (%)	92.9	92.7	93.0	93.0	93.0	92.9	93.2	93.2	93.4	93.2	93.5	93.5	93.7	93.6	93.8	93.8
	kW Input	431	475	473	495	417	461	459	476	390	429	428	445	359	398	397	409

De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



STAMFORD

S4L1S-F4 Wdg.17 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of the relevant parts of the BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System					
AVR Type	AS440	MX341	MX321		
Voltage Regulation	± 1%	± 1%	± 0.5%		with 4% Engine Governing
AVR Power	Self-Excited	PMG	PMG		

No Load Excitation Voltage (V)	10 - 8
No Load Excitation Current (A)	0.6 - 0.4
Full Load Excitation Voltage (V)	41 - 37
Full Load Excitation Current (A)	2.3 - 2.1
Exciter Time Constant (seconds)	0.105

STAMFORD

S4L1S-F4 Wdg.17

Electrical Data	
Insulation System	Class H
Stator Winding	Double Layer Lap
Winding Pitch	Two Thirds
Winding Leads	12
Winding Number	17
Number of Poles	4
IP Rating	IP23
RFI Suppression	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. Refer to factory for others
Waveform Distortion	NO LOAD < 1.5% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%
Short Circuit Ratio	1/Xd
Steady State X/R Ratio	20.7392
60 Hz	
Telephone Interference	TIF<50
Cooling Air	0.99 m³/sec
Voltage Star	600
kVA Base Rating (Class H) for Reactance Values	500
Saturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	2.73
X'd Dir. Axis Transient	0.19
X''d Dir. Axis Subtransient	0.13
Xq Quad. Axis Reactance	2.40
X''q Quad. Axis Subtransient	0.36
XL Stator Leakage Reactance	0.06
X2 Negative Sequence Reactance	0.24
X0 Zero Sequence Reactance	0.08
Unsaturated Values in Per Unit at Base Ratings and Voltages	
Xd Dir. Axis Synchronous	3.28
X'd Dir. Axis Transient	0.22
X''d Dir. Axis Subtransient	0.15
Xq Quad. Axis Reactance	2.47
X''q Quad. Axis Subtransient	0.43
XL Stator Leakage Reactance	0.07
Xlr Rotor Leakage Reactance	0.09
X2 Negative Sequence Reactance	0.29
X0 Zero Sequence Reactance	0.09

STAMFORD

S4L1S-F4 Wdg.17


Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.08	
T" d SUB-TRANSTIME CONST.	0.019	
T'do O.C. FIELD TIME CONST.	1.7	
Ta ARMATURE TIME CONST.	0.018	
T" q SUB-TRANSTIME CONST.	0.0304	
Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra), per phase for series connected	0.011	
Rotor Winding Resistance (Rf)	1.37	
Exciter Stator Winding Resistance	18	
Exciter Rotor Winding Resistance per phase	0.068	
PMG Phase Resistance (Rpmg) per phase	1.9	
Positive Sequence Resistance (R1)	0.01375	
Negative Sequence Resistance (R2)	0.01584	
Zero Sequence Resistance (R0)	0.01375	
Saturation Factors		
	600V	
SG1.0	0.3	
SG1.2	1.45	
Mechanical Data		
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.	
	1 Bearing	2 Bearings
SAE Adaptor	SAE 0, 0.5, 1, 2, 3	SAE 0, 0.5, 1, 2
Moment of Inertia	5.4292 kgm ²	5.2304 kgm ²
Weight Wound Stator	535 kg	535 kg
Weight Wound Rotor	463 kg	440 kg
Weight Complete Alternator	1160 kg	1160 kg
Shipping weight in a Crate	1230 kg	1230 kg
Packing Crate Size	155 x 87 x 107 (cm)	155 x 87 x 107 (cm)
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	Ball 6317
Bearing Non-Drive End	Ball 6314	Ball 6314

STAMFORD®

S4L1S-F4 Wdg.17

THREE PHASE EFFICIENCY CURVES

60Hz

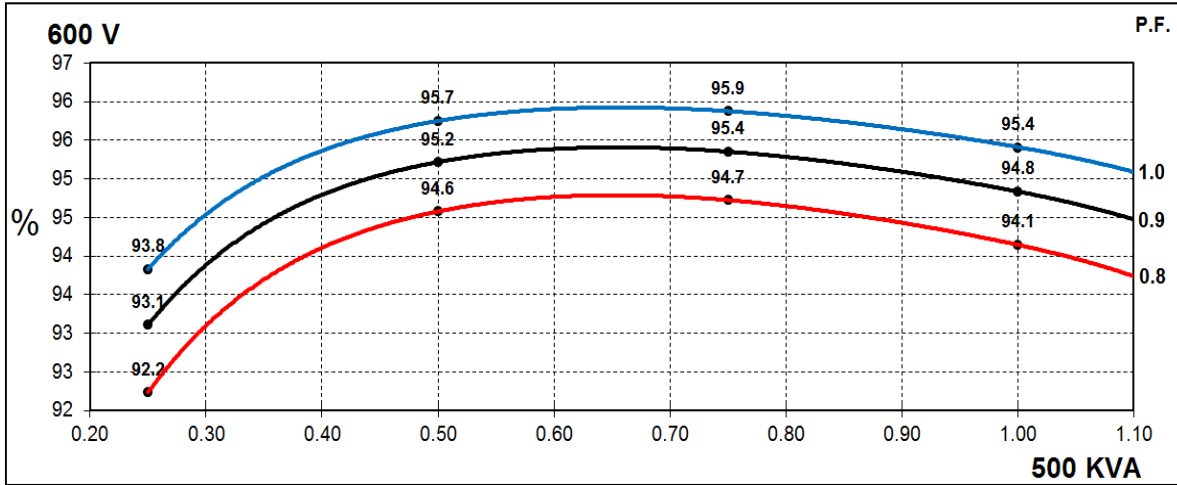


STAMFORD


S4L1S-F4 Wdg.17

Locked Rotor Motor Starting Curves - Separately Excited

60Hz

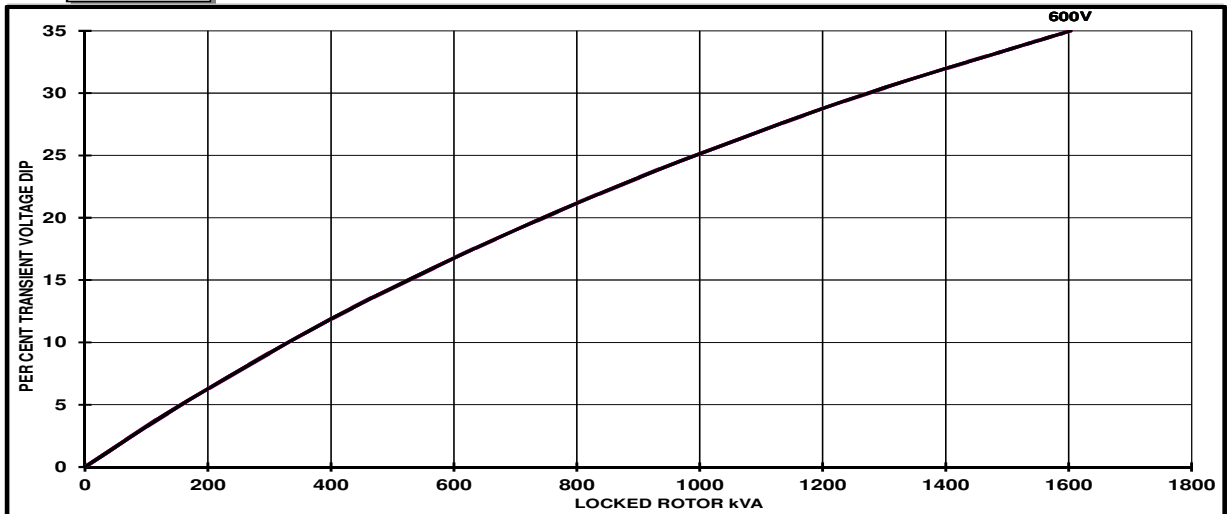

Locked Rotor Motor Starting Curves - Self Excited

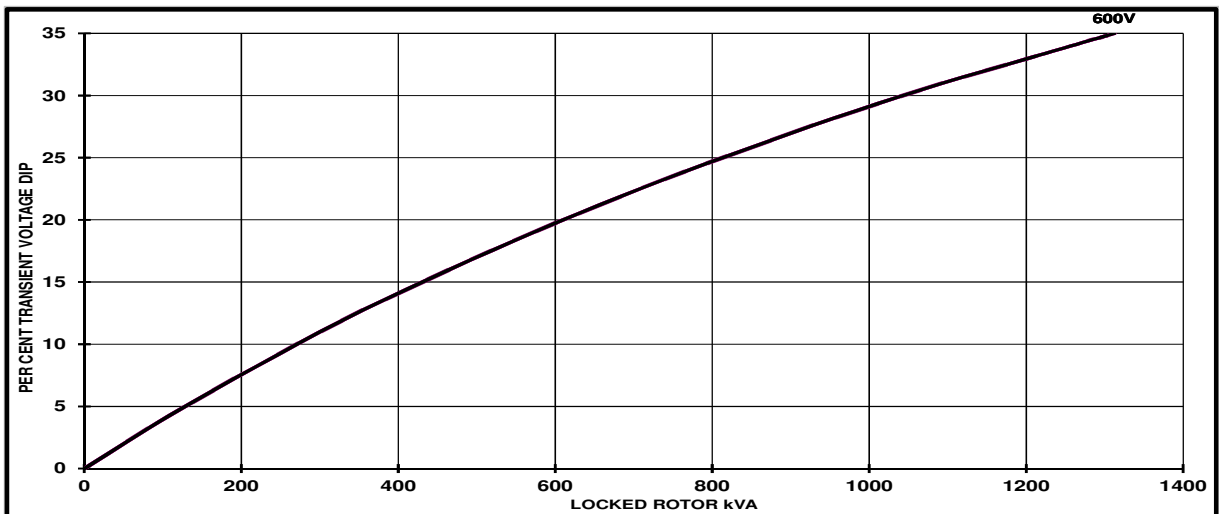


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1	
0.5	0.97	
0.6	0.93	
0.7	0.9	
0.8	0.85	
0.9	0.83	

STAMFORD

S4L1S-F4 Wdg.17

Three-phase Short Circuit Decrement Curve

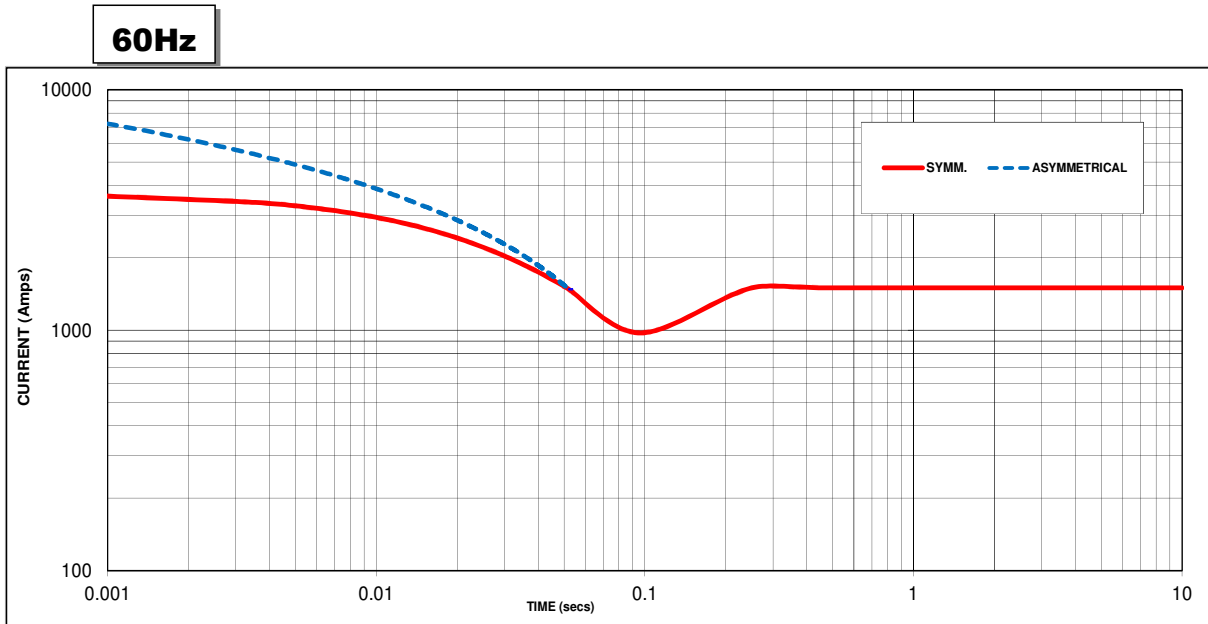

Sustained Short Circuit = 1500 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

Voltage	Factor
600V	X 1.00

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged


Note 3

Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :
 Parallel Star = Curve current value X 2
 Series Delta = Curve current value X 1.732

STAMFORD

S4L1S-F4 Wdg.17

Typical Alternator Operating Charts

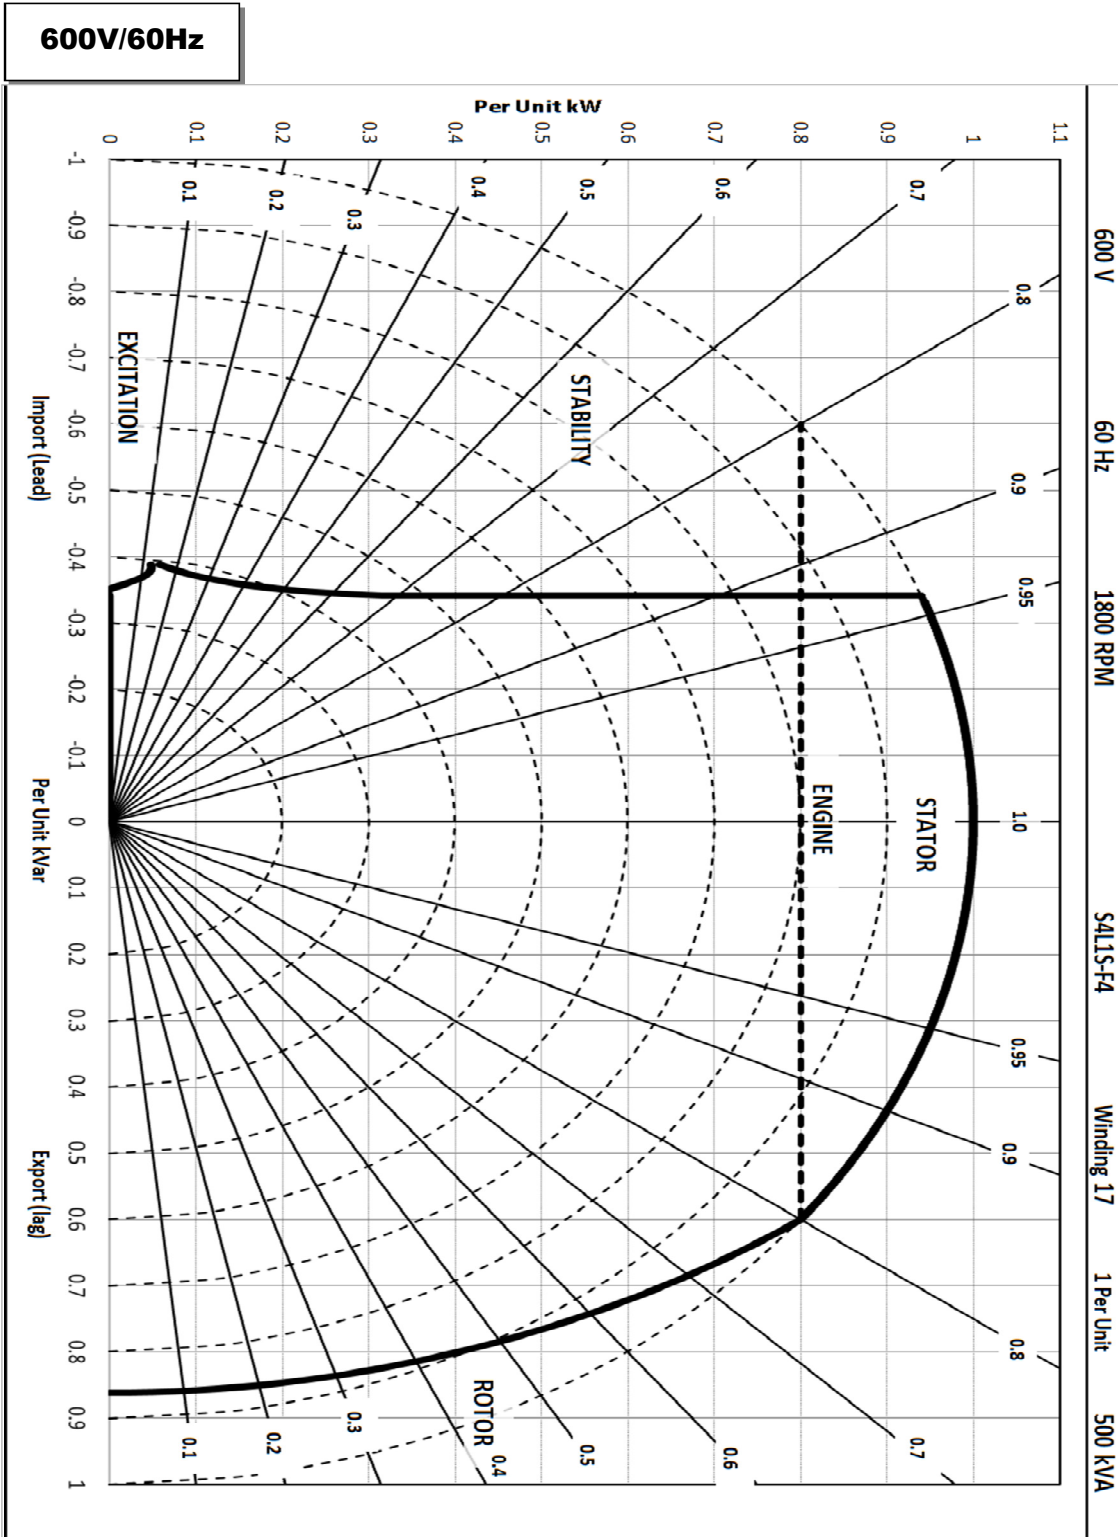

STAMFORD®

S4L1S-F4 Wdg.17

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C	Standby - 150/40°C	Cont. H - 125/40°C	Cont. F - 105/40°C
60 Hz	Series Star (V)	600	600	600	600
	kVA	550	535	500	465
	kW	440	428	400	372
	Efficiency (%)	93.8	93.9	94.1	94.4
	kW Input	469	456	425	394

De-Rates

All values tabulated above are subject to the following reductions:

- 5% when air inlet filters are fitted
- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.
Cummins and the Cummins logo are registered trade marks of Cummins Inc.
STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.





A highly advanced integrated genset control system, this device provides genset control, transfer switch control, metering, protection, and programmable logic in a simple, easy-to-use, reliable, rugged, and cost effective package.

FEATURES

- Generator metering (includes three-phase mains)
- Engine and generator protection: 27, 32R, 40Q, 59, 810/U
- Optional enhanced generator protection: 47, 51, 78, and 81ROCOF
- Load sharing and generator sequencing (via LSM-200 Load Share Module)
- Var sharing over Ethernet (via LSM-200)
- BESTCOMSP^{Plus}® Software
 - Programming and setup
 - Intuitive and powerful
 - Remote control and monitoring
 - Programmable logic
 - USB communications
- Automatic transfer switch control
- Automatic synchronizer (optional)
- Exercise timer
- SAE J1939 engine ECU communications
- Automatic generator configuration detection
- Expandable functionality via add-on modules
 - [LSM-200 Load Share Module](#)
 - [CEM-200 Contact Expansion Module](#)
 - [AEM-200 Analog Expansion Module](#)
- Multilingual capability
- Remote communications to Basler's RDP-110 (remote display panel)
- Sixteen programmable contact inputs
- Up to 15 contact outputs: 3 contacts rated for 30 Adc and up to 12 programmable contacts rated for 2 Adc

BENEFITS

- Provides integrated engine-genset control, protection, and metering in a single package.
- The Offline Simulator, provided in BESTlogic™ Plus, helps test and troubleshoot logic without the need for expensive hardware.
- Flexible programmable logic and programmable I/O make it easy to expand the DGC-200's inputs and outputs with the CEM-200 (Contact Expansion Module) and the AEM-200 (Analog Expansion Module). This saves time and money by eliminating unnecessary external PLCs and control relaying.

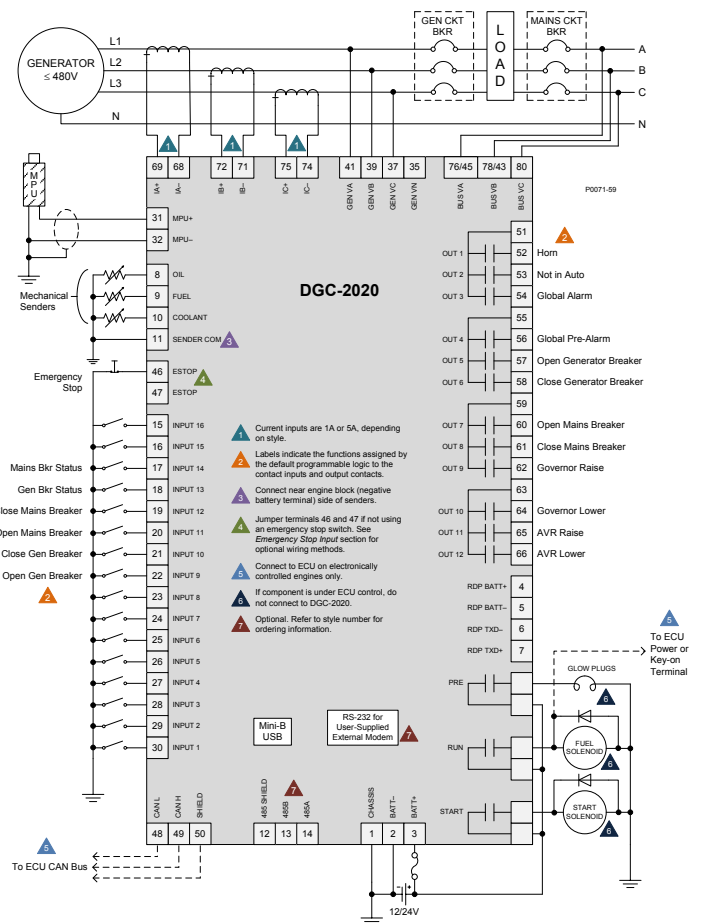


Figure 1 - DGC-200 Connection Diagram for a Typical Application

Visit [WWW.BASLER.COM](http://www.basler.com)
FOR ADDITIONAL INFORMATION.

SPECIFICATIONS

Power Supply

Nominal: 12 or 24 Vdc
 Range: 6 to 32 Vdc
 Battery Ride Through: Starting at 10 Vdc, withstands cranking ride-through down to 0 V for 50 ms

Power Consumption

Sleep Mode: 5 W
 Normal Operational Mode: 7.9 W
 Maximum: 14.2 W

Current Sensing

1 A Sensing: 0.02 to 1.0 Aac, continuous
 2 Aac for 1 second
 5 A Sensing: 0.1 to 5.0 Aac, continuous
 10 Aac for 1 second
 Burden: 1 VA

Voltage Sensing

Range: 12 to 576 Vrms L-L
 Frequency Range: 10 to 72 Hz for 50/60 Hz style,
 10 to 480 Hz for 400 Hz style
 Burden: 1 VA
 One-second Rating: 720 Vrms

Contact Sensing

Contact Inputs (16): Accepts normally open (N.O.), Dry Contacts, programmable
 Emergency Stop: Normally closed (N.C.), Dry Contact

Engine Speed Sensing

Magnetic Pickup:
 Voltage Range: 6 to 70 Vpp
 Frequency Range: 32 to 10,000 Hz
 Generator Frequency:
 Generator Voltage Range: 12 to 576 Vrms
 Via ECU over J1939

Resistive Senders

Fuel Level Sender: 0 to 250 Ω nominal
 Coolant Temp Sender: 10 to 2,750 Ω nominal
 Oil Pressure Sender: 0 to 250 Ω nominal

Output Contacts

Fuel Solenoid, Engine Crank,
 Pre-Start Relays Rating: 30 Adc at 28 Vdc-make, break, and carry
 Programmable Relays: Up to 12
 Rating: 2 Adc at 28 Vdc-make, break, and carry

Protection

Generator: 27, 32R, 40Q, 59, 810/U (standard)
 47, 51, 78, 81 ROCOF (optional)
 Engine: Oil pressure, coolant temperature, overcrank, ECU-specific elements, and diagnostic reporting.

Agency Approvals

CSA certified, NFPA compliant, CE compliant,
 UL recognized (Hazardous Location certification available upon request), EAC certified

Communication

USB Port: USB 2.0, Mini-B jack
 RS-485 (optional): 9600 baud, 8 data bits, no parity
 RDP-110 (optional): 4,000 ft (1,219 m) max wire length, 20 AWG (0.52 mm²) min wire size
 Modem (optional): DB-9 connector (male)
 CAN bus: 250 kb/s communication rate, 1.5 to 3 Vdc differential bus

Environmental


Operating Temp: -40°C to 70°C (-40°F to 158°F)
 Storage Temp: -40°C to 85°C (-40°F to 185°F)
 Humidity: IEC 68-2-38
 Salt Fog: ASTM B 17-73, IEC 68-2-11
 Ingress Protection: IEC IP54 for front panel
 Shock: 15 G in three perpendicular planes
 Vibration:
 5 to 29 Hz: 1.5 G peak
 29 to 52 Hz: 0.036" (0.914 mm) double amplitude
 52 to 500 Hz: 5 G peak

Physical

Weight: 4.4 lb (2 kg)
 Dimensions (WxHxD): 11.77 x 8.27 x 2.69 inches (299 x 210 x 69 mm)

For complete specifications, download the instruction manual at www.basler.com.

STYLE CHART

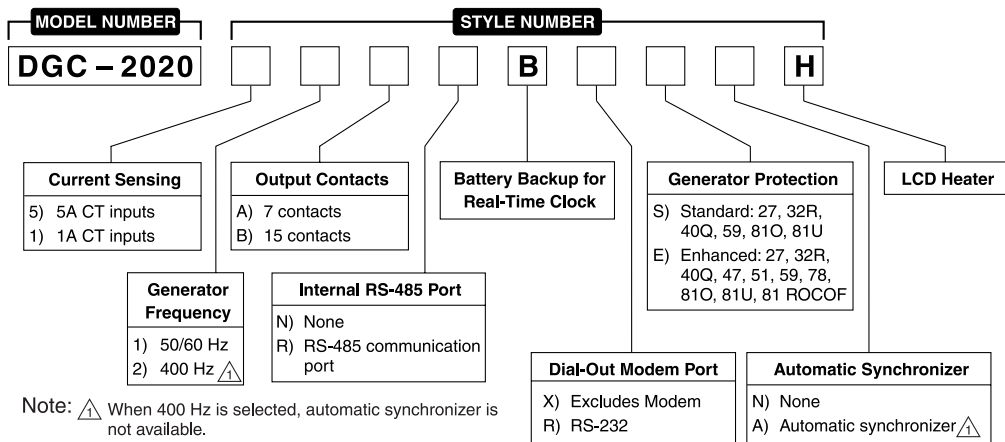

RELATED PRODUCTS

- [BE1-11g Generator Protection System](#)
 - A complete generator protection system.
- [DECS-250 Digital Excitation Control System](#)
 - Total control in a compact package provides precise voltage, var and power factor regulation, exceptional system response, and generator protection.

ACCESSORIES

- [AEM-2020 Analog Expansion Module](#)
 - Easily increases the functionality by seamlessly adding analog inputs and outputs.
- [CEM-2020, CEM-2020H Contact Expansion Module](#)
 - Each module adds 10 inputs and up to 24 outputs that are easily programmed through BESTCOMSPUs[®] for easy integration into the system.
- [LSM-2020 Load Share Module](#)
 - The simple-to-use LSM-2020 easily adds paralleling capabilities with little effort and expense.
- [RDP-110 Remote Display Panel](#)
 - Provides remote alarm and pre-alarm indication and annunciation of system status, easily meeting the annunciation requirements of NFPA-110 applications.



12570 State Route 143, Highland, Illinois 62249-1074 USA
 Tel +1 618.654.2341 Fax +1 618.654.2351
 email: info@basler.com www.basler.com

P.A.E. Les Pins, 67319 Wasselonne Cedex, FRANCE
 Tel +33 3.88.87.1010 Fax +33 3.88.87.0808
 e-mail: franceinfo@basler.com

No. 59 Heshun Road Loufeng District (N),
 Suzhou Industrial Park, 215122, Suzhou, P.R.China
 Tel +86(0)512.8227.2888 Fax +86(0)512.8227.2887
 e-mail: chinainfo@basler.com

111 North Bridge Road #15-06 Peninsula Plaza
 Singapore 179098
 Tel +65 68.44.6445 Fax +65 68.44.8902
 e-mail: singaporeinfo@basler.com

Annex to the
technical catalog



Tmax T8

Low voltage molded case
circuit breaker up to 3000 A

UL 489 and CSA C22.2 Standard

1SDC210026D0201 – 2008 Edition



ABB

Main characteristics

The Tmax family, conforming to the UL 489 and CSA C22.2 No. 5.1 Standards, is enriched with the Tmax T8 size, which allows 3000 A to be reached. Also available in the 1600 A, 2000 A and 2500 A frames, Tmax T8 is equipped with the same electronic trip units as Tmax T7, thereby guaranteeing extremely high performances able to satisfy all installation requirements. Adequately sized for the performances offered (W=16.8 / D=11.2 / H=15.0 in). Tmax T8 is able to interrupt the following short-circuit currents: 125 kA@480 V and 100 kA@600 V.



Main characteristics

General characteristics

The Tmax T8 size has both circuit breakers and molded case switches (MCS). The following tables show the main characteristics of these ranges.

Circuit breakers for power distribution

			Tmax T8
Frame size	[A]		1600/2000/2500/3000
Number of poles	[No]		3/4
Rated voltage	(AC) 50-60 Hz	[V]	600
	(DC)	[V]	–
Test voltage (1 min) 50-60 Hz		[V]	3000
Interrupting ratings		[kA rms]	V
	240 V AC	[kA rms]	125
	480 V AC	[kA rms]	125
	600 V AC	[kA rms]	100
Trip units	Electronic	PR232/P-T8	■
		PR331/P	■
		PR332/P	■
Dimensions fixed version (3p)	H	[in-mm]	15.0 - 382
	W	[in-mm]	16.8 - 427
	D	[in-mm]	11.2 - 282
Mechanical life		[operations]	15000
Weight (fixed 3p)	1600/2000/2500 A	[lbs]	161
	3000 A	[lbs]	236

Molded case switches (MCS)

The Tmax T8 MCS are derived from the corresponding circuit breakers, of which they keep the overall dimensions, the versions, the fixing systems and the possibility of mounting accessories unchanged. This version only differs from the circuit breakers in the absence of the protection trip units. All molded case switches comply with the UL 489 and CSA C22.2 Standards and are self-protected.

			Tmax T8V-D
Rating	[A]		2000/2500/3000
Poles	[No]		3/4
Magnetic override		[A]	40000
Rated voltage	AC (50-60 Hz)	[V]	600
	DC	[V]	–

Tmax-Molded Case Circuit Breakers

T7 1200A Frame

AC Circuit Breakers and Switches

3 and 4 Pole

Motor Circuit Protectors

Higher Performances in Less Space

Field Installable Accessories and Trip Units



Dimensions 3P Fixed Version 10.55H x 8.26W x 6.06D

Weight 21.4 (lbs)

Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

– “Low Voltage Directives” (LVD) no. 73/23 EEC

– “Electromagnetic Compatibility Directive” (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

Interrupting ratings (RMS sym. kAmps)		T7		
Continuous Current Rating		1200		
Number of Poles		3-4		
		S	H	L
AC				
	240V	65	100	150
	480V	50	65	100
	600V	25	50	65



Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

Mounting

Fixed
Drawout

Connections

Busbar connection or compression lugs
Pressure-type terminals for bare cables
Rear connections

Trip Unit

PR231/P, PR232/P, PR331DS, and PR332DS/P electronic trip unit

Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Padlock provision - PLL
- Direct rotary handle - RHD
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Rear orientated terminal - R
- Phase separators
- Residual current relay (IEC Only)



ABB Inc.

1206 Hatton Road
Wichita Falls, TX 76302
For more information and
the location of your local
field office please go to
www.abb-control.com

Tmax-Molded Case Circuit Breakers

T5 400A and 600A Frame

AC Circuit Breakers and Switches

DC Circuit Breakers and Switches (400A Only)

3 and 4 Pole

Motor Circuit Protectors

Higher Performances in Less Space

Field Installable Accessories and Trip Units



Dimensions 3P Fixed Version 8.07H x 5.51W x 4.07D

Compliance with Standards

UL 489

CSA C22.2 No.5.1

IEC 60947-2

Standards

EC directive:

- "Low Voltage Directives" (LVD) no. 73/23 EEC

- "Electromagnetic Compatibility Directive" (EMC) no.89/336 EEC

The ABB Quality System complies with the international ISO 9001 - 2000 Standard (model for quality assurance in design, development, construction, and installation and service) and with the equivalent European EN ISO 9001 and Italian UNI EN ISO 9001 Standards

Interrupting ratings (RMS sym. kAmps)

T5

Continuous Current Rating

400-600A

Number of Poles

3-4

		N S H L V				
AC						
240V		65	100	150	200	200
480V		25	35	65	100	150
600V		18	25	35	65	100
DC* (400 A only)						
500V	2 poles in series	25	35	50	65	100
600V	3 poles in series	16	25	35	50	65

*Thermo Magnetic Trip Only



Company Quality Systems and Environmental Systems

The new Tmax series has a hologram on the front, obtained using special anti-imitation techniques, which guarantees the quality and that the circuit breaker is an original ABB product.

Attention to protection of the environment and to health and safety in the work place is another priority commitment for ABB and, as confirmation of this, the company environmental management system has been certified by RINA in 1997, in conformity with the international ISO 14001 Standard. This certification has been integrated in 1999 with the Management System for Health and Safety in the workplace, according to OHSAS 18001 (British Standards), obtaining one of the first certification of integrated management System, QES (Quality, Environment,

Safety) issued by RINA. ABB - the first industry in the electro-mechanical section in Italy to obtain this recognition - thanks to a revision of the production process with an eye to ecology has been able to reduce the consumption of raw materials and waste from processing by 20%. ABB's commitment to safeguarding the environment is also shown in a concrete way by the Life Cycle Assessments of its products carried out directly by the ABB Research and Development in collaboration with the ABB Research Center. Selection of materials, processes and packing materials is made optimizing the true environmental impact of the product, also foreseeing the possibility of its being recycled.

Mounting

Fixed
Plug-in
Drawout

Connections

Busbar connection or compression lugs
Pressure-type terminals for bare cables
Rear connections

Trip Unit

TMA thermo magnetic trip units, with adjustable thermal threshold ($I_1 = 0.7 \dots 1 \times I_n$) and adjustable magnetic threshold ($I_3 = 5 \dots 10 \times I_n$).

PR221DS, PR222DS/P and PR222DS/PD-A electronic trip unit

Weight (lbs)	8.55
---------------------	------

Auxiliary Devices for Indication and Control

- Auxiliary contacts - AUX
- Undervoltage release - UVR
- Shunt trip - SOR
- Terminal covers
- Front for lever operating mechanism - FLD
- Direct rotary handle - RHD
- Stored energy motor operator - MOE
- Key lock - KLF
- Early auxiliary contact - AUE
- Transmitted rotary handle - RHE
- Front terminal for copper cable - FC Cu
- Front extended terminal - EF
- Front terminal for copper-aluminum - FC CuAl
- Front extended spread terminal - ES
- Distribution lugs
- Rear orientated terminal - R
- Phase separators
- Residual current release (IEC Only)



ABB Inc.

1206 Hatton Road
Wichita Falls, TX 76302
For more information and
the location of your local
field office please go to
www.abb-control.com

Digital Linear Chargers

On-Board Chargers Today

- Current Supplier provides quality product and design services. However, services are at their pacing with limited resources; and a history of issues meeting launch dates. PC charger delays prompted a re-evaluation of our controls and processes
- Resulted in a renewed commitment to the charger category
 - Allow supplier to focus on what they do well... build product
 - All charger development controlled by Minn Kota engineering
- Minn Kota designs, tests, and qualifies
- Supplier manufactures – period
- Revised product plan
 - 2011 Digital Linear On-board chargers
 - 2012 Precision Charge On-board chargers

New Digital Linear On-Board Chargers

- Taking existing Linear On-board family of chargers and raising the bar
 - Analog to Digital designs; New “D” designation in model name



Digital Linear Chargers

New Digital Linear On-Board Chargers (cont.)

- New microprocessor controlled linear design provides software enriched features and functionality
 - More repeatable set points (voltage limit and current) = improved charge curves
 - Maintenance mode time-out feature (auto-off)
 - Arc protection
 - Enhanced status codes
 - System okay
 - Charge stage indication (Bulk, Absorption, or Maintenance)
 - Full charge
 - Maintenance mode status
 - Multiple specific error indications – low battery voltage, damaged temp sensor, no output lead attached, etc.
- Up to 2X Faster Charge Times in high heat conditions

LED Status Code Detail

1. A GREEN power light is lit to indicate AC power is applied
2. A YELLOW light is lit for each bank to indicate the battery is charging in the Bulk Mode
3. A flashing YELLOW light is lit for each bank to indicate the battery is charging in the Absorption Mode
4. A flashing GREEN light is lit for each bank to indicate the battery is in maintenance mode and ready to use
5. A GREEN light is lit for each bank to indicate the battery is in long term maintenance mode and ready to use
6. A RED light for each bank is lit if any of the following apply:
 - a) No battery is connected to an output cord - this may also indicate a blown fuse in the fuse holder
 - b) The battery is connected reverse polarity
 - c) A short circuit
 - d) The battery voltage is below 4 volts - the bank will not charge a battery in this condition

Digital Linear Chargers


LED Status Code Detail (cont.)

- e) The battery voltage is above 18 volts - the bank will not charge a battery in this condition
7. A flashing RED light is lit for each bank if there is a damaged temperature sensor on the output cord - the bank will not operate if this occurs.
8. Flashing RED and GREEN lights are lit for each bank if any of the following apply:
 - a) The battery voltage does not rise above 10.5V after 3 hours - the battery may be damaged and will not be charged
 - b) Charging in Bulk Mode exceeds 20 hours - the battery may be damaged and will not be charged

Digital Linear Charging Technologies

Automatic 3-Stage Charging

- Bulk – high amps at low voltage until battery reaches ~75% charge
- Absorption – at ~75% charge, current tapers down until the battery voltage reaches 14.4V* (full charge)
- Maintenance (or Float) – when the battery voltage reaches full charge, charger output is dropped to 13.4V* (.1A-.3A). After 24 hours, the charger automatically turns off and automatically turns on when the battery voltage drops below 12.6 volts

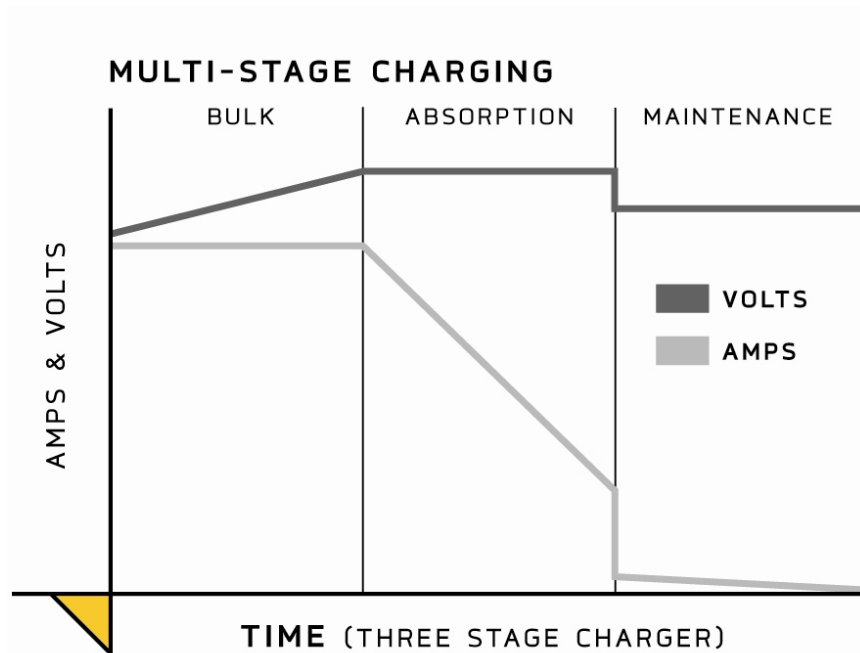

* At 77 degrees Fahrenheit

Digital Linear Chargers

Digital Linear Charging Technologies (cont.)

Automatic Temperature Compensation


- Senses temperature and adjusts output voltage
- Protects batteries from overcharging at high temperatures
- Maintains gassing threshold for a full charge

Gassing Threshold

- Voltage level at which electrolyte begins moving within the battery
- This threshold must be reached in order to fully charge a battery

Effect of Temperature

- Gassing threshold is higher at lower temps, lower at higher temps
- Too much voltage at high temperatures can “boil” and destroy a battery

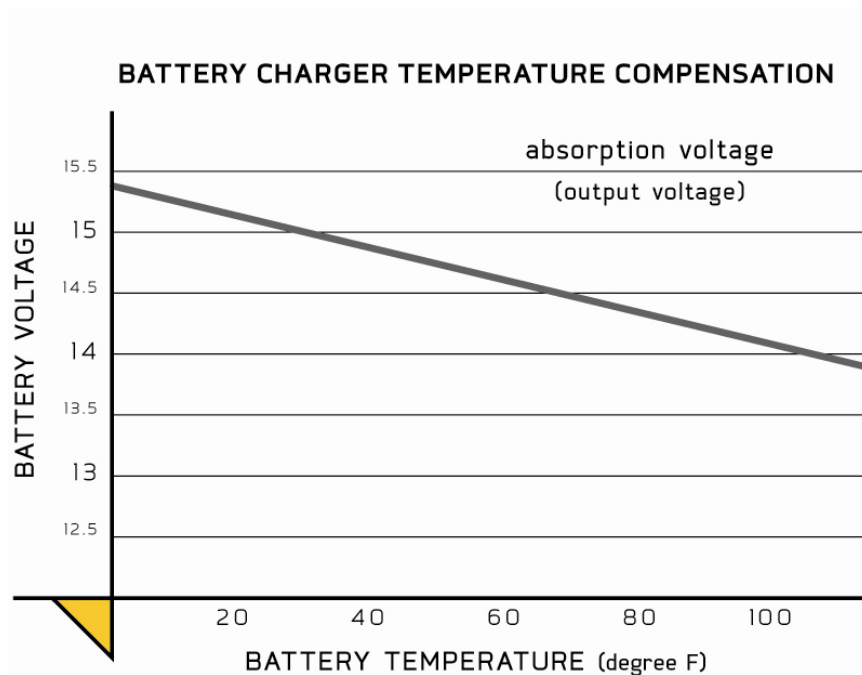

Digital Linear Chargers

Specifications

- Waterproof, shock-and vibration-resistant aluminum construction
- Saltwater tested and fully corrosion-resistant
- Short circuit, reverse polarity, and ignition protected
- For use with 12V/6 cell batteries that are flooded/wet cell, maintenance free or starved electrolyte (AGM) only
- FCC compliant
- UL listed to marine standard 1236
- 3 year warranty
- Replaces all existing current on-board chargers (excluding portables)
- No Price Increase
- Availability: November 2010





DIGITAL LINEAR ON-BOARD CHARGERS


PRODUCT CODE	PRODUCT DESCRIPTION
1821065	MK 106D (1 bank x 6 amps)
1821105	MK-110D (1 bank x 10 amps)
1822105	MK-210D (2 bank x 5 amps)
1823155	MK-315D (3 bank x 5 amps)
1822205	MK-220D (2 bank x 10 amps)
1823305	MK-330D (3 bank x 10 amps)
1824405	MK-440D (4 bank x 10 amps)
1822305	MK-230D (2 bank x 15 amps)
1823455	MK-345D (3 bank x 15 amps)
1824605	MK-460D (4 bank x 15 amps)

T4D-3500 OPEN DIMENSIONAL OVERVIEW

TOP VIEW

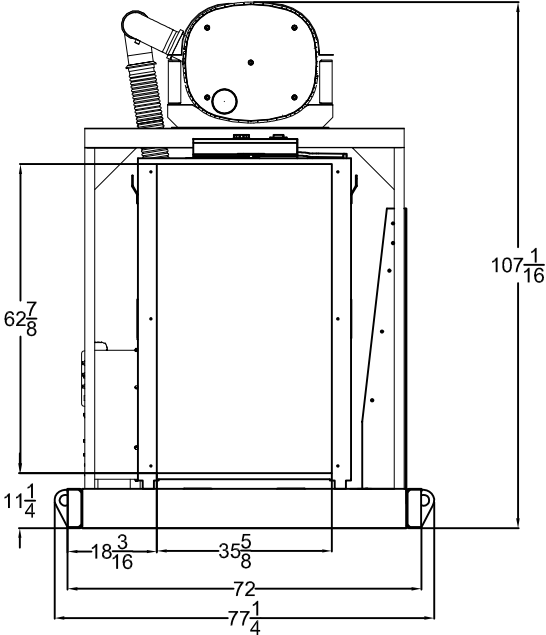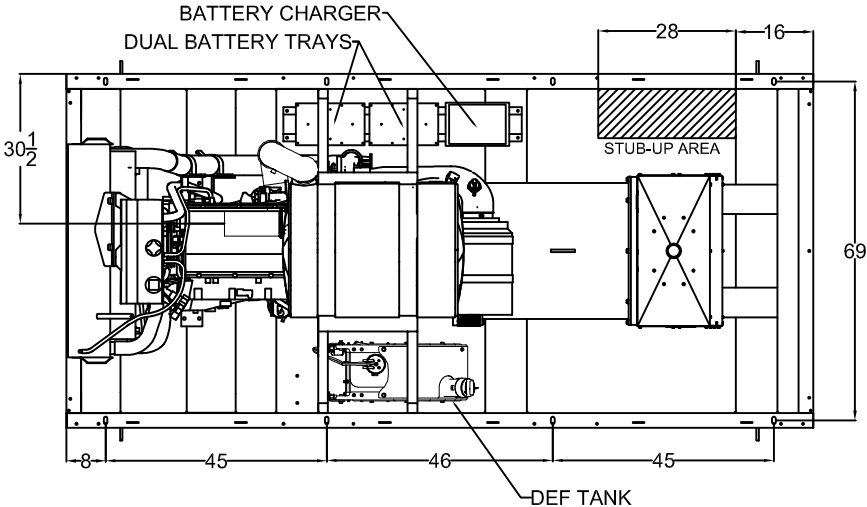

RADIATOR VIEW

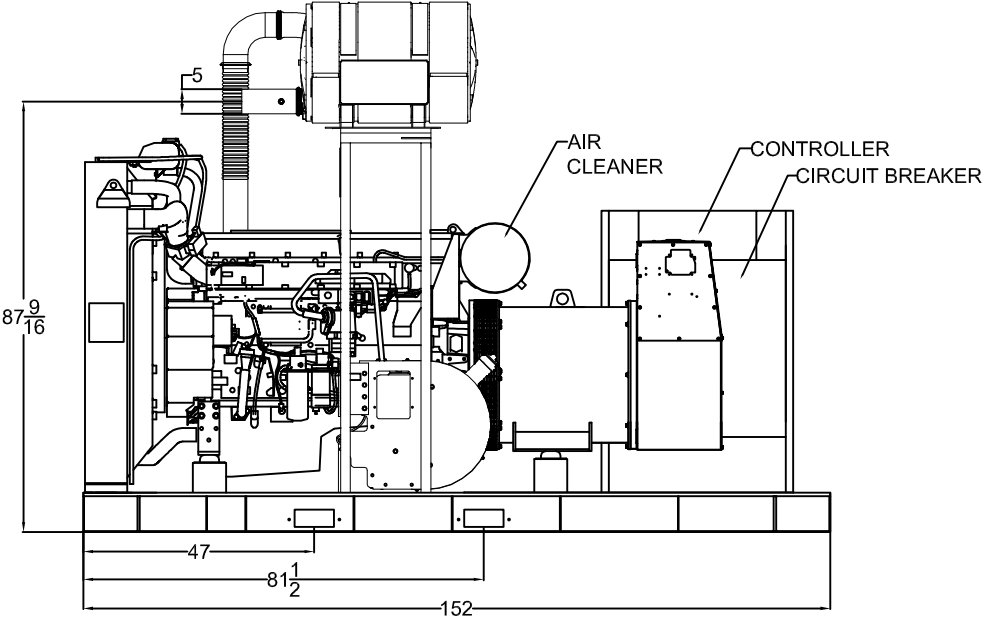


SIDE VIEW



T4D-3500 THRU T4D-4000 LEVEL 2 ENCLOSURE OUTLINE DIMENSIONS WITH RESIDENTIAL GRADE SILENCER

TOP VIEW


(GEN-SET HAS (6) DOORS, (3) SHOWN OPEN ARE TYPICAL FOR BOTH SIDES)

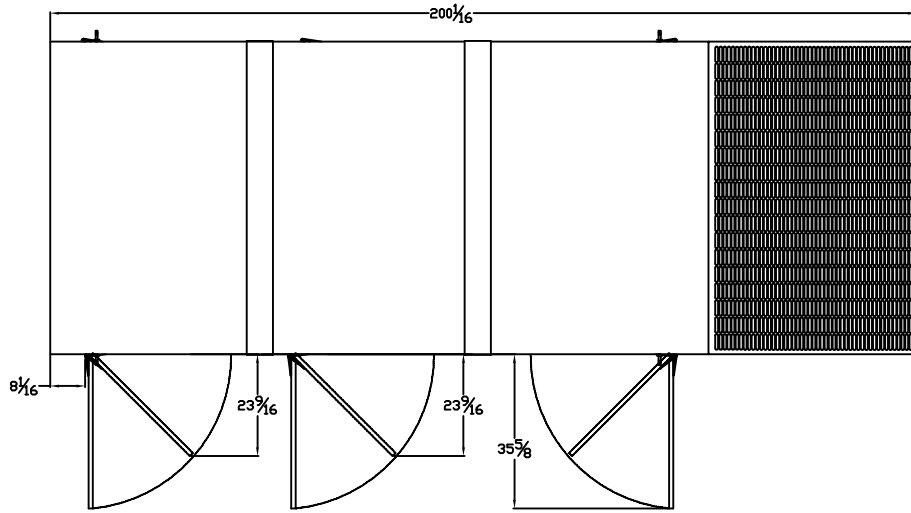


FRAME VIEW

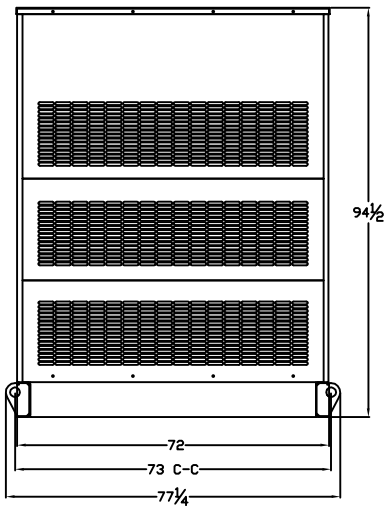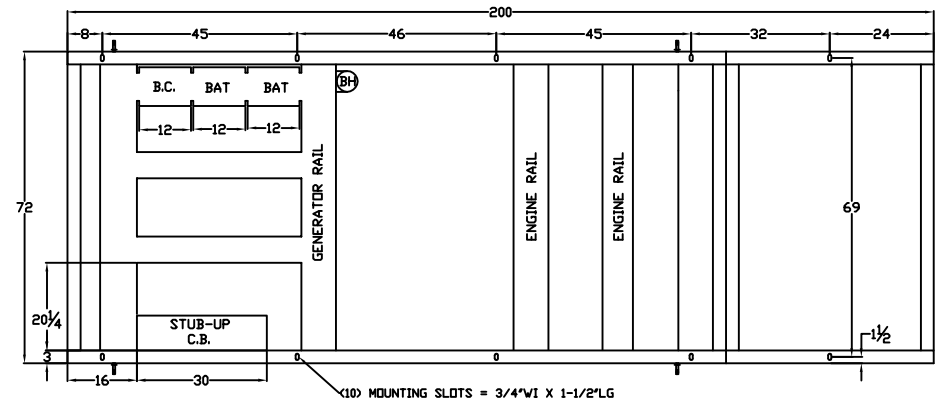

GENERATOR END VIEW

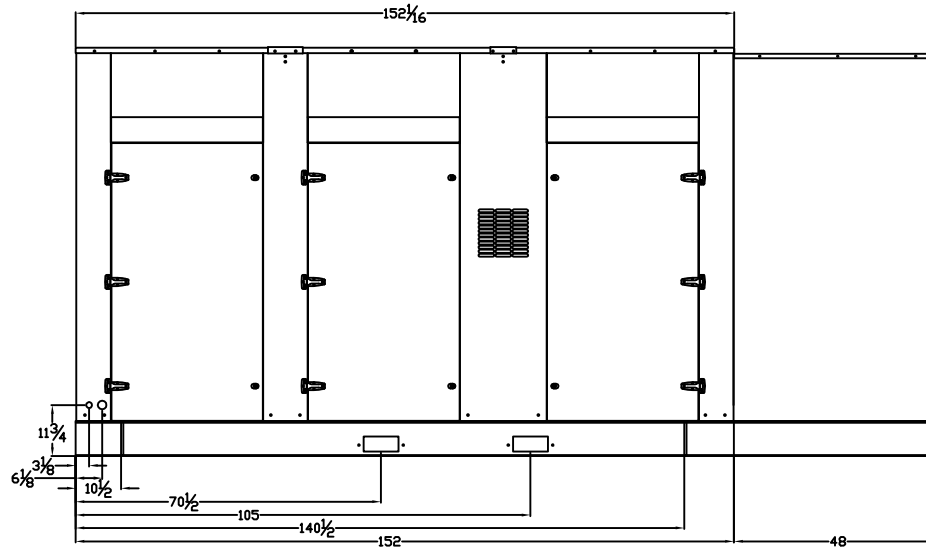

SIDE VIEW

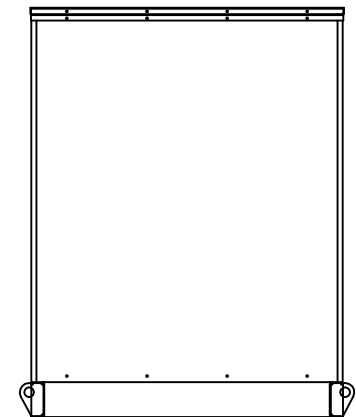

RADIATOR END VIEW