



GILLETTE GENERATORS

LIQUID COOLED DIESEL ENGINE GENERATOR SET

Model	HZ	STANDBY 120°C RISE
SPJD-300-60 HERTZ	60	30



All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.



UL2200, UL1446, UL508, UL142, UL498



NFPA 110, 99, 70, 37

All generator sets meet NFPA-110 Level 1, when equipped with the necessary accessories and installed per NFPA standards.



NEC 700, 701, 702, 708



NEMA ICS10, MG1, ICS6, AB1



ANSI C62.41, 27, 59, 32, 480, 40Q, 81U, 360-05



ASCE 7-05 & 7-10

All generator sets meet 180 MPH rating.



EPA 40CFR Part 60, 1048, 1054, 1065, 1068


GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	120°C RISE STANDBY RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	
SPJD-300-1-1	120	240	1	60	30/30	125	4 LEAD DEDICATED 1 PH
SPJD-300-3-2	120	208	3	60	30/37.5	104	12 LEAD LOW WYE
SPJD-300-3-3	120	240	3	60	30/37.5	90	12 LEAD HIGH DELTA
SPJD-300-3-4	277	480	3	60	30/37.5	45	12 LEAD HIGH WYE
SPJD-300-3-5	127	220	3	60	30/37.5	98	12 LEAD LOW WYE
SPJD-300-3-16	346	600	3	60	30/37.5	36	4 LEAD DEDICATED 3 PH

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 120° C "STANDBY RATINGS" are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 120°C (standby) R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.


60 HZ MODEL

SPJD-300

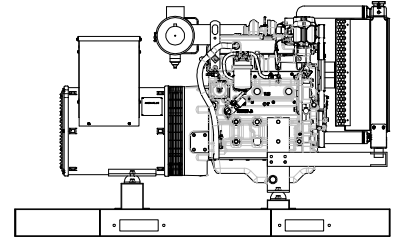

"OPEN" GEN-SET

There is no enclosure, so gen-set must be placed within a weather protected area, uninhabited by humans or animals, with proper ventilation. Silencer not supplied, as installation requirements are not known. However, this item is available as optional equipment.

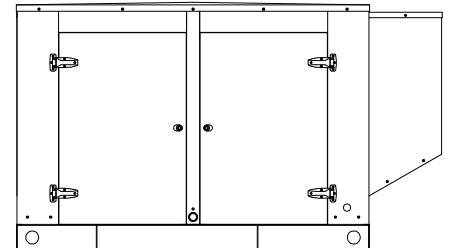

"LEVEL 2" HOUSED GEN-SET

Full aluminum weather protection and superior sound attenuation for specific low noise applications. Critical grade muffler is standard.

APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-300-60 HZ

GENERATOR SPECIFICATIONS

Manufacturer.....Stamford Electric Generators
Model & Type.....S1L2H1706, 4 Pole, 4 Lead, Single Phase
.....S1L2K1711, 4 Pole, 12 Lead re-connectable, Three Phase
.....PI144G17, 4 Pole, 6 Lead. 600V, Three Phase
Exciter.....Brushless, shunt excited
Voltage Regulator.....Solid State, HZ/Volts
Voltage Regulation.....½%, No load to full load
Frequency.....60 HZ
Frequency Regulation.....± ½% (½ cycle, no load to full load)
Unbalanced Load Capability.....100% of standby amps
Total Stator and Load Insulation.....Class H, 180°C
Temperature Rise.....120°C R/R, standby rating @ 40°C amb.
1 Ø Motor Starting @ 30% Voltage Dip (240V).....38 kVA
3 Ø Motor Starting @ 30% Voltage Dip (208-240V).....67 kVA
3 Ø Motor Starting @ 30% Voltage Dip (480V).....103 kVA
3 Ø Motor Starting @ 30% Voltage Dip (600V).....91 kVA
Bearing.....1, Pre-lubed and sealed
Coupling.....Direct flexible disc.
Total Harmonic Distortion.....Max 3½% (MIL-STD705B)
Telephone Interference Factor.....Max 50 (NEMA MG1-22)
Deviation Factor.....Max 5% (MIL-STD 405B)
Ltd. Warranty Period.....24 Months from date of start-up or
.....1000 hours use, first to occur.

GENERATOR FEATURES

- World Renown Stamford Electric Generator having UL-1446 certification.
- Full generator protection with **Deep Sea 7420** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Generator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Full amortisseur windings with UL-1446 certification.
- Complete engine-generator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-generator sets, before shipping.
- Self ventilating and drip-proof & revolving field design

ENGINE SPECIFICATIONS AND APPLICATIONS DATA

ENGINE

Manufacturer.....John Deere
Model and Type.....3029TFG89, 4 cycle
Aspiration.....Turbocharged
Cylinder Arrangement.....3 Cylinders, In-Line, 4 cycle
Displacement Cu. In. (Liters).....177 (2.9)
Bore & Stroke In. (Cm.).....4.2 x 4.3 (10.6 x 11.0)
Compression Ratio.....17.2:1
Main Bearings & Style.....4, Cu-Pd metal, Babbitt
Cylinder Head.....Cast Iron
Pistons.....4, Aluminum Wedge Type
Crankshaft.....Carbon Steel & Full Balanced
Exhaust Valve.....Heat Resisting Steel
Governor.....Mechanical
Frequency Regulation.....3% Isochronous
Air Cleaner.....Dry, Replaceable Cartridge
Engine Speed.....1800 rpm
Max Power, bhp (kwm) Standby.....47 (35)
BMEP: psi (kpa) Standby.....117 (807)
Ltd. Warrant Period.....24 Months or 2000 hrs, first to occur

FUEL SYSTEM

Type.....Diesel Fuel Oil (ASTM No. 2-D)
Combustion System.....Direct Injection
Fuel Injection Pump.....Stanadyne Rotary Type
Fuel Filter and Water Separator.....Yes

FUEL CONSUMPTION

GAL/HR (LITER/HR)	STANDBY
100% LOAD	3.0 (11.4)
75% LOAD	2.3 (8.7)
50% LOAD	1.6 (6.1)

OIL SYSTEM

Type.....Full Pressure
Oil Pan Capacity qt. (L).....8.5 (8)
Oil Pan Cap. W/ filter qt. (L).....9 (8.5)
Oil Filter.....1, Replaceable Spin-On

ELECTRICAL SYSTEM

Ignition System.....Electronic
Eng. Alternator and Starter:
Ground.....Negative
Volts DC.....12
Max. Amp Output of Alternator.....65
Recommended Battery to -18°C (0°F):..12 VDC, Size BCI# 24F
Max Dimensions: ..10 3/4" lg X 6 3/4" wi X 9" hi, with standard round posts. Min. output at 600 CCA. Battery tray (max. dim. at 12"lg x 7"wi), hold down straps, battery cables, and battery charger, is furnished. Installation of (1) starting battery is required, with possible higher AMP/HR rating, as described above, if normal environment averages -13°F (-25°C) or cooler.

CERTIFICATIONS

All engines are EPA emissions certified. All stationary diesel engines are Interim Tier IV compliant.

APPLICATION AND ENGINEERING DATA FOR MODEL SPJD-300-60 HZ

COOLING SYSTEM

Type of System	Pressurized, closed recovery
Coolant Pump	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades)	Pusher (7)
Fan Diameter inches (cm)	16" (40.6)
Ambient Capacity of Radiator °F (°C)	125 (52)
Engine Jacket Coolant Capacity Qt. (L)	6.0 (5.7)
Radiator Coolant Capacity Qt. (L)	6.46 (6.12)
Engine Heat Rejection. Btu/min (kw)	1412 (25)
Water Pump Capacity gpm (L/min)	24 (91)
Heat Reject Coolant: Btu/min (kw)	1412 (25)
Low Coolant Level Shutdowns	Standard
Note: Coolant temp. shut-down switch setting at 212°F (100°C) with 50/50 (water/antifreeze) mix.	

COOLING AIR REQUIREMENTS

Combustion Air cfm (m ³ /min)	127 (3.6)
Max. Air Intake Restrictions:	
Clean Air Cleaner, H ₂ O (kpa)	15 (3.8)
Intake Manifold Pressure, Psi (kpa)	11 (75)
Max. Allowable Temp. Rise, Amb:	
Air to Engine Inlet, °F (°C)	15 (8)
Radiator Cooling Air, SCFM (m ³ /min)	3200 (91)

EXHAUST SYSTEM

Exhaust Outlet Size	2"
Max. Back Pressure in H ₂ O (kpa)	30 (7.5)
Exhaust Flow, at rated KW, cfm (m ³ /min) ...	293 (8.3)
Exhaust Temp, at rated KW, °F (°C)	1076 (580)

SOUND LEVELS MEASURED IN dB(A)

	Open Set	Level 2 Encl.
Level 2, Critical Silencer	69	63

Note: Open sets (no enclosure) have silencer system choices due to unknown job-site applications. Level 2 enclosure has installed critical silencer with upgrade to Level 3 hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft. (305m) above 3000 ft. (914m) from sea level

DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (5.6°C) above 104°F (40°C)

DIMENSIONS AND WEIGHTS

	Open Set	Level 2 Enclosure
Length in (cm)	68 (173)	82 (208)
Width in (cm)	36 (91)	36 (92)
Height in (cm)	46 (117)	47 (119)
1 Ø Net Weight lbs (kg)	1369 (624)	1919 (870)
1 Ø Ship Weight lbs (kg)	1469 (666)	2079 (943)
3 Ø Net Weight lbs (kg)	1334 (605)	1884 (855)
3 Ø Ship Weight lbs (kg)	1434 (650)	2044 (927)

DEEP SEA 7420 MICROPROCESSOR CONTROLLER



Deep Sea 7420

The "7420" controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The "7420" controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAh, kVAh)

This controller includes expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.



Further expansion is available by adding the optional "WebNet" gateway interface module. This device will allow comprehensive monitoring of the generator via the cloud including identification, location, and status. Some advantages of this module include: reduced site visits and maintenance costs • remote fuel management • fault analysis • asset tracking • automatic system alerts • maximized system up-time.

STANDARD FEATURES FOR MODEL SPJD-300-60 HZ

STANDARD FEATURES

CONTROL PANEL:

Deep Sea 7420 digital microprocessor with logic allows programming in the field. Controller has:

- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
- Low oil pressure
- High engine temp
- Low Radiator Level
- Three auxiliary alarms
- Battery fail alarm
- Engine fail to start
- Engine over speed
- Engine under speed
- Over & under voltage

Also included is tamper-proof engine hour meter

ENGINE:

Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump • Thermostat • Pusher fan and guard • Exhaust manifold • 12 VDC battery charging alternator • Flexible exhaust connector • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture • flexible oil & radiator drain hose.

AC GENERATOR SYSTEM:

AC generator • Shunt excited • Brushless design • Circuit Breaker installed and wired to gen-set • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction • UL Certified

VOLTAGE REGULATOR:

½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation





DC ELECTRICAL SYSTEM:

Battery tray • Battery cables • Battery hold down straps • 2-stage battery float charger with maintaining & recharging automatic charge stages

WEATHER/SOUND PROOF ALUMINUM HOUSING CORROSION RESISTANT PROTECTION CONSISTING OF:

- 9 Heated And Agitated Wash Stages
- Zinc Phosphate Etching-coating Stage
- Final Baked On Enamel Powder Coat
- 18/8 Stainless Steel Hardware

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings.
DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

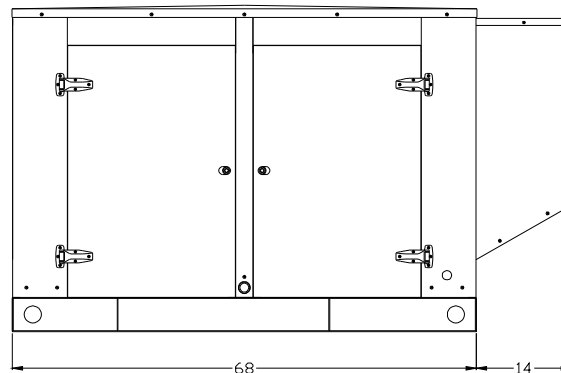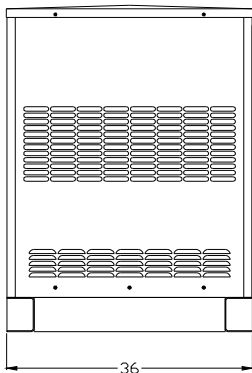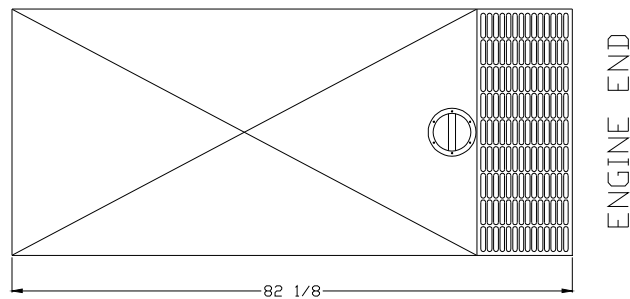



JOHN DEERE

ENGINE PERFORMANCE CURVE

Rating: Gross Power

Application: Generator

30 kVA Prime Market; Dual Frequency

1800 RPM (60 Hz)

PowerTech™ M 2.9L Engine
Model: 3029TFG89

42 hp (31 kW) Prime

47 hp (35 kW) Standby


Nominal Engine Power @ 1800 RPM				
Prime		Standby		
HP	kW	HP	kW	
42	31	47	35	

Generator Efficiency %	Fan Power (% of Standby)		Power Factor		Prime Rating		Standby Rating	
	hp	kW			kWe	kVA	kWe	kVA
88-92	3.0	2.2	0.8		25-27	32-34	28-30	35-37

Note 1: Based on nominal engine power.

Note 2: kWe / kVA rating assumes 90% efficiency. Generator Efficiency % will vary.

■ - Prime ○ - Standby

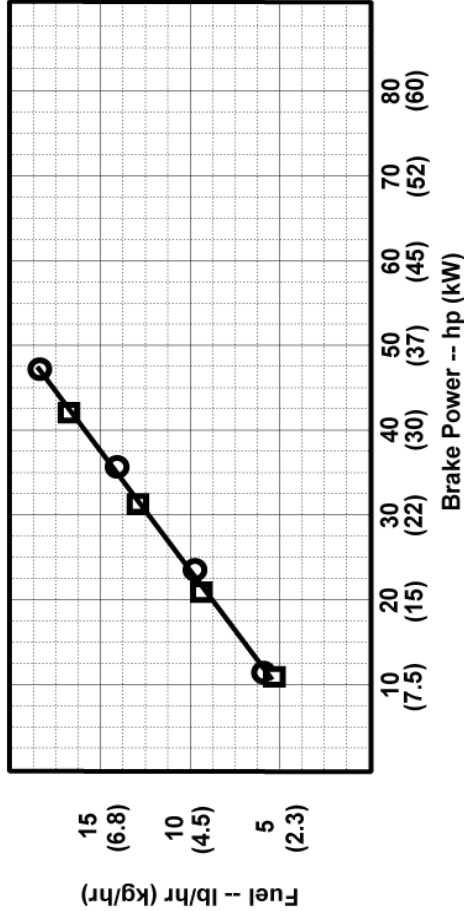

STANDARD CONDITIONS

Air Intake Restriction.....12 in.H₂O (3 kPa)
Exhaust Back Pressure.....60 in.H₂O (15 kPa)

Gross power guaranteed within + or - 5% at SAE

J1995 and ISO 3046 conditions:

77 °F (25 °C) air inlet temperature

29.31 in.Hg (99 kPa) barometer

104 °F (40 °C) fuel inlet temperature

0.853 fuel specific gravity @ 60 °F (15.5 °C)

Conversion factors:

Power: kW = hp x 0.746

Fuel: 1 gal = 7.1 lb, 1 L = 0.85kg

Torque: N.m = lb-ft x 1.356

All values are from currently available data and are subject to change without notice.

Notes:

Designed/Calibrated to meet:

- EPA Interim Tier 4
- EU Stage III A

Certified by:

Ref. Engine Emission Label

Performance Curve: 3029TFG89_U89_A18

Engine Installation Criteria

General Data

Model	3029TFG89		
Number of Cylinders		3	
Bore	106 mm	4.2 in.	
Stroke	110 mm	4.3 in.	
Displacement	2.9 L	177 in. ³	
Compression Ratio	17.2 : 1		
Valves per Cylinder, Intake/Exhaust	1 / 1		
Firing Order	1-2-3		
Combustion System	Direct injection		
Engine Type	In-line, 4-cycle		
Aspiration	Turbocharged		
Engine Crankcase Vent System	Open		

Physical Data

Length	717 mm	28.2 in.	
Width	529 mm	20.8 in.	
Height	961 mm	37.8 in.	
Weight, with oil & no coolant (Includes engine, flywheel housing, flywheel & electrics)	316 kg	697 lb	
Center of Gravity Location, X-axis From Rear Face of Block	253 mm	10.0 in.	
Center of Gravity Location, Y-axis Right of Crankshaft	9 mm	0.4 in.	
Center of Gravity Location, Z-axis Above Crankshaft	143 mm	5.6 in.	
Max. Allowable Static Bending Moment At Rear Face of Flywheel Housing with 5-G Load	814 N·m	600 lb-ft	
Thrust Bearing Load Limit Forward, Intermittent	4003 N	900 lb	
Thrust Bearing Load Limit Forward, Continuous	2224 N	500 lb	
Thrust Bearing Load Limit Rearward, Intermittent	2000 N	450 lb	
Thrust Bearing Load Limit Rearward, Continuous	1000 N	225 lb	
Max. Continuous Damper Temp	82 °C	180 °F	
Max. Torsional Vibration, Front of Crank	0.25 DDA		

Electrical System

Recommended Battery Capacity, 12V @32 °F (0 °C)	640 amps
Recommended Battery Capacity, 24V @32 °F (0 °C)	570 amps
Starter Rolling Current, 12V @32 °F (0 °C)	640 amps
Starter Rolling Current, 24V @32 °F (0 °C)	570 amps
Starter Rolling Current, 12V @-22 °F (-30 °C)	1000 amps
Starter Rolling Current, 24V @-22 °F (-30 °C)	700 amps
Min. Voltage at ECU during Cranking, 12V	6 volts
Min. Voltage at ECU during Cranking, 24V	10 volts
Max. Allowable Start Circuit Resistance, 12V	0.0012 Ohm
Max. Allowable Start Circuit Resistance, 24V	0.002 Ohm
Max. Voltage From Engine to Crankshaft, 12V	0.15 volts
Max. Voltage From Engine to Crankshaft, 24V	0.15 volts
Max. ECU Temperature	105 °C 221 °F
Max. Alternator Temperature	120 °C 248 °F
Max. Starter Temperature	120 °C 248 °F
Max. Temperature, All Other Electronics	125 °C 257 °F

Cooling System

Engine Heat Rejection	20.1 kW	1144 BTU/min
Engine Radiated Heat	kW	
Coolant Flow	110 L/min	29 gal/min
Thermostat Start to Open	82 °C	180 °F
Thermostat Fully Open	94 °C	201 °F
Engine Coolant Capacity	5.7 Liter	6.0 quart
Min. Coolant Fill Rate	11 L/min	2.9 gal/min
Min. Pressure Cap	70 kPa	10 psi
Min. Pump Inlet Pressure @203°F (95°C) Coolant	30 kPa	4 psia
Max. External Coolant Restriction	40 kPa	6 psi
Max. Top Tank Temperature	105 °C	221 °F
Max. Top Tank Temperature 95% of Operating Hours	100 °C	212 °F
Min. Limiting Ambient Temperature	47 °C	117 °F

Performance Curve: 3029TFG89_U89_A18

Engine Installation Criteria

Exhaust System

Exhaust Flow	8.3 m³/min	293 ft.³/min
Exhaust Temperature	580 °C	1076 °F
Max. Allowable Exhaust Restriction	7.5 kPa	30 in. H ₂ O
Max. Bending Moment on Turbo Outlet	7.0 N·m	5.2 lb-ft
Max. Shear on Turbine Outlet	11 kg	24 lb

Fuel System

ECU Description	NA	
Fuel Injection Pump	Stanadyne DB2	
Governor Type	Mechanical	
Governor Regulation	3-5	
Total Fuel Flow	95 kg/hr	209 lb/hr
Fuel Consumption	8.4 kg/hr	18.5 lb/hr
Fuel Temperature Rise, Inlet to Return	17.8 Δ°C	32 Δ°F
Max. Fuel Inlet Restriction	20 kPa	80 in. H ₂ O
Min. Fuel Inlet Pressure	7.6 kPa	30 in. H ₂ O
Max. Fuel Inlet Pressure	20 kPa	80 in. H ₂ O
Max. Fuel Return Pressure	20 kPa	80 in. H ₂ O
Max. Fuel Inlet Temperature	80 °C	176 °F
Fuel Filter @98% Efficiency	8 mic	

Lubrication System

Oil Pressure at Rated Speed	328 kPa	48 psi
Oil Pressure at Low Idle	NA	
Max. Oil Carryover in Blow-By	NA	
Max. Airflow in Blow-By	NA	
Max. Crankcase Pressure	0.5 kPa	2 in. H ₂ O

Air Intake System

Engine Air Flow	3.6 m³/min	127 ft.³/min
Air Mass Flow	252 kg/hr	556 lb/hr
Intake Manifold Pressure	74.8 kPa	10.8 psi
Maximum Allowable Temperature Rise, Ambient Air to Engine Inlet	8 Δ°C	15 Δ°F
Max. Air Intake Restriction, Clean Air Cleaner	3.75 kPa	15.0 in. H ₂ O
Max. Air Intake Restriction, Dirty Air Cleaner	6.25 kPa	25.0 in. H ₂ O
Air Cleaner Efficiency	99.9 %	

Performance Data

Rated Power, Prime	31 kW	42 HP
Rated Power, Standby	35 kW	47 HP
Rated Speed	1800 rpm	
Rated Torque, Prime	164.5 N·m	121 lb-ft
Rated Torque, Standby	185.7 N·m	137 lb-ft
BMEP, Prime	714 kPa	104 psi
Altitude Capability	3000 m	9843 ft
Friction Power @Rated Speed	16 kW	21 HP
Air:Fuel Ratio	29.5 : 1	
Smoke @Rated Speed	Bosch No.	
Noise @1 m	92.5 dB(A)	
0-100% Standby Load Acceptance	0.6 sec	
Load Acceptance, ISO 8528-5	G3	

Fuel Consumption	Prime		Standby	
	lb/hr	kg/h	lb/hr	kg/h
25 % Power	5.5	2.5	6.0	2.7
50 % Power	9.0	4.1	9.7	4.4
75 % Power	13.0	5.9	14.1	6.4
100 % Power	16.8	7.6	18.5	8.4

S1L2-H1 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited / Aux winding
Voltage Regulation	± 1%
No Load Excitation Voltage (V)	13 V
Full Load Excitation Voltage (V)	44 V

STAMFORD®

S1L2-H1 Winding 06 / 706

Electrical Data		
Insulation System	Class H	
Stator Winding	Double Layer Concentric	
Winding Pitch	Two Thirds	
Winding Leads	4	
Winding Number	06 / 706	
Number of Poles	4	
IP Rating	IP23	
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others	
Waveform Distortion	NO LOAD < 2% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%	
Short Circuit Ratio	1/Xd	
Steady State X/R Ratio	3.9	
	60 Hz	
Telephone Interference	TIF<50	
Voltage Series	240	240
Power Factor	0.8	1.0
kVA Base Rating (Class H)	29	31.3
Saturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	1.027	1.108
X'd Dir. Axis Transient	0.132	0.142
X''d Dir. Axis Subtransient	0.118	0.127
Xq Quad. Axis Reactance	1.086	1.172
X''q Quad. Axis Subtransient	0.137	0.148
XL Stator Leakage Reactance	0.075	0.081
X2 Negative Sequence Reactance	0.190	0.205
X0 Zero Sequence Reactance	0.005	0.005
Unsaturated Values in Per Unit at Base Ratings and Voltages		
Xd Dir. Axis Synchronous	1.438	1.552
X'd Dir. Axis Transient	0.152	0.164
X''d Dir. Axis Subtransient	0.138	0.149
Xq Quad. Axis Reactance	1.119	1.207
X''q Quad. Axis Subtransient	0.164	0.177
XL Stator Leakage Reactance	0.085	0.091
X2 Negative Sequence Reactance	0.228	0.246
X0 Zero Sequence Reactance	0.006	0.006
Time Constants (Seconds)		
T'd TRANSIENT TIME CONST.	0.028	
T''d SUB-TRANSTIME CONST.	0.001	
T'do O.C. FIELD TIME CONST.	0.122	
Ta ARMATURE TIME CONST.	0.011	

STAMFORD

S1L2-H1 Winding 06 / 706



Resistances in Ohms (Ω) at 22°C	
Stator Winding Resistance (Ra)	0.079 Ω per phase series connected
Rotor Winding Resistance (Rf)	0.891 Ω
Exciter Stator Winding Resistance	16.55 Ω
Exciter Rotor Winding Resistance	0.100 Ω per phase
Positive Sequence Resistance (R1)	0.099 Ω
Negative Sequence Resistance (R2)	0.114 Ω
Zero Sequence Resistance (R0)	0.099 Ω
Aux Winding Resistance (with winding 706 only)	2.388 Ω
Mechanical data	
Cooling Air	0.215 m ³ /sec (60Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.
Bearing	Single Bearing
Weight Complete Alternator	160.2 kg
Weight Wound Stator	63.39 kg
Weight Wound Rotor	61.14 kg
Moment of Inertia	0.2682 kgm ²
Shipping weight in a Crate	207 kg
Packing Crate Size	1050X570X960 mm
Maximum Over Speed	2250 RPM for two minutes
Bearing Drive End	N/A
Bearing Non-Drive End	Ball Bearing, 6306-2RS1

STAMFORD®

S1L2-H1 Winding 06 / 706

Single Phase Efficiency Curves

60Hz

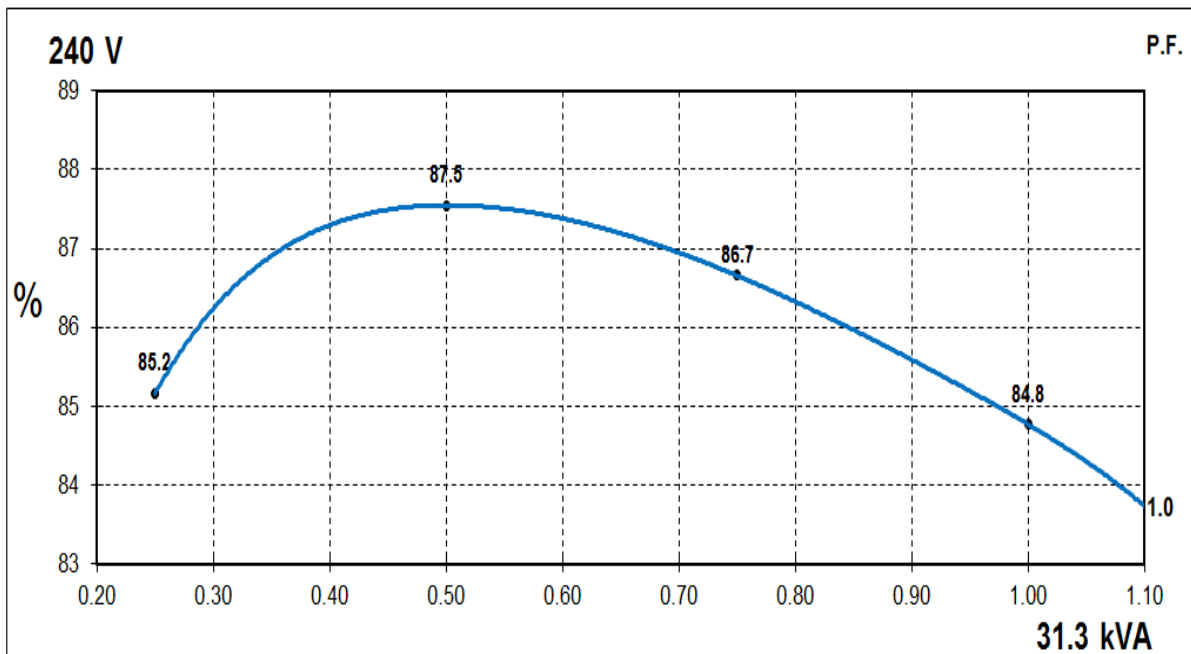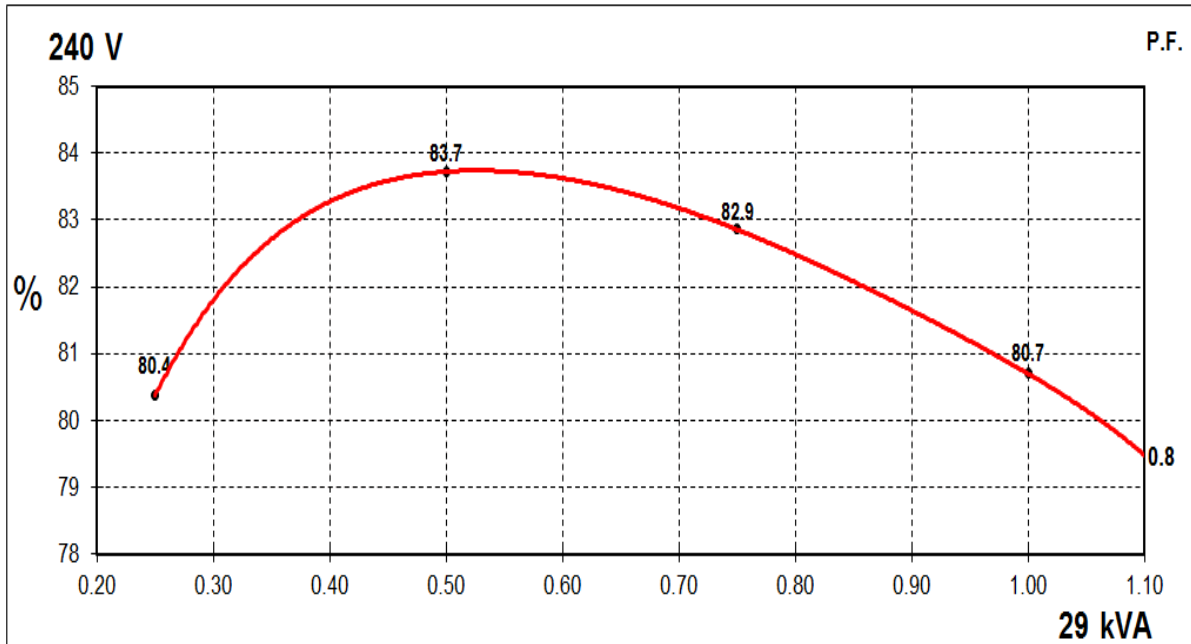


STAMFORD®

S1L2-H1 Winding 06 / 706

Locked Rotor Motor Starting Curves

60Hz

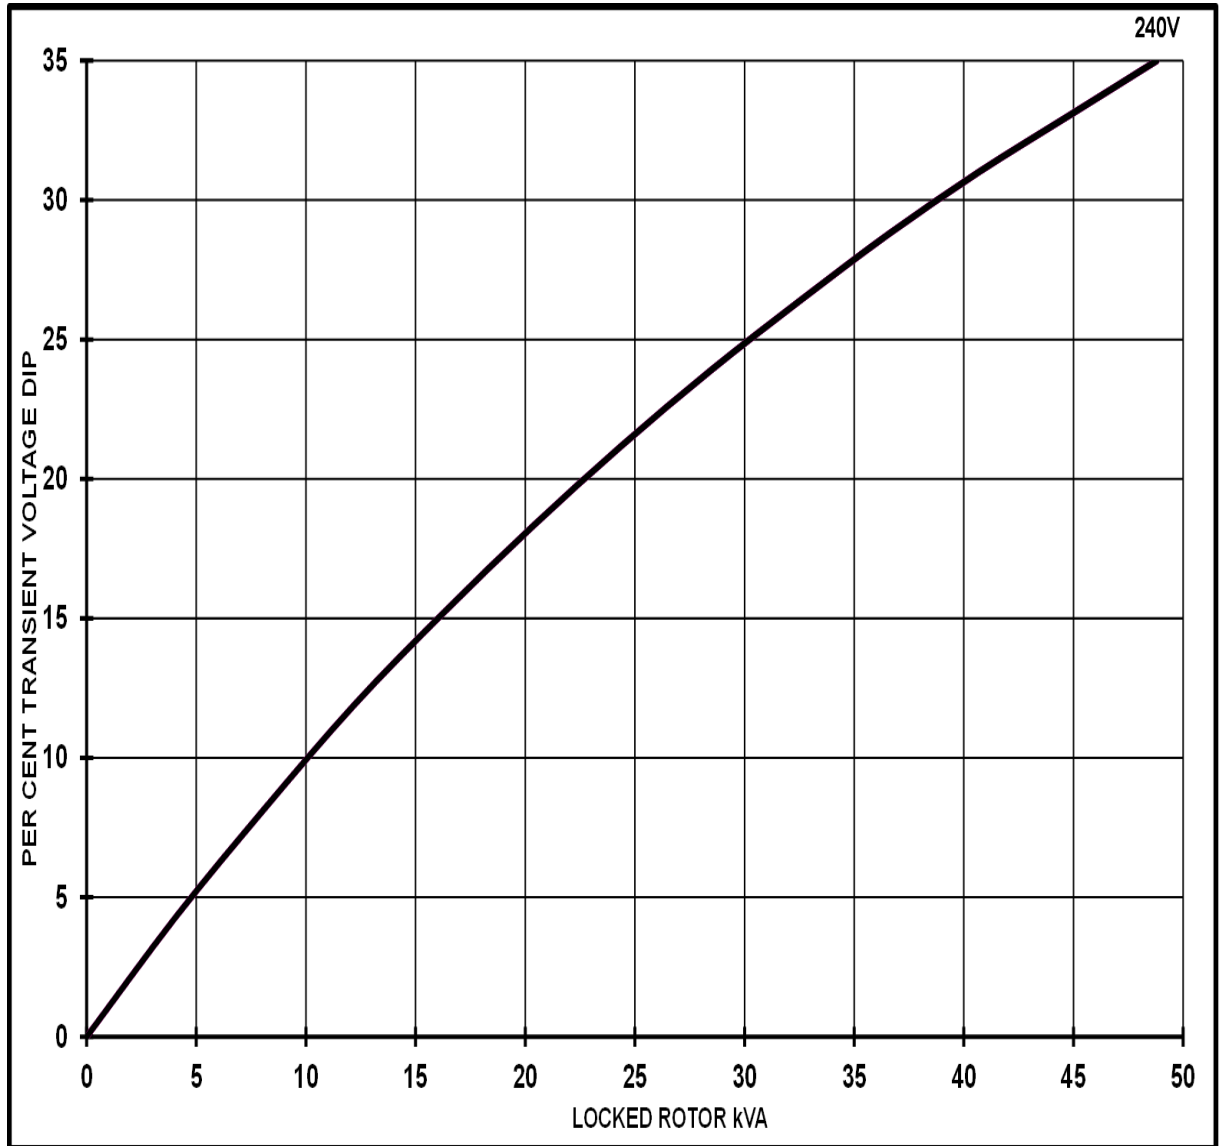


Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1.00	
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	

STAMFORD
S1L2-H1 Winding 06 / 706
Short Circuit Decrement Curve

*Note: Applicable only for Winding 706 (Auxiliary winding).
Winding 06(no Auxiliary winding) will not provide short circuit capability.*

60Hz

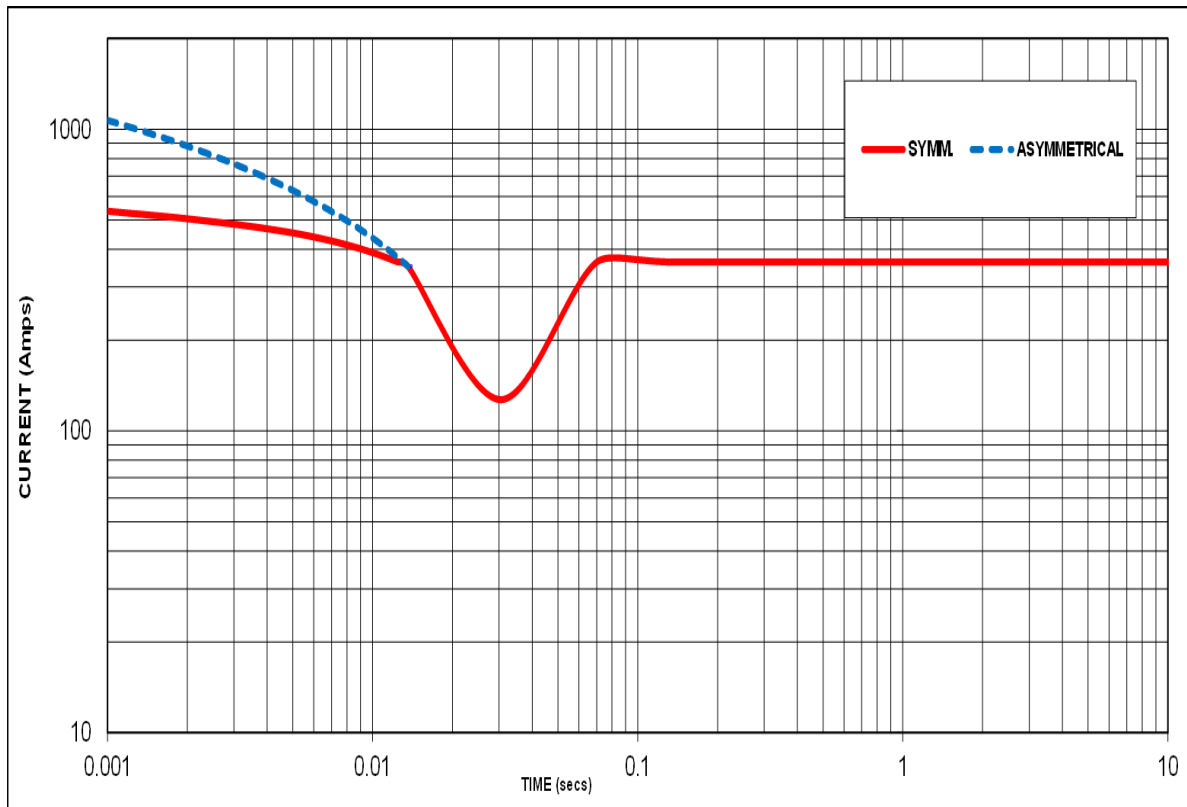


Sustained Short Circuit = 363 Amps

STAMFORD®

S1L2-H1 Winding 06 / 706

Typical Alternator Operating Chart

240V/60 Hz

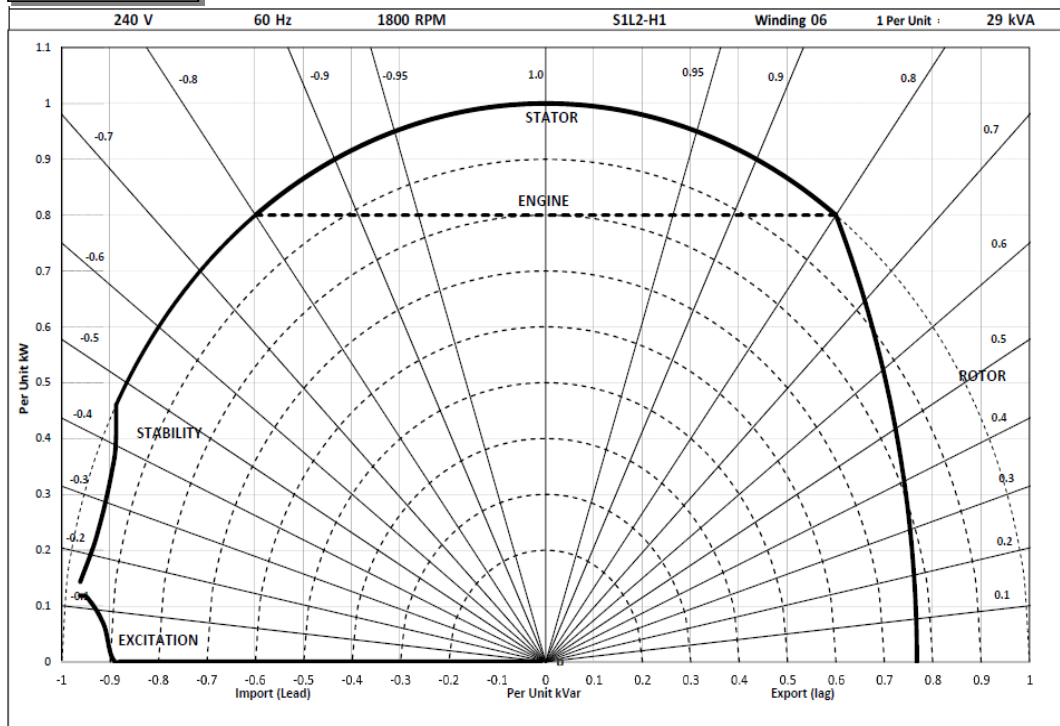

STAMFORD

S1L2-H1 Winding 06 / 706

RATINGS AT 0.8/1.0 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C		Standby - 150/40°C		Cont. H - 125/40°C		Cont. F - 105/40°C	
60 Hz	Series (V)	240	240	240	240	240	240	240	240
	Power Factor	0.8	1.0	0.8	1.0	0.8	1.0	0.8	1.0
	kVA	31.9	34.4	30.7	33.2	29.0	31.3	26.3	28.3
	kW	25.5	34.4	24.6	33.2	23.2	31.3	21.0	28.3
	Efficiency (%)	79.5	83.7	80.0	84.1	80.7	84.8	81.6	85.5
	kW Input	32.1	41.1	30.7	39.5	28.8	36.9	25.8	33.1

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.

Cummins and the Cummins logo are registered trade marks of Cummins Inc.

STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



S1L2-K1 - Technical Data Sheet

Standards

STAMFORD industrial alternators meet the requirements of IEC EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100 and AS1359. Other standards and certifications can be considered on request.

Quality Assurance

Alternators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.



Excitation and Voltage Regulators

Excitation System	
AVR Type	AVR Power
AS540	Self-Excited / Aux winding
Voltage Regulation	± 1%
No Load Excitation Voltage (V)	15 V
Full Load Excitation Voltage (V)	44 V

STAMFORD®

S1L2-K1 Winding 311 / 711

Electrical Data								
Insulation System	Class H							
Stator Winding	Double Layer Concentric							
Winding Pitch	Two Thirds							
Winding Leads	12							
Winding Number	311/711							
Number of Poles	4							
IP Rating	IP23							
RFI Suppression	EN 61000-6-2 & EN 61000-6-4, refer to factory for others							
Waveform Distortion	NO LOAD < 2% NON-DISTORTING BALANCED LINEAR LOAD < 5.0%							
Short Circuit Ratio	1/Xd							
Steady State X/R Ratio	6.5							
	50 Hz				60 Hz			
Telephone Interference	THF<2%				TIF<50			
Voltage Series Star	380/220	400/231	415/240	440/254	416/240	440/254	460/266	480/277
Voltage Parallel Star	190/110	200/115	208/120	220/127	208/120	220/127	230/133	240/138
Voltage Series Delta	220/110	230/115	240/120	254/127	240/120	254/127	266/133	277/138
kVA Base Rating (Class H)	36.6	40	40	N/A	42.2	44.8	N/A	48
Saturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	2.652	2.616	2.430		2.551	2.421		2.180
X'd Dir. Axis Transient	0.153	0.151	0.140		0.147	0.139		0.126
X''d Dir. Axis Subtransient	0.120	0.118	0.110		0.115	0.110		0.099
Xq Quad. Axis Reactance	1.148	1.132	1.052		1.105	1.048		0.944
X''q Quad. Axis Subtransient	0.162	0.159	0.148		0.155	0.147		0.133
XL Stator Leakage Reactance	0.077	0.076	0.071		0.075	0.071		0.064
X2 Negative Sequence Reactance	0.204	0.201	0.187		0.196	0.186		0.168
X0 Zero Sequence Reactance	0.041	0.041	0.038		0.040	0.038		0.034
Unsaturated Values in Per Unit at Base Ratings and Voltages								
Xd Dir. Axis Synchronous	3.262	3.217	2.989		3.138	2.978		2.681
X'd Dir. Axis Transient	0.176	0.173	0.161		0.169	0.160		0.144
X''d Dir. Axis Subtransient	0.140	0.139	0.129		0.135	0.128		0.115
Xq Quad. Axis Reactance	1.183	1.166	1.084		1.138	1.080		0.972
X''q Quad. Axis Subtransient	0.194	0.191	0.178		0.186	0.177		0.159
XL Stator Leakage Reactance	0.088	0.086	0.080		0.084	0.080		0.072
X2 Negative Sequence Reactance	0.245	0.242	0.224		0.236	0.224		0.201
X0 Zero Sequence Reactance	0.049	0.048	0.044		0.047	0.044		0.040
Time Constants (Seconds)								
T'd TRANSIENT TIME CONST.	0.029							
T''d SUB-TRANSTIME CONST.	0.003							
T'do O.C. FIELD TIME CONST.	0.231							
Ta ARMATURE TIME CONST.	0.007							

STAMFORD®

S1L2-K1 Winding 311 / 711


Resistances in Ohms (Ω) at 22°C		
Stator Winding Resistance (Ra)	0.177 Ω per phase series star connected	
Rotor Winding Resistance (Rf)	0.965 Ω	
Exciter Stator Winding Resistance	15.5 Ω	
Exciter Rotor Winding Resistance	0.112 Ω per phase	
Positive Sequence Resistance (R1)	0.221 Ω	
Negative Sequence Resistance (R2)	0.255 Ω	
Zero Sequence Resistance (R0)	0.221 Ω	
Aux Winding Resistance (with winding 711 only)	3.91 Ω	
Mechanical data		
Cooling Air	0.177 m³/sec (50Hz)	0.212 m³/sec (60Hz)
Shaft and Keys	All alternator rotors are dynamically balanced to better than BS6861: Part 1 Grade 2.5 for minimum vibration in operation.	
Bearing	Single Bearing	
Weight Complete Alternator	177.39 kg	
Weight Wound Stator	74.97 kg	
Weight Wound Rotor	66.76 kg	
Moment of Inertia	0.2978 kgm ²	
Shipping weight in a Crate	224 kg	
Packing Crate Size	1050X570X960 mm	
Maximum Over Speed	2250 RPM for two minutes	
Bearing Drive End	N/A	
Bearing Non-Drive End	Ball Bearing, 6306-2RS1	

STAMFORD®






S1L2-K1 Winding 311 / 711

Three Phase Efficiency Curves

50Hz Curves

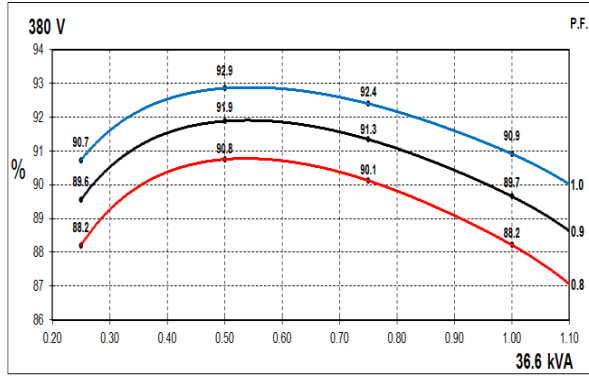

60Hz Curves

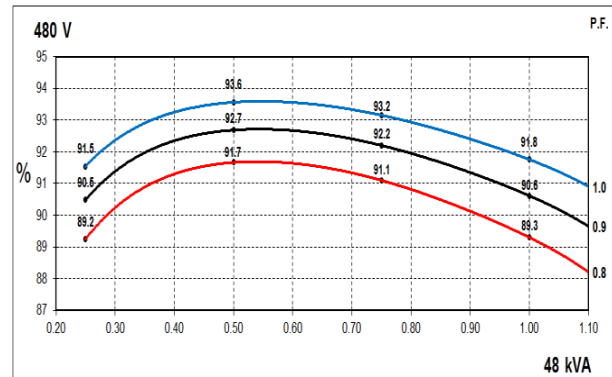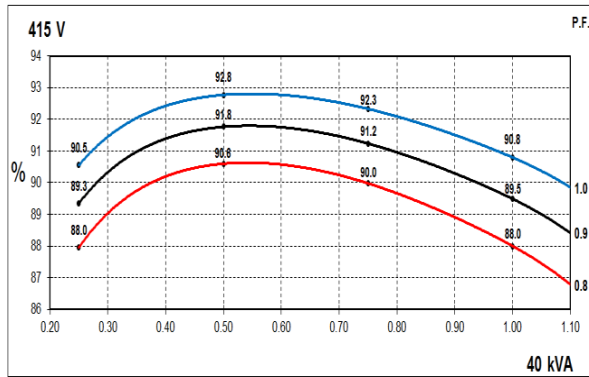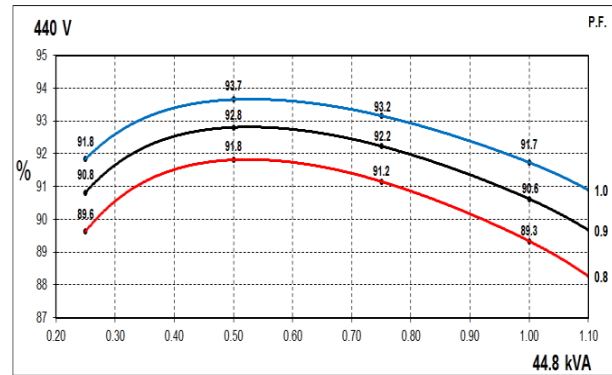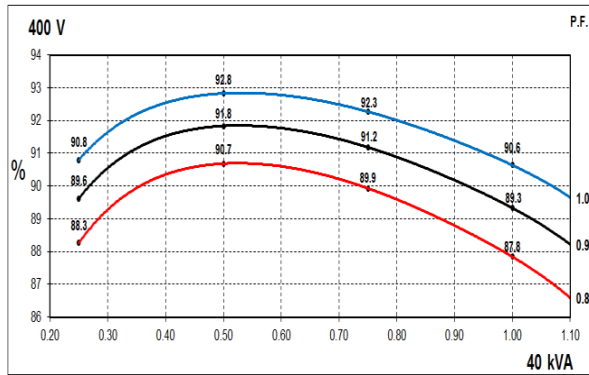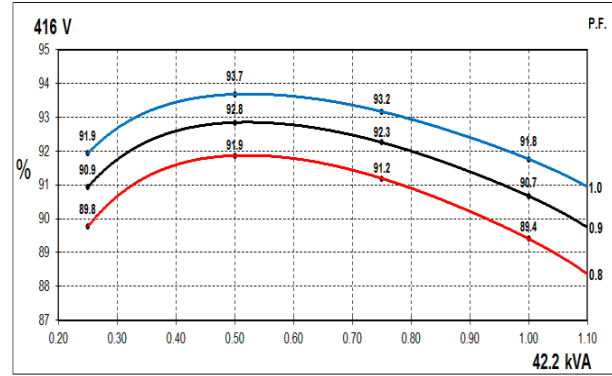


STAMFORD


S1L2-K1 Winding 311 / 711

Locked Rotor Motor Starting Curves

50Hz

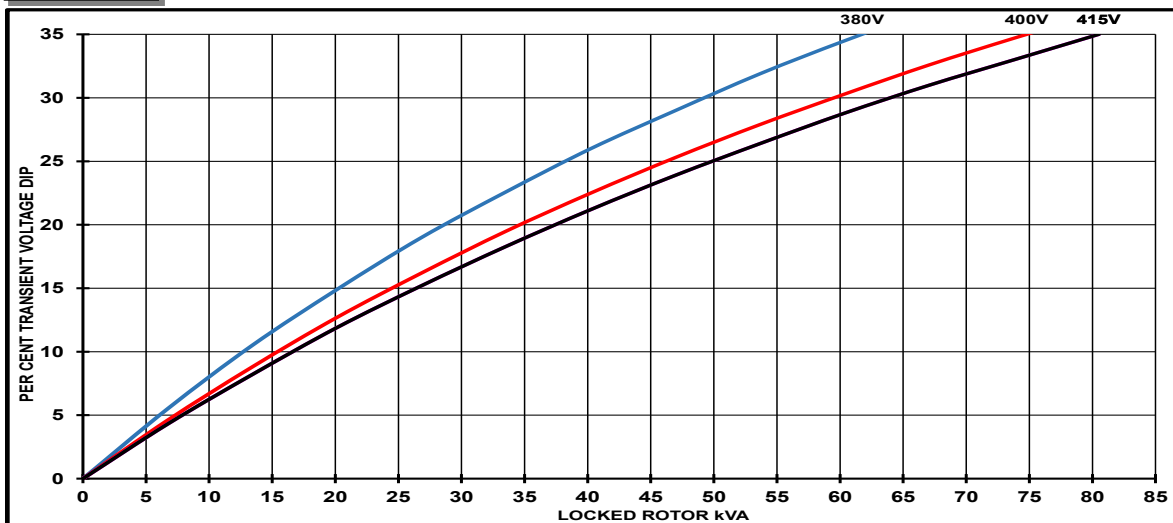

60Hz

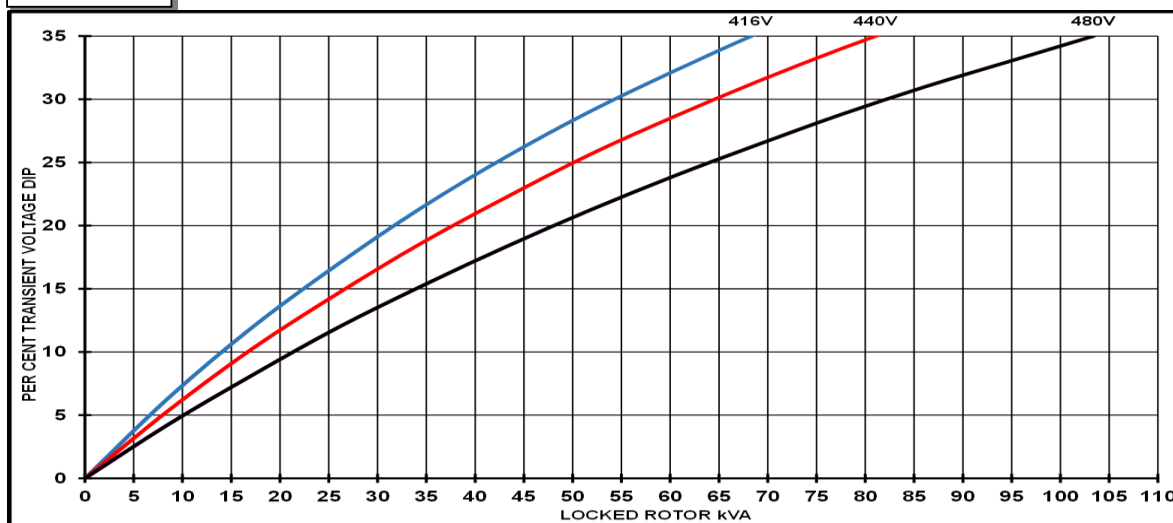

Transient Voltage Dip Scaling Factor		Transient Voltage Rise Scaling Factor
PF	Factor	For voltage rise multiply voltage dip by 1.25
< 0.5	1.00	
0.5	0.97	
0.6	0.93	
0.7	0.90	
0.8	0.85	
0.9	0.83	
1.0	0.80	


STAMFORD®

S1L2-K1 Winding 711

Three-phase Short Circuit Decrement Curve


Note: Applicable only for Winding 711 (Auxiliary winding).
Winding 311 (no Auxiliary winding) will not provide short circuit capability.

50Hz

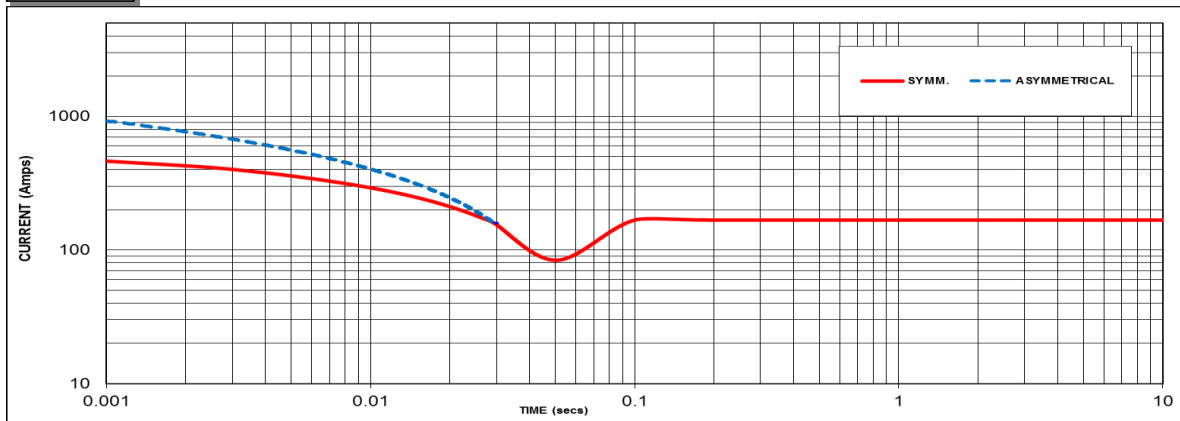

Sustained Short Circuit = 168 Amps

60Hz

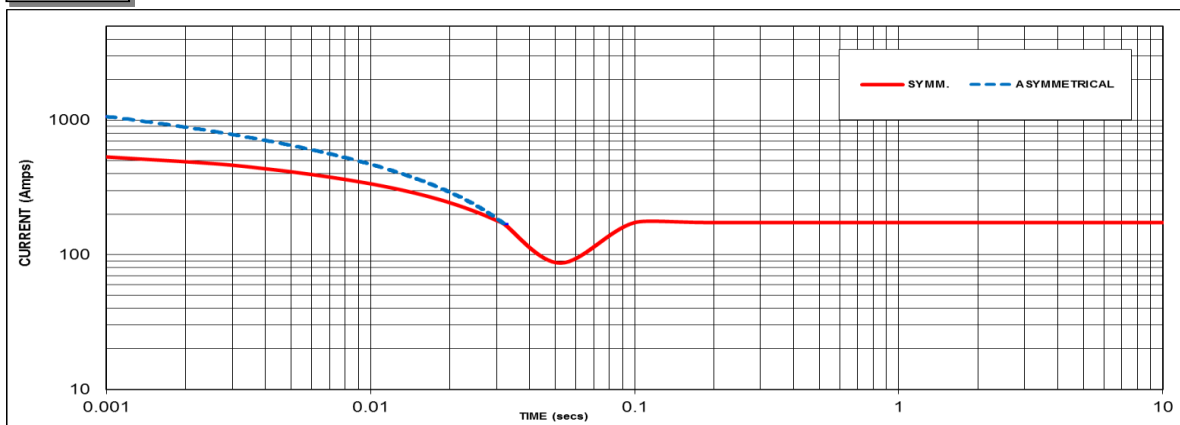

Sustained Short Circuit = 174 Amps

Note 1

The following multiplication factors should be used to adjust the values from curve between time 0.001 seconds and the minimum current point in respect of nominal operating voltage :

50Hz		60Hz	
Voltage	Factor	Voltage	Factor
380V	N/A	416V	X 1.00
400V	X 1.00	440V	X 1.06
415v	X 1.04	460V	N/A
440V	N/A	480V	X 1.15

The sustained current value is constant irrespective of voltage level

Note 2

The following multiplication factor should be used to convert the values calculated in accordance with NOTE 1 to those applicable to the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

Note 3


Curves are drawn for Star connected machines under no-load excitation at rated speeds. For other connection the following multipliers should be applied to current values as shown :
Parallel Star = Curve current value X 2
Series Delta = Curve current value X 1.732

STAMFORD®


S1L2-K1 Winding 311/711

Typical Alternator Operating Charts

400V/50Hz

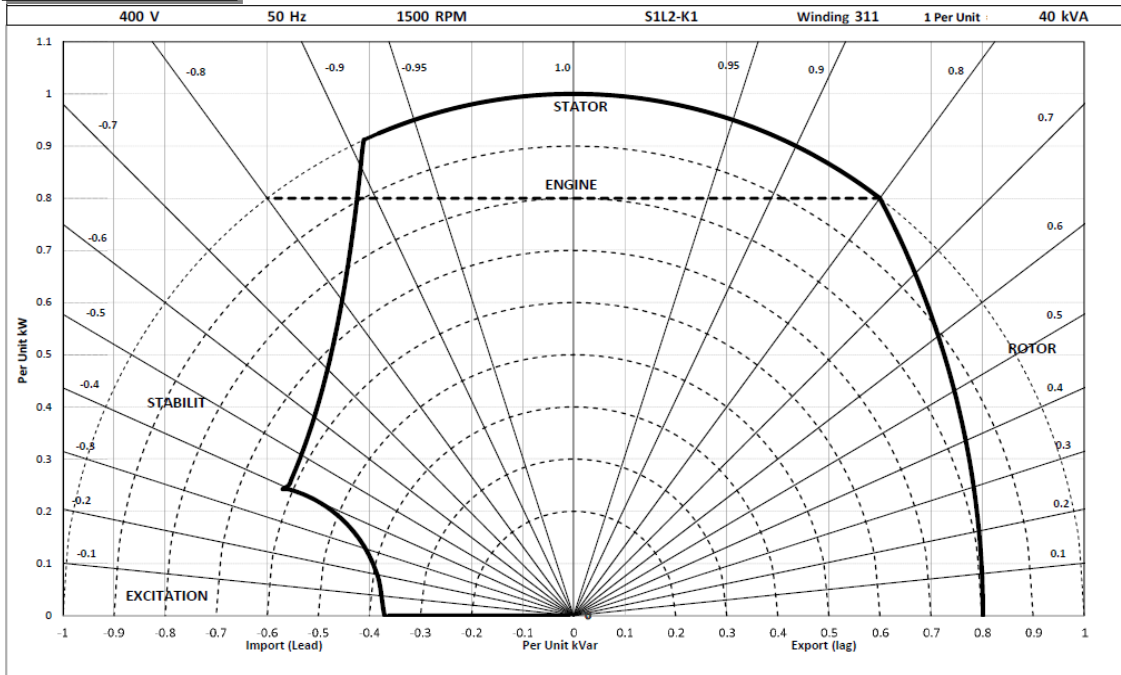

480V/60Hz

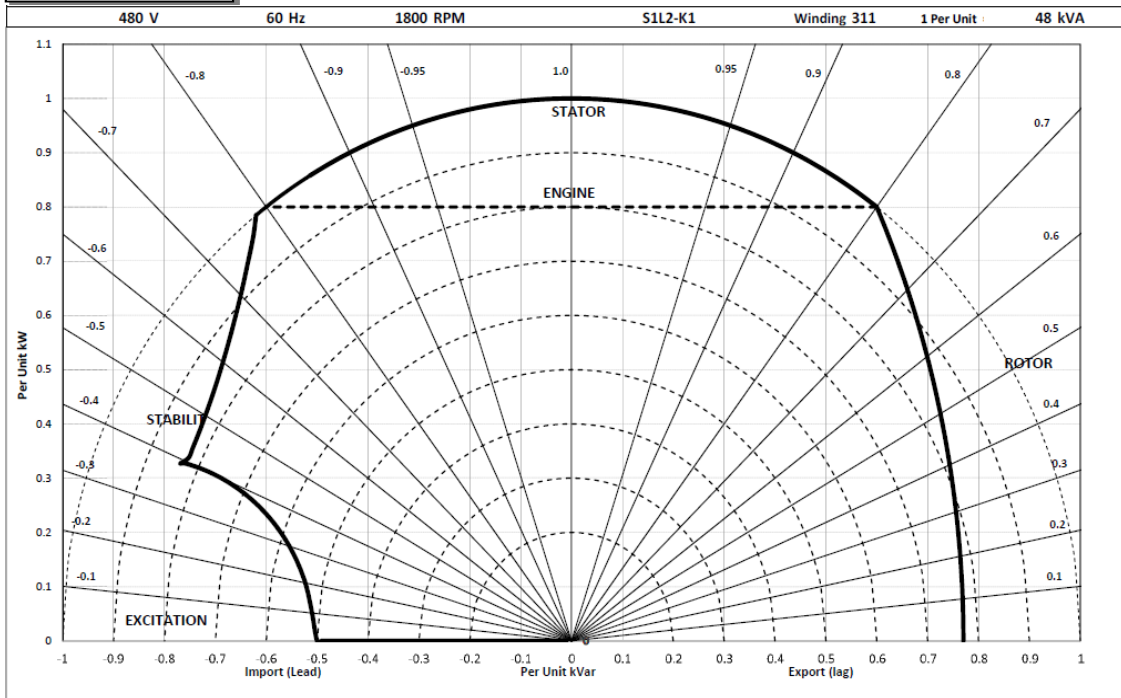

STAMFORD

S1L2-K1 Winding 311 / 711

RATINGS AT 0.8 POWER FACTOR

Class - Temp Rise		Standby - 163/27°C				Standby - 150/40°C				Cont. H - 125/40°C				Cont. F - 105/40°C			
50 Hz	Series Star (V)	380	400	415	440	380	400	415	440	380	400	415	440	380	400	415	440
	Parallel Star (V)	190	200	208	220	190	200	208	220	190	200	208	220	190	200	208	220
	Series Delta (V)	220	230	240	254	220	230	240	254	220	230	240	254	220	230	240	254
	kVA	40.3	44.0	44.0	N/A	39.0	42.6	42.6	N/A	36.6	40.0	40.0	N/A	33.3	36.4	36.4	N/A
	kW	32.2	35.2	35.2	N/A	31.2	34.1	34.1	N/A	29.3	32.0	32.0	N/A	26.6	29.1	29.1	N/A
	Efficiency (%)	87.1	86.6	86.8	N/A	87.4	87.0	87.2	N/A	88.2	87.8	88.0	N/A	89.0	88.7	88.8	N/A
	kW Input	37.0	40.7	40.6	N/A	35.7	39.2	39.1	N/A	33.2	36.4	36.4	N/A	29.9	32.8	32.8	N/A

60 Hz	Series Star (V)	416	440	460	480	416	440	460	480	416	440	460	480	416	440	460	480
	Parallel Star (V)	208	220	230	240	208	220	230	240	208	220	230	240	208	220	230	240
	Delta (V)	240	254	266	277	240	254	266	277	240	254	266	277	240	254	266	277
	kVA	46.5	49.3	N/A	52.8	45.2	47.9	N/A	51.2	42.2	44.8	N/A	48.0	38.4	40.7	N/A	43.7
	kW	37.2	39.4	N/A	42.2	36.2	38.3	N/A	41.0	33.8	35.8	N/A	38.4	30.8	32.6	N/A	35.0
	Efficiency (%)	88.3	88.3	N/A	88.2	88.7	88.6	N/A	88.6	89.4	89.3	N/A	89.3	90.1	90.1	N/A	90.0
	kW Input	42.1	44.7	N/A	47.9	40.8	43.3	N/A	46.2	37.8	40.1	N/A	43.0	34.1	36.1	N/A	38.8

De-Rates

All values tabulated above are subject to the following reductions:

- 3% for every 500 meters by which the operating altitude exceeds 1000 meters above mean sea level
- 3% for every 5°C by which the operational ambient temperature exceeds 40°C
- For any other operating conditions impacting the cooling circuit please refer to applications

Note: Requirement for operating in an ambient exceeding 60°C and altitude exceeding 4000 meters must be referred to applications.

Dimensional and Torsional Drawing

For dimensional and torsional information please refer to the alternator General Arrangement and rotor drawings available on our website (<http://stamford-avk.com/>)

Note: Continuous development of our products means that the information contained in our data sheets can change without notice, and specifications should always be confirmed with Cummins Generator Technologies prior to purchase.



Follow us @stamfordavk



Cummins Generator Technologies



View our videos at youtube.com/stamfordavk

news.stamford-avk.com

For Applications Support:
applications@cummins.com

For Customer Service:
service-engineers@stamford-avk.com

For General Enquiries:
info@cumminsgeneratortechnologies.com

Copyright 2016. Cummins Generator Technologies Ltd. All rights reserved.

Cummins and the Cummins logo are registered trade marks of Cummins Inc.


STAMFORD is a registered trade mark of Cummins Generator Technologies Ltd.



STAMFORD[®]

PI144G - Winding 17

Technical Data Sheet

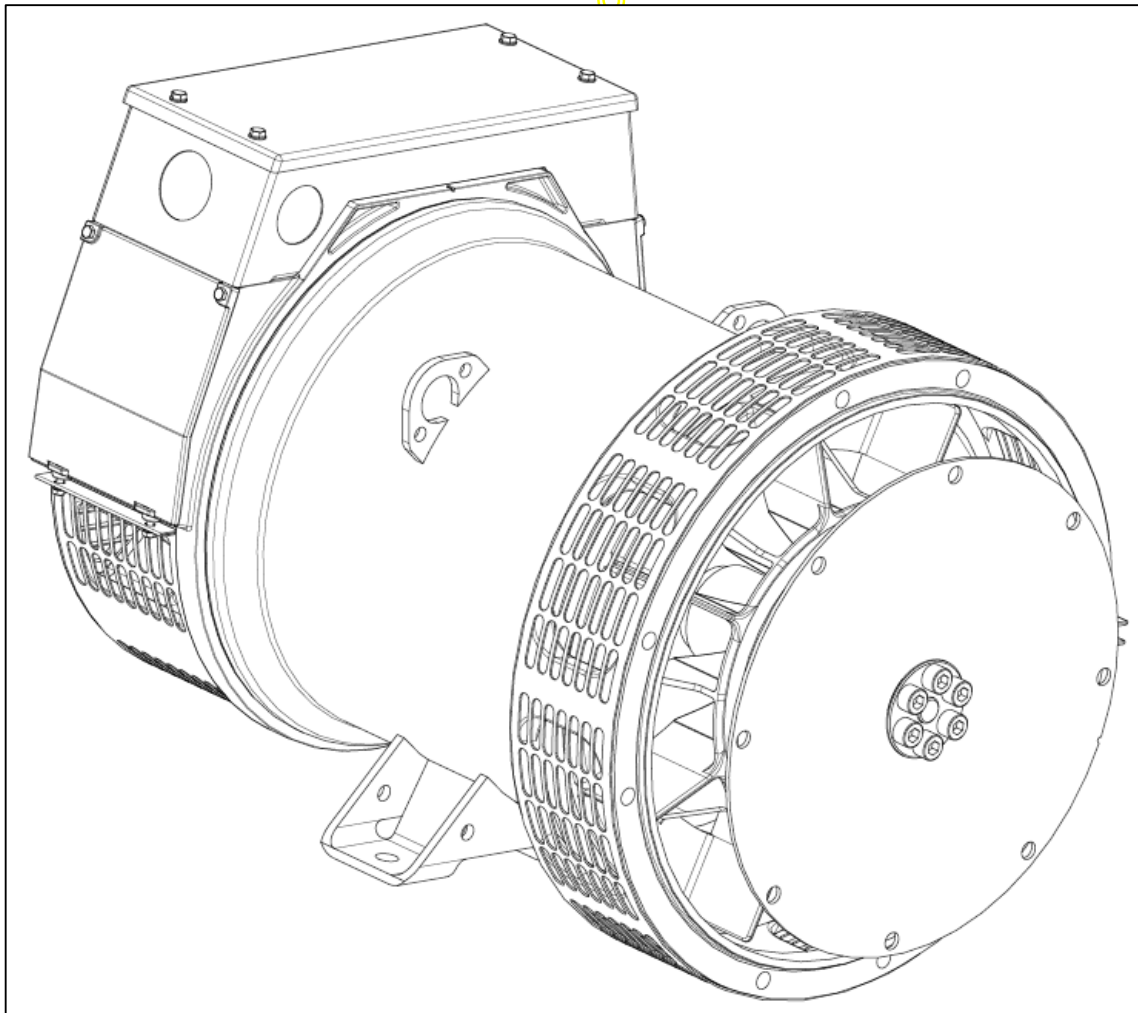

SPECIFICATIONS & OPTIONS

STANDARDS

Stamford industrial generators meet the requirements of BS EN 60034 and the relevant section of other international standards such as BS5000, VDE 0530, NEMA MG1-32, IEC34, CSA C22.2-100, AS1359. Other standards and certifications can be considered on request.

VOLTAGE REGULATOR

AS480 AVR fitted as STANDARD

With this self-excited system the main stator provides power via the AVR to the exciter stator. The high efficiency semi-conductors of the AVR ensure positive build-up from initial low levels of residual voltage.

The exciter rotor output is fed to the main rotor through a three-phase full-wave bridge rectifier. The rectifier is protected by a surge suppressor against surges caused, for example, by short circuit or out-of-phase paralleling. The AS480 will support limited accessories, RFI suppression remote voltage trimmer and for the P1 range only a 'droop' Current Transformer (CT) to permit parallel operation with other ac generators.

The AVR is can be fitted to either side of the generator in its own housing in the non-drive end bracket.

Excitation Boost System (EBS) (OPTIONAL)

The EBS is a single, self-contained unit, attached to the non-drive end of the generator.

The EBS unit consists of the Excitation Boost Controller (EBC) and an Excitation Boost Generator (EBG). Under fault conditions, or when the generator is subjected to a large impact load such as a motor starting, the generator voltage will drop. The EBC senses the drop in voltage and engages the output power of the EBG. This additional power feeds the generator's excitation system, supporting the load until breaker discrimination can remove the fault or enable the generator to pick up a motor and drive the voltage recovery.

WINDINGS & ELECTRICAL PERFORMANCE

All generator stators are wound to 2/3 pitch. This eliminates triplen (3rd, 9th, 15th ...) harmonics on the voltage waveform and is found to be the optimum design for trouble-free supply of non-linear loads. The 2/3 pitch design avoids excessive neutral currents sometimes seen with higher winding pitches, when in parallel with the mains. A fully connected damper winding reduces oscillations during paralleling. This winding, with the 2/3 pitch and carefully selected pole and tooth designs, ensures very low waveform distortion.

TERMINALS & TERMINAL BOX

Standard generators are 3-phase reconnectable with 12 ends brought out to the terminals, which are mounted at the non-drive end of the generator. Dedicated single phase generators are also available. A sheet steel terminal box contains provides ample space for the customers' wiring and gland arrangements. Alternative terminal boxes are available for customers who want to fit additional components in the terminal box.

SHAFT & KEYS

All generator rotors are dynamically balanced to better than BS6861:Part 1 Grade 2.5 for minimum vibration in operation. Two bearing generators are balanced with a half key.

INSULATION / IMPREGNATION

The insulation system is class 'H'.

All wound components are impregnated with materials and processes designed specifically to provide the high build required for static windings and the high mechanical strength required for rotating components.

QUALITY ASSURANCE

Generators are manufactured using production procedures having a quality assurance level to BS EN ISO 9001.

The stated voltage regulation may not be maintained in the presence of certain radio transmitted signals. Any change in performance will fall within the limits of Criteria 'B' of EN 61000-6-2:2001. At no time will the steady-state voltage regulation exceed 2%.

DE RATES

All values tabulated on page 6 are subject to the following reductions

5% when air inlet filters are fitted.

3% for every 500 metres by which the operating altitude exceeds 1000 metres above mean sea level.

3% for every 5°C by which the operational ambient temperature exceeds 40°C.

Note: Requirement for operating in an ambient exceeding 60°C must be referred to the factory.

5% For reverse rotation

(Standard rotation CW when viewed from DE)

NB Continuous development of our products entitles us to change specification details without notice, therefore they must not be regarded as binding.

Front cover drawing typical of product range.

APPROVED DOCUMENT

PI144G
WINDING 17

STAMFORD

CONTROL SYSTEM	STANDARD AS480 AVR (SELF EXCITED)
VOLTAGE REGULATION	± 1.0 %
SUSTAINED SHORT CIRCUIT	SELF EXCITED MACHINES DO NOT SUSTAIN A SHORT CIRCUIT CURRENT

CONTROL SYSTEM	AS480 AVR WITH OPTIONAL EXCITATION BOOST SYSTEM (EBS)
SUSTAINED SHORT CIRCUIT	REFER TO SHORT CIRCUIT DECREMENT CURVE (page 5)

INSULATION SYSTEM	CLASS H
PROTECTION	IP23
RATED POWER FACTOR	0.8
STATOR WINDING	DOUBLE LAYER CONCENTRIC
WINDING PITCH	TWO THIRDS
WINDING LEADS	12
STATOR WDG. RESISTANCE	0.306 Ohms PER PHASE AT 22°C SERIES STAR CONNECTED
ROTOR WDG. RESISTANCE	0.857 Ohms at 22°C
EXCITER STATOR RESISTANCE	20.3 Ohms at 22°C
EXCITER ROTOR RESISTANCE	0.201 Ohms PER PHASE AT 22°C
EBS STATOR RESISTANCE	12.9 Ohms at 22°C
R.F.I. SUPPRESSION	BS EN 61000-6-2 & BS EN 61000-6-4, VDE 0875G, VDE 0875N. refer to factory for others
WAVEFORM DISTORTION	NO LOAD < 1.5% NON-DISTORTING LINEAR LOAD < 5.0%
MAXIMUM OVERSPEED	2250 Rev/Min
BEARING DRIVE END	BALL. 6309-2RS (ISO)
BEARING NON-DRIVE END	BALL. 6306-2RS (ISO)

	1 BEARING		2 BEARING	
	WITH EBS	WITHOUT EBS	WITH EBS	WITHOUT EBS
WEIGHT COMP. GENERATOR	160 kg	158.3 kg	163 kg	161.3 kg
WEIGHT WOUND STATOR	68 kg	68 kg	68 kg	68 kg
WEIGHT WOUND ROTOR	57.39 kg	55.68 kg	58.39 kg	56.69 kg
WR ² INERTIA	0.2196 kgm ²	0.2179 kgm ²	0.2198 kgm ²	0.2181 kgm ²
SHIPPING WEIGHTS in a crate	178 kg	176.3 kg	187 kg	185.3 kg
PACKING CRATE SIZE	85 x 51 x 67 (cm)		85 x 51 x 67 (cm)	
TELEPHONE INTERFERENCE	THF<2%		TIF<50	
COOLING AIR	0.122 m³/sec 251 cfm			
VOLTAGE SERIES STAR	600			
kVA BASE RATING FOR REACTANCE VALUES	37.5			
X _d DIR. AXIS SYNCHRONOUS	1.9			
X' _d DIR. AXIS TRANSIENT	0.17			
X'' _d DIR. AXIS SUBTRANSIENT	0.13			
X _q QUAD. AXIS REACTANCE	0.90			
X'' _q QUAD. AXIS SUBTRANSIENT	0.19			
X _L LEAKAGE REACTANCE	0.07			
X ₂ NEGATIVE SEQUENCE	0.16			
X ₀ ZERO SEQUENCE	0.07			

REACTANCES ARE SATURATED		VALUES ARE PER UNIT AT RATING AND VOLTAGE INDICATED	
T' _d TRANSIENT TIME CONST.		0.024 s	
T'' _d SUB-TRANSTIME CONST.		0.006 s	
T' _{do} O.C. FIELD TIME CONST.		0.55 s	
T _a ARMATURE TIME CONST.		0.007 s	
SHORT CIRCUIT RATIO		1/X _d	


PI144G

STAMFORD


Winding 17

Locked Rotor Motor Starting Curves

AS480 AVR Without EBS

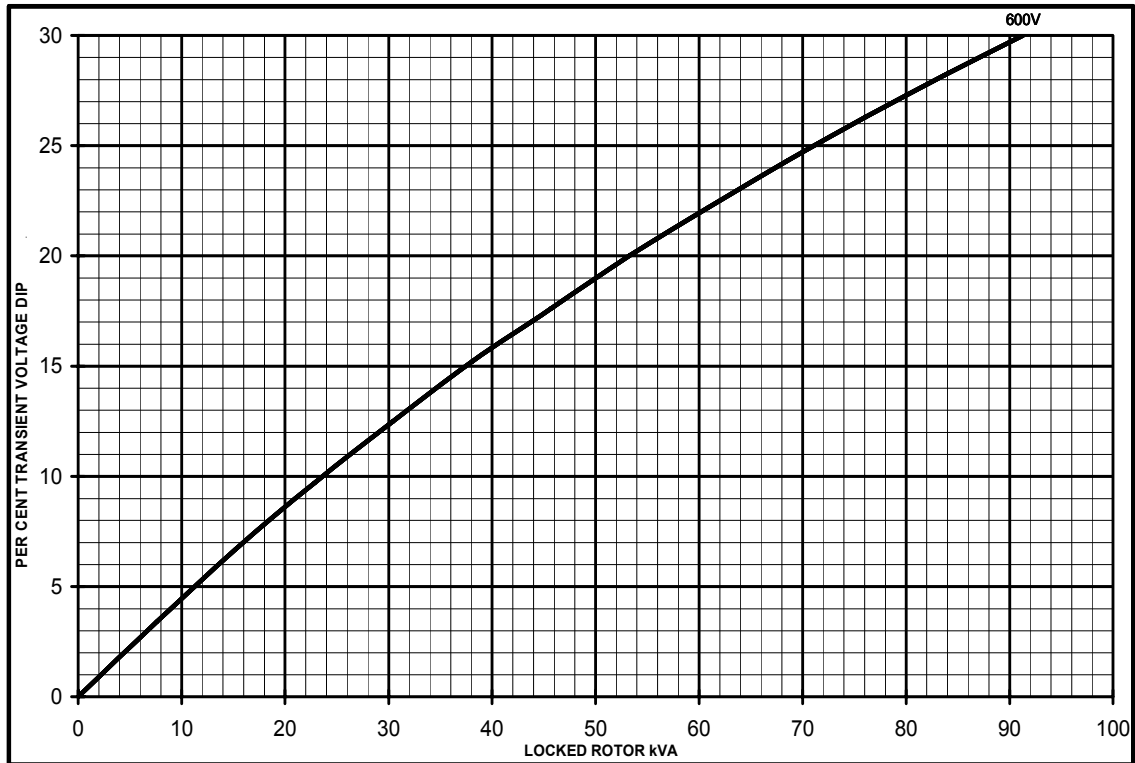


AS480 AVR With EBS

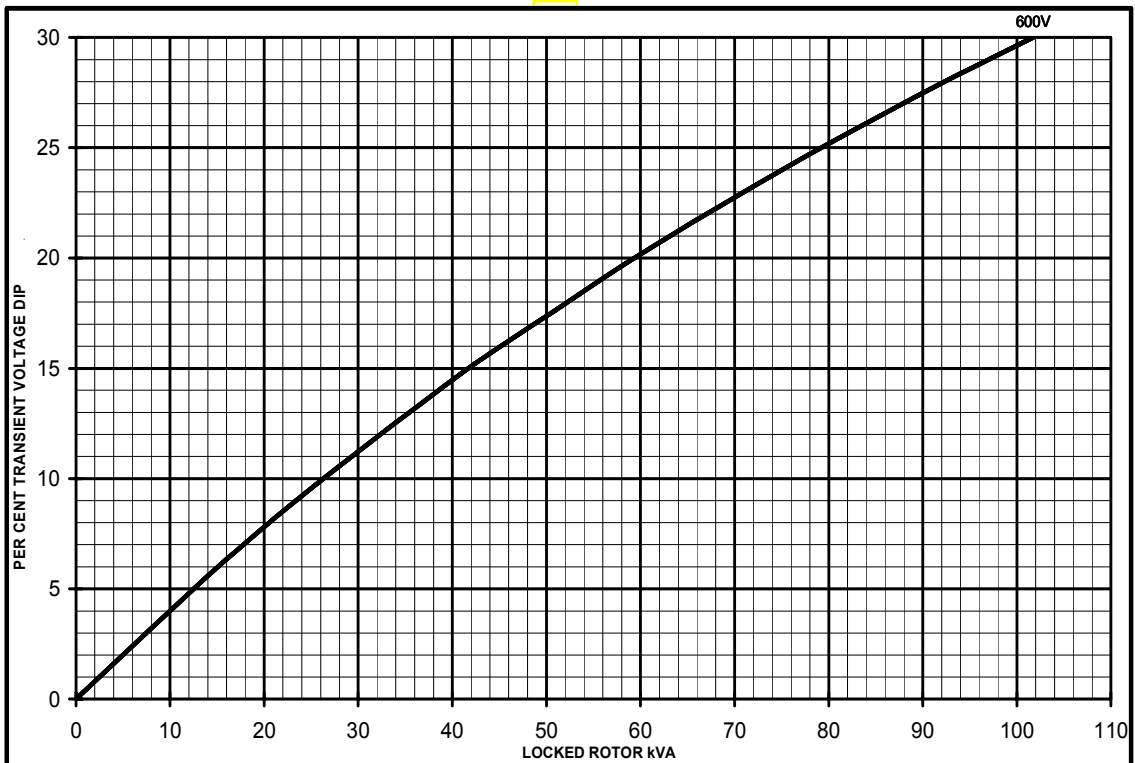

PI144G
Winding 17


STAMFORD

THREE PHASE EFFICIENCY CURVES

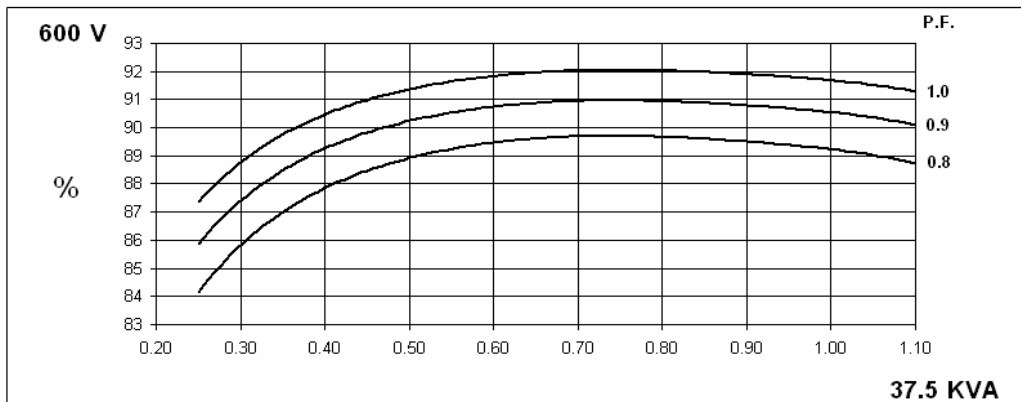

**Three-phase Short Circuit Decrement Curve. No-load Excitation at Rated Speed
Based on star (wye) connection.**

WITH EBS FITTED

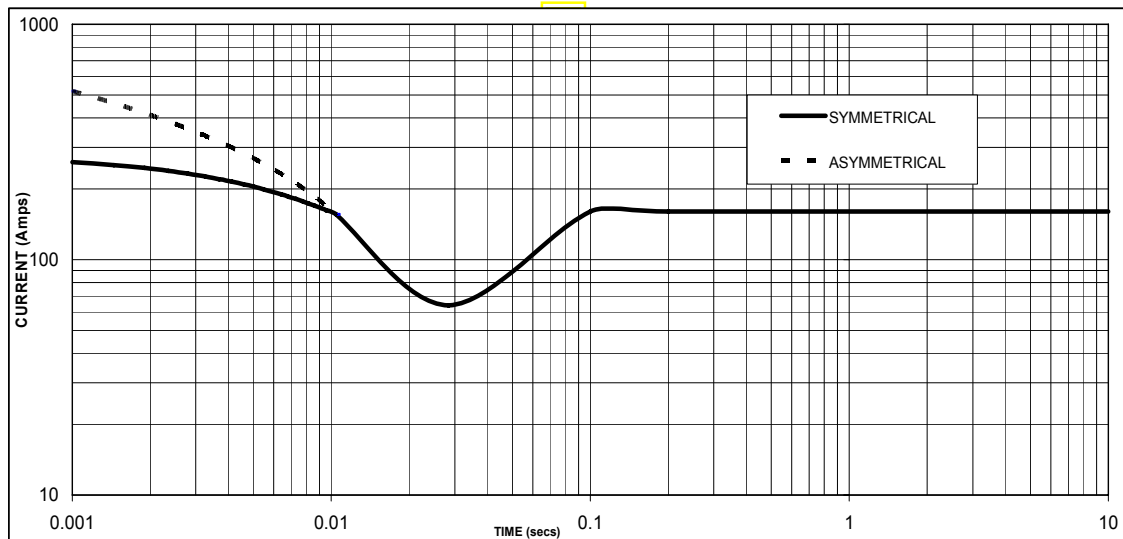

Sustained Short Circuit = 160 Amps

Note

The following multiplication factor should be used to convert the values from curve for the various types of short circuit :

	3-phase	2-phase L-L	1-phase L-N
Instantaneous	x 1.00	x 0.87	x 1.30
Minimum	x 1.00	x 1.80	x 3.20
Sustained	x 1.00	x 1.50	x 2.50
Max. sustained duration	10 sec.	5 sec.	2 sec.

All other times are unchanged

PI144G

STAMFORD


Winding 17 / 0.8 Power Factor

60Hz

RATINGS

Class - Temp Rise	Cont. F - 105/40°C	Cont. H - 125/40°C	Standby - 150/40°C	Standby - 163/27°C
Series Star (V)	600	600	600	600
Parallel Star (V)	300	300	300	300
Series Delta (V)	346	346	346	346
kVA	33.8	37.5	39.4	40.9
kW	27.0	30.0	31.5	32.7
Efficiency (%)	89.5	89.2	89.0	88.8
kW Input	30.2	33.6	35.4	36.8

APPROXIMATE DIMENSIONS

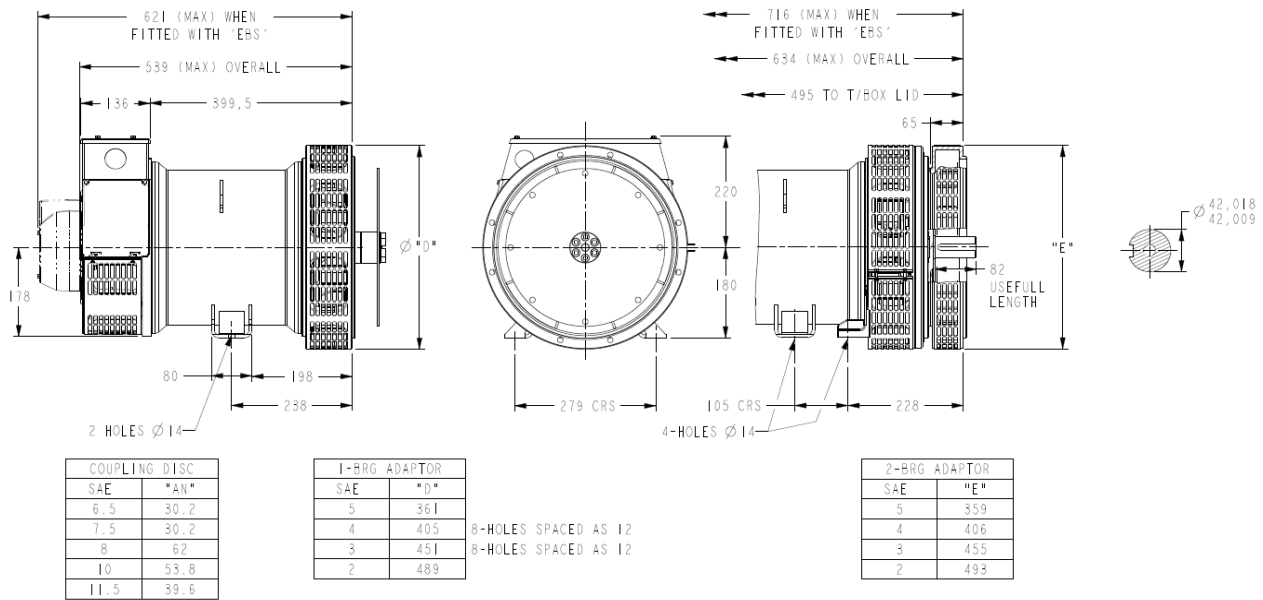

APPROVED DOCUMENT

STAMFORD

Head Office Address:
Barnack Road, Stamford
Lincolnshire, PE9 2NB
United Kingdom
Tel: +44 (0) 1780 484000
Fax: +44 (0) 1780 484100

www.cumminsgeneratortechnologies.com

Copyright 2010, Cummins Generator Technologies Ltd, All Rights Reserved
Stamford and AvK are registered trade marks of Cummins Generator Technologies Ltd
Cummins and the Cummins logo are registered trade marks of Cummins Inc.

PI144G-17-TD-EN-SG-A

DSE7410/20

AUTO START & AUTO MAINS FAILURE MODULES

FEATURES

The DSE7410 is an Auto Start Control Module and the **DSE7420** is an Auto Mains (Utility) Failure Control Module suitable for a wide variety of single, diesel or gas, gen-set applications.

A sophisticated module monitoring an extensive number of engine parameters, the DSE74xx will announce warnings, shutdown and engine status information on the back-lit LCD screen, illuminated LED, remote PC, audible alarm and via SMS text alerts. The module includes RS232, RS485 & Ethernet ports as well as dedicated terminals for system expansion.

The DSE7400 Series modules are compatible with electronic (CAN) and non-electronic (magnetic pick-up/alternator sensing) engines and offer a comprehensive number of flexible inputs, outputs and extensive engine protections so the system can be easily adapted to meet the most demanding industry paralleling requirements.

The modules can be easily configured using the DSE Configuration Suite Software. Selected front panel editing is also available.

ENVIRONMENTAL TESTING STANDARDS

ELECTRO-MAGNETIC COMPATIBILITY

BS EN 61000-6-2
EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4
EMC Generic Emission Standard for the Industrial Environment

ELECTRICAL SAFETY

BS EN 60950
Safety of Information Technology Equipment, including Electrical Business Equipment

TEMPERATURE

BS EN 60068-2-1
Ab/Ae Cold Test -30 °C
BS EN 60068-2-2
Bb/Be Dry Heat +70 °C

VIBRATION

BS EN 60068-2-6
Ten sweeps in each of three major axes
5 Hz to 8 Hz @ +/-7.5 mm,
8 Hz to 500 Hz @ 2 gn

HUMIDITY

BS EN 60068-2-30
Db Damp Heat Cyclic 20/55 °C @ 95% RH 48 Hours
BS EN 60068-2-78
Cab Damp Heat Static 40 °C @ 93% RH 48 Hours


SHOCK

BS EN 60068-2-27
Three shocks in each of three major axes
15 gn in 11 ms

DEGREES OF PROTECTION PROVIDED BY ENCLOSURES

BS EN 60529
IP65 - Front of module when installed into the control panel with the supplied sealing gasket.

COMPREHENSIVE FEATURE LIST TO SUIT A WIDE VARIETY OF GEN-SET APPLICATIONS

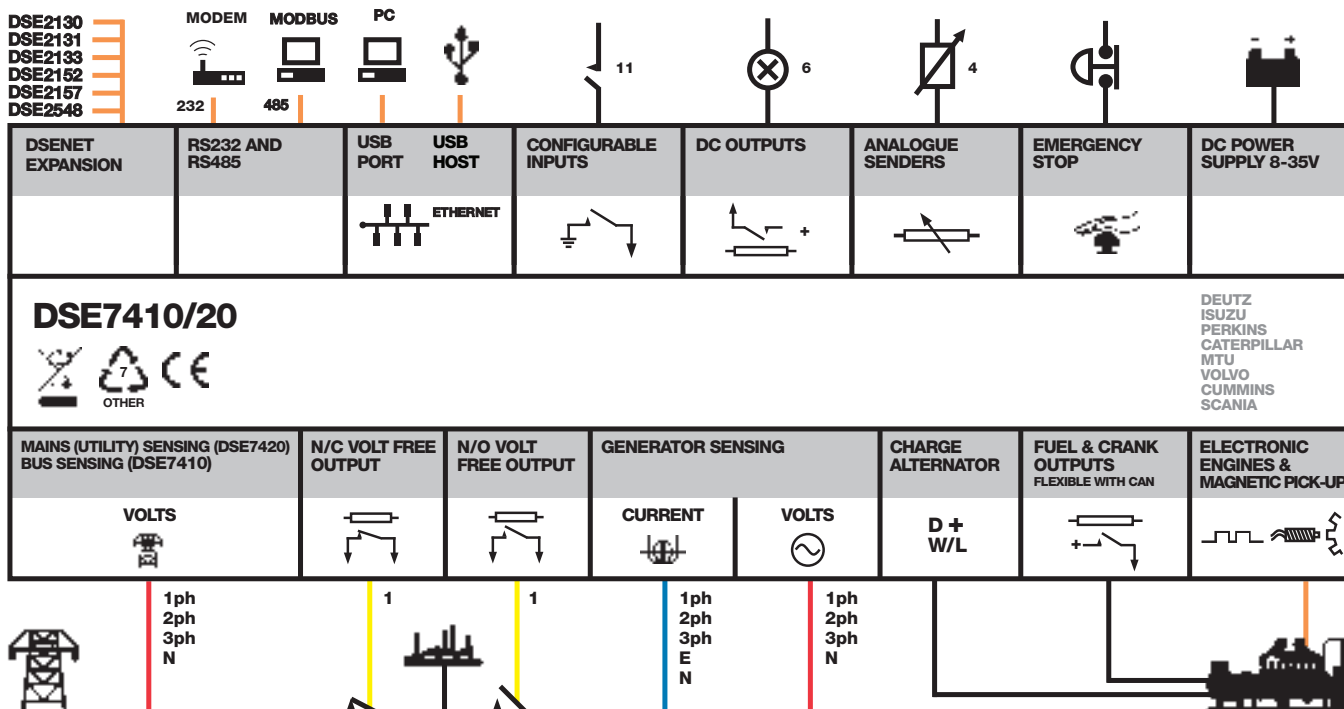

DSE7410/20

AUTO START & AUTO MAINS FAILURE MODULES

FEATURES



DSE7420

DSE7410



KEY FEATURES

- Configurable inputs (11)
- Configurable outputs (8)
- Voltage measurement
- Mains (utility) failure detection
- Dedicated load test button
- kW overload alarms
- Comprehensive electrical protection
- RS232, RS485 & Ethernet remote communications
- Modbus RTU/TCP
- PLC functionality
- Multi event exercise timer
- Back-lit LCD 4-line text display
- Multiple display languages
- Automatic start/Manual start
- Audible alarm
- Fixed and flexible LED indicators
- Event log (250)
- Engine protection
- Fault condition notification to a designated PC
- Front panel mounting
- Protected front panel programming
- Configurable alarms and timers
- Configurable start and stop timers

- Five key menu navigation
- Front panel editing with PIN protection
- 3 configurable maintenance alarms
- CAN and magnetic pick-up/Alt. sensing
- Fuel usage monitor and low fuel alarms
- Charge alternator failure alarm
- Manual speed control (on compatible CAN engines)
- Manual fuel pump control
- "Protections disabled" feature
- Reverse power protection
- Power monitoring (kW h, kV Ar, kV A h, kV Ar h)
- Load switching (load shedding and dummy load outputs)
- Automatic load transfer (DSE7420)
- Unbalanced load protection
- Independent earth fault trip
- Fully configurable via DSE Configuration Suite PC software
- Configurable display languages
- Remote SCADA monitoring via DSE Configuration Suite PC software

- Advanced SMS messaging (additional external modem required)
- Start & stop capability via SMS messaging
- Additional display screens to help with modem diagnostics
- DSENet® expansion
- Integral PLC editor

KEY BENEFITS

- RS232, RS485 & Ethernet can be used at the same time
- DSENet® connection for system expansion
- PLC functionality
- Five step dummy load support
- Five step load shedding support
- High number of inputs and outputs
- Worldwide language support
- Direct USB connection to PC
- Ethernet monitoring
- USB host
- Data logging & trending

RELATED MATERIALS

TITLE

DSE7410 Installation Instructions
DSE7420 Installation Instructions
 DSE74xx Quick Start Guide
 DSE74xx Operator Manual
 DSE74xx PC Configuration Suite Manual

PART NO'S

053-085
 053-088
 057-162
 057-161
 057-160

SPECIFICATION

DC SUPPLY

CONTINUOUS VOLTAGE RATING
 8 V to 35 V Continuous

CRANKING DROPOUTS

Able to survive 0 V for 50 mS, providing supply was at least 10 V before dropout and supply recovers to 5 V. This is achieved without the need for internal batteries

MAXIMUM OPERATING CURRENT

260 mA at 12 V, 130 mA at 24 V

MAXIMUM STANDBY CURRENT

120 mA at 12 V, 65 mA at 24 V

CHARGE FAIL/EXCITATION RANGE

0 V to 35 V

OUTPUTS

OUTPUT A (FUEL)

15 A DC at supply voltage

OUTPUT B (START)

15 A DC at supply voltage

OUTPUTS C & D

8 A AC at 250 V AC (Volt free)

AUXILIARY OUTPUTS E,F,G,H,I & J

2 A DC at supply voltage

GENERATOR

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAINS (UTILITY) (DSE7420)

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

BUS (DSE7410)

VOLTAGE RANGE

15 V to 333 V AC (L-N)

FREQUENCY RANGE

3.5 Hz to 75 Hz

MAGNETIC PICK UP

VOLTAGE RANGE

+/- 0.5 V to 70 V

FREQUENCY RANGE

10,000 Hz (max)

DIMENSIONS

OVERALL

240 mm x 172 mm x 57 mm
 9.4" x 6.8" x 2.2"

PANEL CUTOUT

220 mm x 160 mm
 8.7" x 6.3"

MAXIMUM PANEL THICKNESS

8 mm
 0.3"

STORAGE TEMPERATURE RANGE

-40 °C to +85 °C

DEEP SEA ELECTRONICS PLC UK

Highfield House, Hunmanby Industrial Estate, Hunmanby YO14 0PH
TELEPHONE +44 (0) 1723 890099 **FACSIMILE** +44 (0) 1723 893303
EMAIL sales@deepseapl.com **WEBSITE** www.deepseapl.com

DEEP SEA ELECTRONICS INC USA

3230 Williams Avenue, Rockford, IL 61101-2668 USA
TELEPHONE +1 (815) 316 8706 **FACSIMILE** +1 (815) 316 8708
EMAIL sales@deepseausa.com **WEBSITE** www.deepseausa.com

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0040TFFJNNNNNN



Datasheet creation date: 02/12/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*



Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product

Power Defense Catalog Number	PDG23G0040TFFJNNNNNN
Frame Size	Frame 2
Poles	3 Pole
Voltage	480V AC
Interruption or Breaking Capacity (Icu/Ics)	35kA
Continuous Current Rating (In)	40A
Trip Unit Type	TM Trip Unit
Trip Unit Options 1	Fixed
Trip Unit Options 2	Fixed
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(1) 14 - 1/0
Line Terminal Type	Steel Pressure/Box
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(1) 14 - 1/0
Load Terminal Type	Steel Pressure/Box
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0040TFFJNNNNNN

Technical drawings

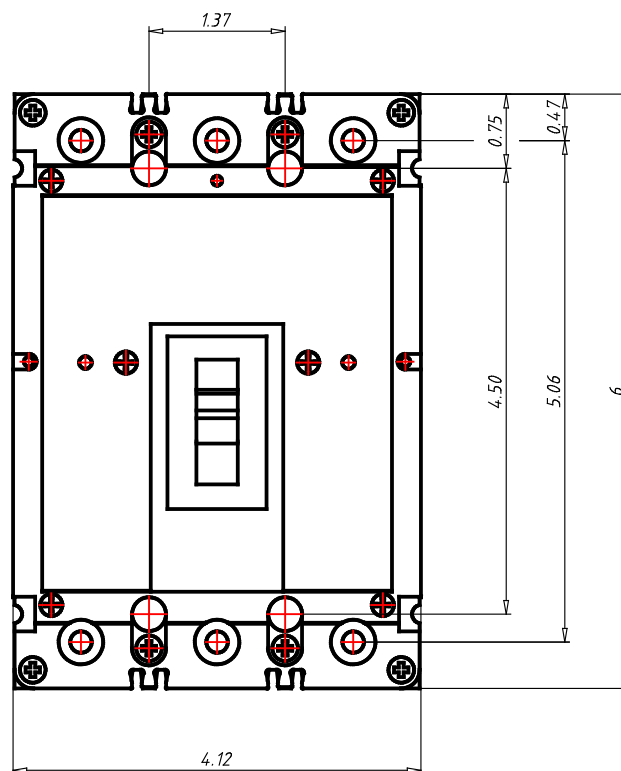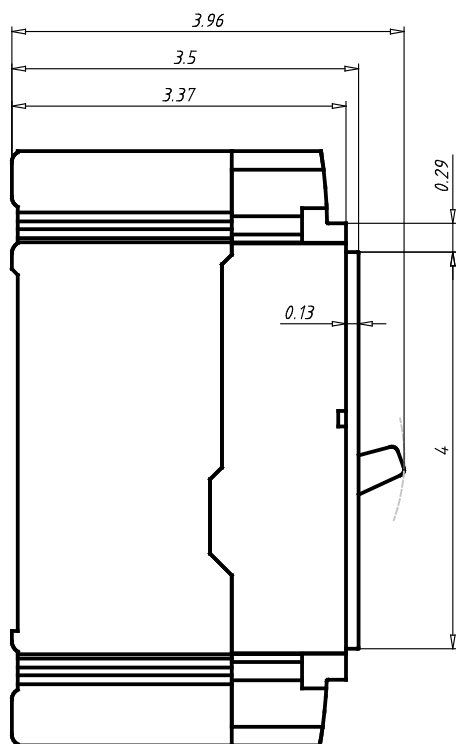

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0040TFFJNNNNNN



Datasheet creation date: 02/12/2019

General Technical Data

Frame Rating (In)	40A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	F / G / K / M / N / P
UL Interruption Rating to UL 489 (240Vac)	35 / 65 / 85 / 100 / 150 / 200kA
UL Interruption Rating to UL 489 (480Vac)	25 / 35 / 50 / 65(a) / 85 / 100kA
UL Interruption Rating to UL 489 (600Vac)	14 / 18 / 22 / 25 / 30 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	10 / 10 / 10 / 22 / 22 / 22kA
UL Current Limiting	N / N / Y / Y / Y / Y
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	35 / 55 / 85 / 100 / 150 / 200kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	35 / 55 / 85 / 100 / 100 / 150kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	25 / 36 / 50 / 70 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	25 / 36 / 50 / 53 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	25 / 30 / 35 / 50 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	20 / 22.5 / 35 / 40 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	15 / 15 / 15 / 15 / 15 / 18kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	- / 8 / 10 / 10 / 10 / 10kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	- / 4 / 5 / 5 / 5 / 5kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	10 / 10 / 10 / 22 / 22 / 22kA
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	10 / 10 / 10 / 22 / 22 / 22kA
Frequency	50/60Hz
Trip Unit Type	TM Trip Unit
Continuous Current Range	Fixed
100% UL489 Rated	
Instantaneous/Short Circuit Range	Fixed
Magnetic/Instantaneous Override	500A
Dimensions H x W x D (inches)	6 x 4.12 x 3.50
Pole to pole distance inches	1,375
Approx Weight lbs	4
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	95%
Derating at 70C	90%

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0050TFFJNNNNNN



Datasheet creation date: 02/12/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*



Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product

Power Defense Catalog Number	PDG23G0050TFFJNNNNNN
Frame Size	Frame 2
Poles	3 Pole
Voltage	480V AC
Interruption or Breaking Capacity (Icu/Ics)	35kA
Continuous Current Rating (In)	50A
Trip Unit Type	TM Trip Unit
Trip Unit Options 1	Fixed
Trip Unit Options 2	Fixed
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(1) 14 - 1/0
Line Terminal Type	Steel Pressure/Box
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(1) 14 - 1/0
Load Terminal Type	Steel Pressure/Box
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0050TFFJNNNNNN

Technical drawings

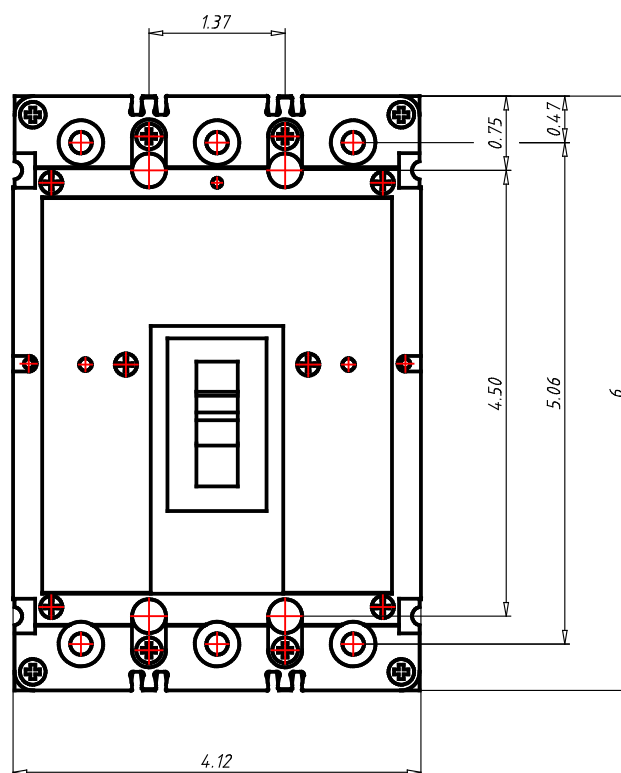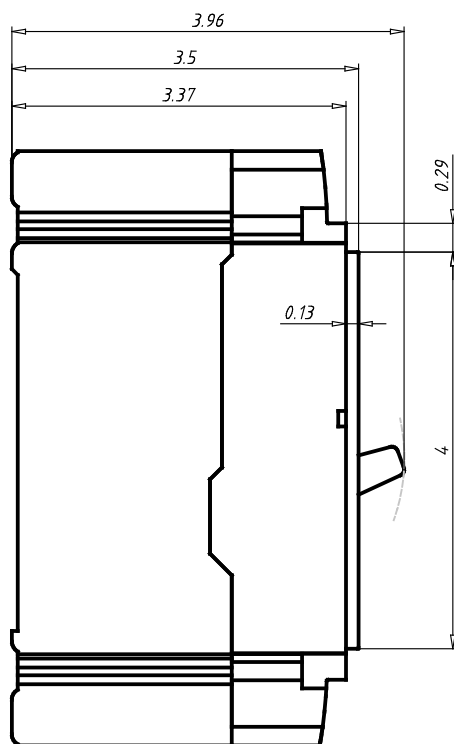

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0050TFFJNNNNNN



Datasheet creation date: 02/12/2019

General Technical Data

Frame Rating (In)	50A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	F / G / K / M / N / P
UL Interruption Rating to UL 489 (240Vac)	35 / 65 / 85 / 100 / 150 / 200kA
UL Interruption Rating to UL 489 (480Vac)	25 / 35 / 50 / 65(a) / 85 / 100kA
UL Interruption Rating to UL 489 (600Vac)	14 / 18 / 22 / 25 / 30 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	10 / 10 / 10 / 22 / 22 / 22kA
UL Current Limiting	N / N / Y / Y / Y / Y
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	35 / 55 / 85 / 100 / 150 / 200kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	35 / 55 / 85 / 100 / 100 / 150kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	25 / 36 / 50 / 70 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	25 / 36 / 50 / 53 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	25 / 30 / 35 / 50 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	20 / 22.5 / 35 / 40 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	15 / 15 / 15 / 15 / 15 / 18kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	- / 8 / 10 / 10 / 10 / 10kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	- / 4 / 5 / 5 / 5 / 5kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	10 / 10 / 10 / 22 / 22 / 22kA
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	10 / 10 / 10 / 22 / 22 / 22kA
Frequency	50/60Hz
Trip Unit Type	TM Trip Unit
Continuous Current Range	Fixed
100% UL489 Rated	
Instantaneous/Short Circuit Range	Fixed
Magnetic/Instantaneous Override	600A
Dimensions H x W x D (inches)	6 x 4.12 x 3.50
Pole to pole distance inches	1,375
Approx Weight lbs	4
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	95%
Derating at 70C	90%

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0100TFFJNNNNNN



Datasheet creation date: 02/12/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*



Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product

Power Defense Catalog Number	PDG23G0100TFFJNNNNNN
Frame Size	Frame 2
Poles	3 Pole
Voltage	480V AC
Interruption or Breaking Capacity (Icu/Ics)	35kA
Continuous Current Rating (In)	100A
Trip Unit Type	TM Trip Unit
Trip Unit Options 1	Fixed
Trip Unit Options 2	Fixed
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(1) 14 - 1/0
Line Terminal Type	Steel Pressure/Box
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(1) 14 - 1/0
Load Terminal Type	Steel Pressure/Box
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0100TFFJNNNNNN

Technical drawings

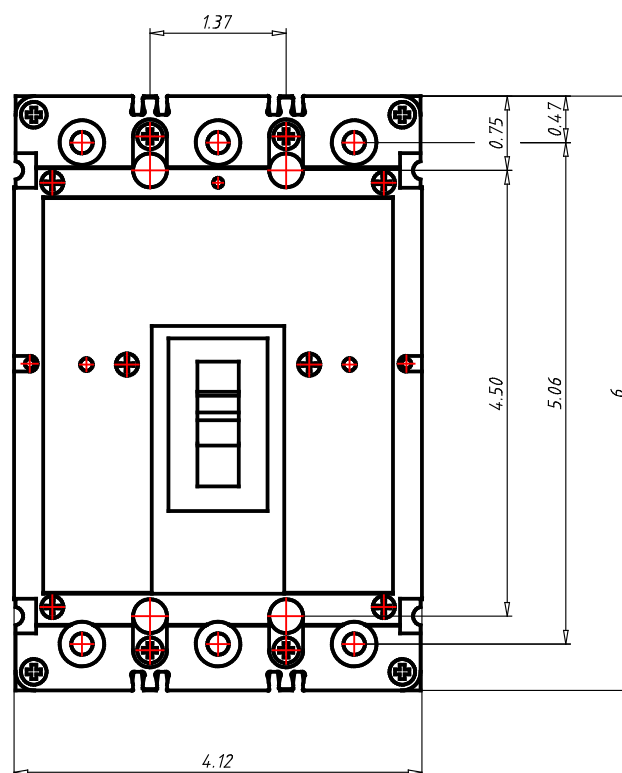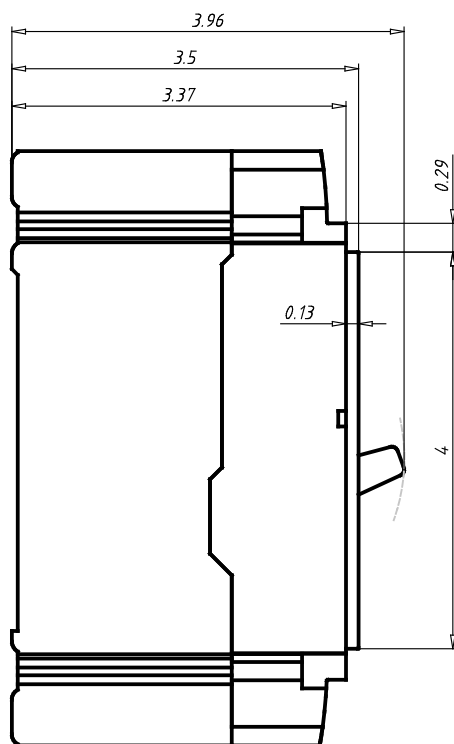

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0100TFFJNNNNNN



Datasheet creation date: 02/12/2019

General Technical Data

Frame Rating (In)	100A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	F / G / K / M / N / P
UL Interruption Rating to UL 489 (240Vac)	35 / 65 / 85 / 100 / 150 / 200kA
UL Interruption Rating to UL 489 (480Vac)	25 / 35 / 50 / 65(a) / 85 / 100kA
UL Interruption Rating to UL 489 (600Vac)	14 / 18 / 22 / 25 / 30 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	10 / 10 / 10 / 22 / 22 / 22kA
UL Current Limiting	N / N / Y / Y / Y / Y
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	35 / 55 / 85 / 100 / 150 / 200kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	35 / 55 / 85 / 100 / 100 / 150kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	25 / 36 / 50 / 70 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	25 / 36 / 50 / 53 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	25 / 30 / 35 / 50 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	20 / 22.5 / 35 / 40 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	15 / 15 / 15 / 15 / 15 / 18kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	- / 8 / 10 / 10 / 10 / 10kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	- / 4 / 5 / 5 / 5 / 5kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	10 / 10 / 10 / 22 / 22 / 22kA
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	10 / 10 / 10 / 22 / 22 / 22kA
Frequency	50/60Hz
Trip Unit Type	TM Trip Unit
Continuous Current Range	Fixed
100% UL489 Rated	
Instantaneous/Short Circuit Range	Fixed
Magnetic/Instantaneous Override	700A
Dimensions H x W x D (inches)	6 x 4.12 x 3.50
Pole to pole distance inches	1,375
Approx Weight lbs	4
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	95%
Derating at 70C	90%

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0125TFFJNNNNNN



Datasheet creation date: 02/12/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*



Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product

Power Defense Catalog Number	PDG23G0125TFFJNNNNNN
Frame Size	Frame 2
Poles	3 Pole
Voltage	480V AC
Interruption or Breaking Capacity (Icu/Ics)	35kA
Continuous Current Rating (In)	125A
Trip Unit Type	TM Trip Unit
Trip Unit Options 1	Fixed
Trip Unit Options 2	Fixed
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(1) 4 - 4/0
Line Terminal Type	Aluminum
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(1) 4 - 4/0
Load Terminal Type	Aluminum
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0125TFFJNNNNNN

Technical drawings

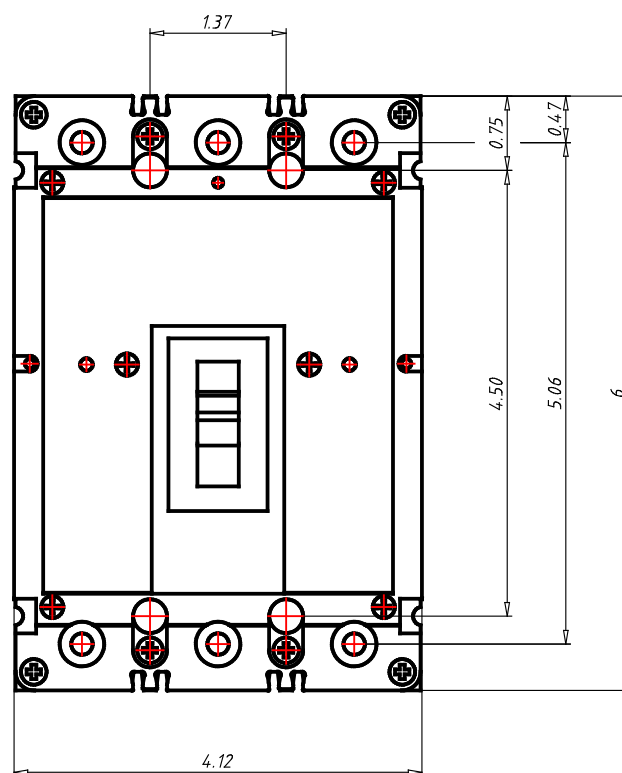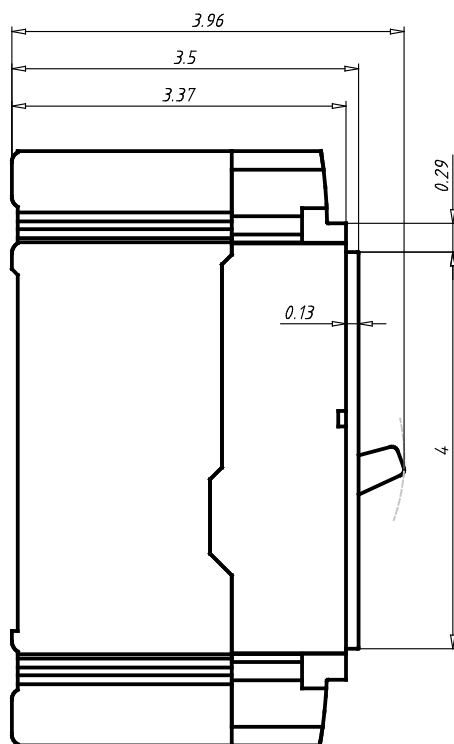

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0125TFFJNNNNNN



Datasheet creation date: 02/12/2019

General Technical Data

Frame Rating (In)	125A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	F / G / K / M / N / P
UL Interruption Rating to UL 489 (240Vac)	35 / 65 / 85 / 100 / 150 / 200kA
UL Interruption Rating to UL 489 (480Vac)	25 / 35 / 50 / 65(a) / 85 / 100kA
UL Interruption Rating to UL 489 (600Vac)	14 / 18 / 22 / 25 / 30 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	10 / 10 / 10 / 22 / 22 / 22kA
UL Current Limiting	N / N / Y / Y / Y / Y
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	35 / 55 / 85 / 100 / 150 / 200kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	35 / 55 / 85 / 100 / 100 / 150kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	25 / 36 / 50 / 70 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	25 / 36 / 50 / 53 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	25 / 30 / 35 / 50 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	20 / 22.5 / 35 / 40 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	15 / 15 / 15 / 15 / 15 / 18kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	- / 8 / 10 / 10 / 10 / 10kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	- / 4 / 5 / 5 / 5 / 5kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	10 / 10 / 10 / 22 / 22 / 22kA
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	10 / 10 / 10 / 22 / 22 / 22kA
Frequency	50/60Hz
Trip Unit Type	TM Trip Unit
Continuous Current Range	Fixed
100% UL489 Rated	
Instantaneous/Short Circuit Range	Fixed
Magnetic/Instantaneous Override	800A
Dimensions H x W x D (inches)	6 x 4.12 x 3.50
Pole to pole distance inches	1,375
Approx Weight lbs	4
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	95%
Derating at 70C	90%

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0150TFFJNNNNNN



Datasheet creation date: 21/11/2019

PRODUCT VIEW *(Use Mouse to Rotate and Zoom)*



Eaton's Power Defense™ molded case circuit breakers, a globally rated platform designed to help keep your power system safe with latest protection technology. Engineered for the future: IoT and Industry 4.0 features such as built-in communications, advanced energy metering, and algorithms that signal breaker maintenance; zone selective interlock technology that clears faults quickly and locally; ArcFlash reduction options that help protect your people, and not to mention Eaton's best-in-class support and service.

Tech Data for Configured Product

Power Defense Catalog Number	PDG23G0150TFFJNNNNNN
Frame Size	Frame 2
Poles	3 Pole
Voltage	480V AC
Interruption or Breaking Capacity (Icu/Ics)	35kA
Continuous Current Rating (In)	150A
Trip Unit Type	TM Trip Unit
Trip Unit Options 1	Fixed
Trip Unit Options 2	Fixed
Indicating Accessories	None
Indicating Accessories Terminal	None
Tripping Accessories	None
Tripping Accessory Terminal	None
Tripping Accessory Voltage	None
Line Type Description	Option 1 - Standard Terminal
Line Conductor Options	(1) 4 - 4/0
Line Terminal Type	Aluminum
Load Type Description	Option 1 - Standard Terminal
Load Conductor Options	(1) 4 - 4/0
Load Terminal Type	Aluminum
Special Options - Type of Modification	None
Details	None
Additional Description	None

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0150TFFJNNNNNN

Technical drawings

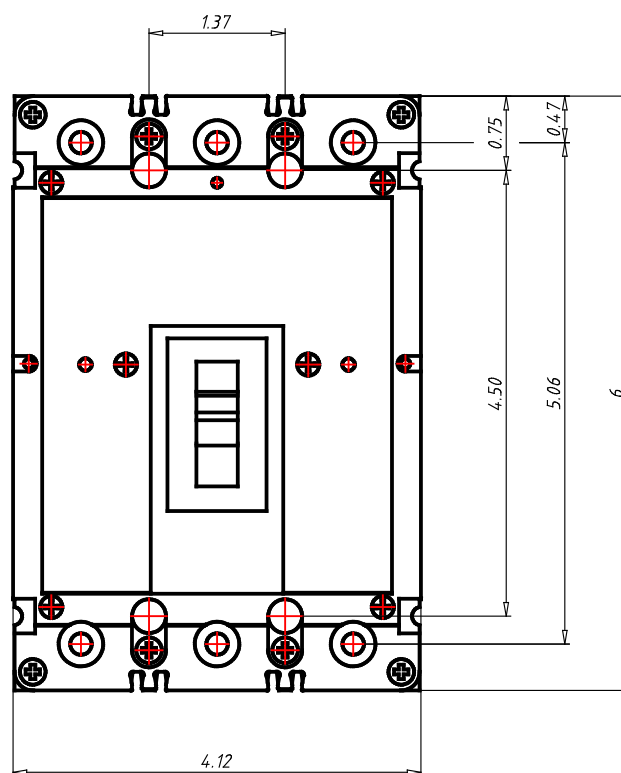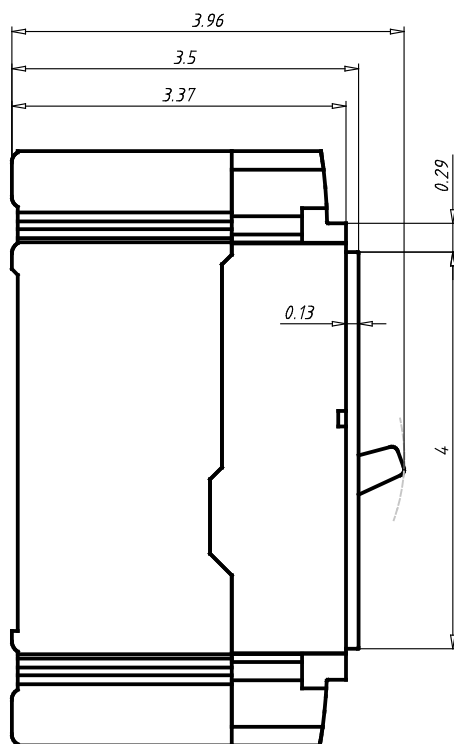

Molded Case Circuit Breakers
Power Defense™ UL Global Series
Part Number: PDG23G0150TFFJNNNNNN



Datasheet creation date: 21/11/2019

General Technical Data

Frame Rating (In)	150A
Reference Standard	UL489, CSA 22.2, IEC 60947-2 & GB
Number of poles	3
Neutral rating	-
Interruption Rating Designator	F / G / K / M / N / P
UL Interruption Rating to UL 489 (240Vac)	35 / 65 / 85 / 100 / 150 / 200kA
UL Interruption Rating to UL 489 (480Vac)	25 / 35 / 50 / 65(a) / 85 / 100kA
UL Interruption Rating to UL 489 (600Vac)	14 / 18 / 22 / 25 / 30 / 35kA
UL Interruption Rating to UL 489 (125/250Vdc)	10 / 10 / 10 / 22 / 22 / 22kA
UL Current Limiting	N / N / Y / Y / Y / Y
Rated breaking capacity to IEC 60947-2 (220-240 Vac Icu)	35 / 55 / 85 / 100 / 150 / 200kA
Rated breaking capacity to IEC 60947-2 (220-240 Vac Ics)	35 / 55 / 85 / 100 / 100 / 150kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Icu)	25 / 36 / 50 / 70 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (380-415 Vac Ics)	25 / 36 / 50 / 53 / 70 / 70kA
Rated breaking capacity to IEC 60947-2 (440 Vac Icu)	25 / 30 / 35 / 50 / 70 / 100kA
Rated breaking capacity to IEC 60947-2 (440 Vac Ics)	20 / 22.5 / 35 / 40 / 50 / 65kA
Rated breaking capacity to IEC 60947-2 (525 Vac Icu)	
Rated breaking capacity to IEC 60947-2 (525 Vac Ics)	15 / 15 / 15 / 15 / 15 / 18kA
Rated breaking capacity to IEC 60947-2 (690 Vac Icu)	- / 8 / 10 / 10 / 10 / 10kA
Rated breaking capacity to IEC 60947-2 (690 Vac Ics)	- / 4 / 5 / 5 / 5 / 5kA
Rated breaking capacity to IEC 60947-2 (125V DC Icu)	10 / 10 / 10 / 22 / 22 / 22kA
Rated breaking capacity to IEC 60947-2 (250V DC 2P in series Ics)	10 / 10 / 10 / 22 / 22 / 22kA
Frequency	50/60Hz
Trip Unit Type	TM Trip Unit
Continuous Current Range	Fixed
100% UL489 Rated	
Instantaneous/Short Circuit Range	Fixed
Magnetic/Instantaneous Override	800A
Dimensions H x W x D (inches)	6 x 4.12 x 3.50
Pole to pole distance inches	1,375
Approx Weight lbs	4
RoHS Compliance	Yes
UL File Number	E7819
Ambient Temp Calibration	
Derating at 50C	
Derating at 60C	95%
Derating at 70C	90%

1. 480Vac corresponds to 277Vac for 1P
2. 600Vac corresponds to 347Vac for 1P

GUEST® Genset Chargers



Guest chargers are proven performers in genset applications. For specific application information, or if you are developing a new product, be sure to consult with the Guest applications engineering team to ensure the correct charger is specified.

Genset Chargers

MODEL	TOTAL AMPS	OUT-PUTS	AMPS PER OUTPUT	BATTERY SYSTEM	INPUT VOLTAGE	AC	DC	DIMENSIONS	WT. (LBS)	AGENCY LISTING
2602A-12	2	1	2	12V	100 - 130 50/60Hz	6' w/ Connect-Charge plug	4' w/ ring terminals	2.9" x 5.1" x 1.5"	2	UL
2602A-12-B (bulk)										
2605A-1-24RT-01 (bulk pack only) (1)	5	1	5	24V	100 - 130 50/60Hz	6' SJT 18-3 w/ Connect-Charge plug	6' SJT 18-3 w/ ring terminals	7.4" x 6.3" x 2.4"	4.5	UL
2608A-B-01 (bulk pack only) (1)	6	1	6	12V	100 - 130 50/60Hz	6' cable w/ molded plug rated -40 to 105C	4' w/ ring terminals rated -40 to 105C	3.5" x 6.4" x 2.3"	4	UL
2610A	10	2	5/5	12V+12V	100 - 130 50/60Hz	Studs	Studs	5.5" x 7.8" x 2.4"	5.6	—
2610A-B (bulk)										UL (bulk only)

(1) 2-stage charging



Individual agency listings as shown in product chart.

Plastic Magna Seal Air Cleaners

Internal or External Evacuator Valve



High Strength Polymer

Working Temp -40c to +80c (-40F to 176F)


Design Compatibility with other Manufacturers

Industry Standard elements

Can be Mounted Vertical or Horizontal

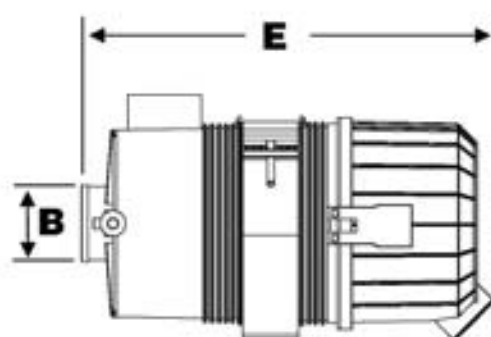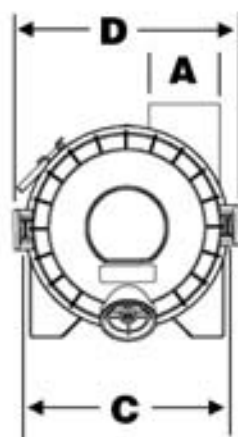

**Type 1
Straight Outlet**




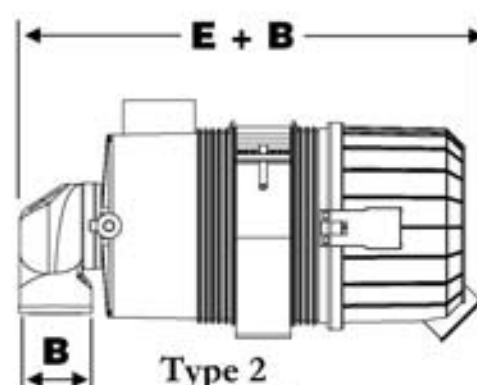


**Type 2
90° Outlet**

Air Cleaner Assembly

Model Number	Part Number	Type	Initial Restriction						A		B		C		D		E	
			6" H2O		8" H2O		10" H2O		OD Inlet		OD Outlet							
			CFM	M3m	CFM	M3m	CFM	M3m	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm
2s-FW-E1	68110	1	75	2.1	90	2.5	105	3.0	2.00	51	1.75	45	4.8	122	6.14	156	8.98	228
2s-FW-E2	68111	1	65	1.8	75	2.1	85	2.4	2.00	51	1.75	45	4.80	122	6.14	156	8.98	228
2s-FW-E1-90	68103	2	63	1.7	73	2.0	82	2.3	2.00	51	1.75	45	4.80	122	6.14	156	10.43	265
2s-FW-E2-90	68107	2	53	1.5	63	1.8	71	2.0	2.00	51	1.75	45	4.80	122	6.14	156	10.43	265
2-FW-E1	68120	1	100	2.8	115	3.3	130	3.7	2.00	51	2.00	51	5.75	146	7.09	180	13.39	340
2-FW-E2	68130	1	90	2.5	105	3.0	115	3.3	2.00	51	2.00	51	5.75	146	7.09	180	13.39	340
2-FW-E1-90	68116	2	88	2.4	102	2.9	113	3.2	2.00	51	2.00	51	5.75	146	7.09	180	14.96	380
2-FW-E2-90	68127	2	77	2.2	92	2.6	103	2.9	2.00	51	2.00	51	5.75	146	7.09	180	14.96	380
2.5-FW-E1	68132	1	150	4.2	175	5.0	195	5.5	2.50	63.5	2.50	63.5	6.89	175	8.15	207	14.13	359
2.5-FW-E2	68133	1	145	4.1	165	4.7	185	5.2	2.50	63.5	2.50	63.5	6.89	175	8.15	207	14.13	359
2.5-FW-E1-90	68131	2	134	3.8	156	4.4	175	5.0	2.50	63.5	2.50	63.5	6.89	175	8.15	207	16.22	412
2.5-FW-E2-90	68134	2	127	3.6	148	4.2	168	4.7	2.50	63.5	2.50	63.5	6.89	175	8.15	207	16.22	412
3-FW-E1	68140	1	160	4.5	190	5.4	210	5.9	3.00	76	3.00	76	7.24	184	8.58	218	14.57	370
3-FW-E2	68150	1	150	4.2	170	4.8	190	5.4	3.00	76	3.00	76	7.24	184	8.58	218	14.57	370
3-FW-E1-90	68140-2	2	154	4.4	181	5.1	196	5.6	3.00	76	3.00	76	7.24	184	8.58	218	17.80	452
3-FW-E2-90	68150-2	2	138	4.0	162	4.6	182	5.2	3.00	76	3.00	76	7.24	184	8.58	218	17.80	452
3.75-FW-E1	68160	1	250	7.1	290	8.4	325	9.2	3.75	95	3.50	89	8.35	212	9.72	247	15.63	397
3.75-FW-E2	68170	1	225	6.4	260	7.4	280	7.9	3.75	95	3.50	89	8.35	212	9.72	247	15.63	397
3.75-FW-E1-90	68157	2	212	6.0	250	7.1	277	7.8	3.75	95	3.50	89	8.35	212	9.72	247	18.5	470
3.75-FW-E2-90	68167	2	188	5.3	220	6.2	250	7.1	3.75	95	3.50	89	8.35	212	9.72	247	18.5	470
4.5-FW-E1	68175	1	375	10.6	425	12.0	475	13.5	4.50	114	4.00	102	10.60	268	11.9	302	19.13	486
4.5-FW-E2	68175-1	1	325	9.2	375	10.6	425	12.0	4.50	114	4.00	102	10.60	268	11.9	302	19.13	486
6-FW-E1	68178	1	600	17.0	685	19.4	770	21.8	6.00	152	5.00	127	12.20	309	13.54	344	22.00	560
6-FW-E2	68179	1	500	14.2	565	16.0	630	17.8	6.00	152	5.00	127	12.20	309	13.54	344	22.00	560
7-FW-E1	68182	1	800	22.7	910	25.8	1060	30.0	7.00	178	6.00	152	15.50	394	16.80	427	21.50	545
7-FW-E2	68185	1	710	20.1	830	23.5	960	27.2	7.00	178	6.00	152	15.50	394	16.80	427	21.50	545


OUTLINE DIMENSIONS FOR SPJD 25 THRU 30 KW OPEN

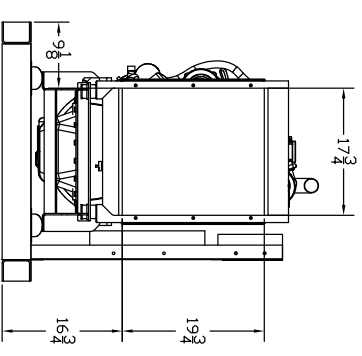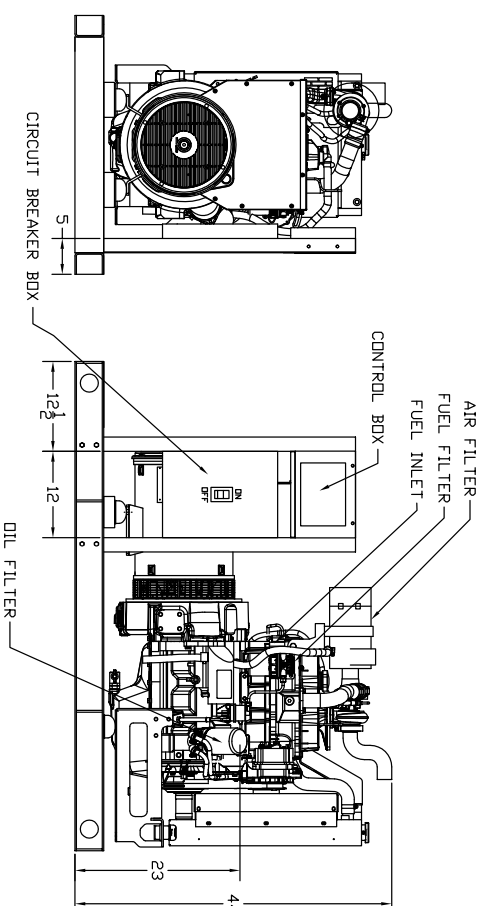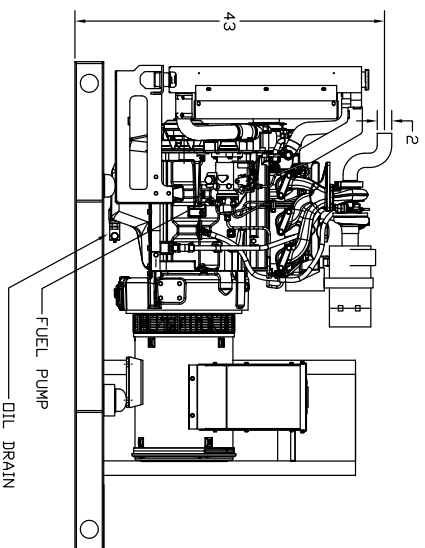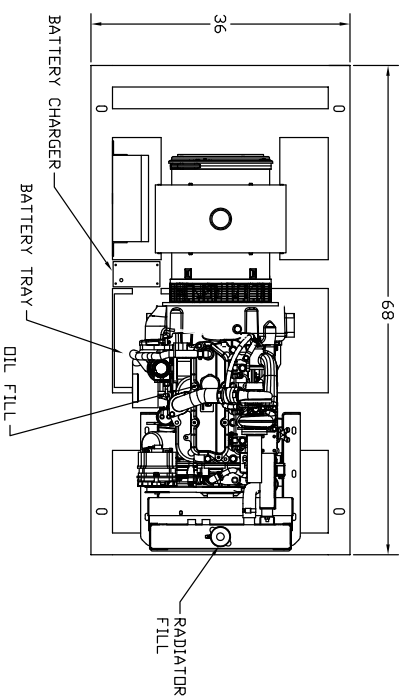



OUTLINE DIMENSIONS FOR 20 THRU 30 KW LEVEL 2 ENCLOSURE (HINGED DOORS)

TOP VIEW


(GEN-SET HAS (4) DOORS, (2) SHOWN OPEN ARE TYPICAL FOR BOTH SIDES)

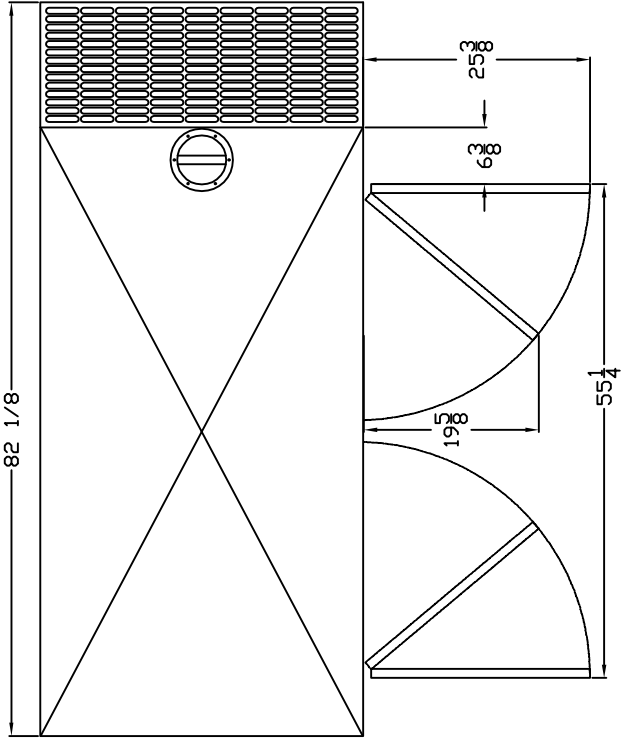


FRAME VIEW

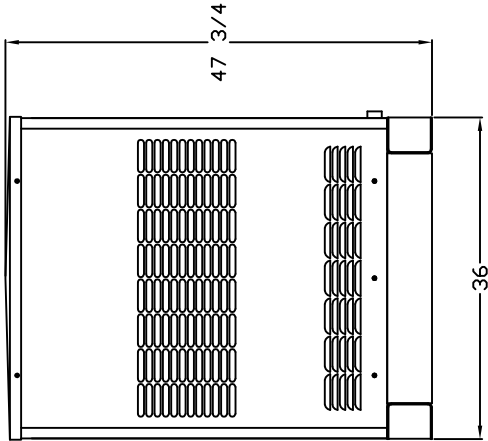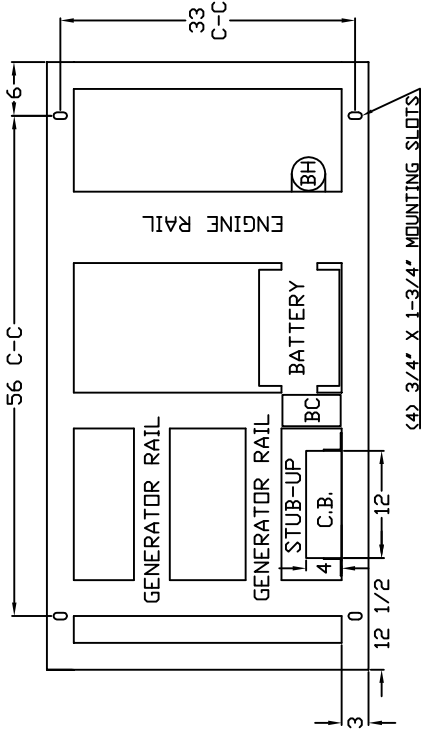

GENERATOR END VIEW

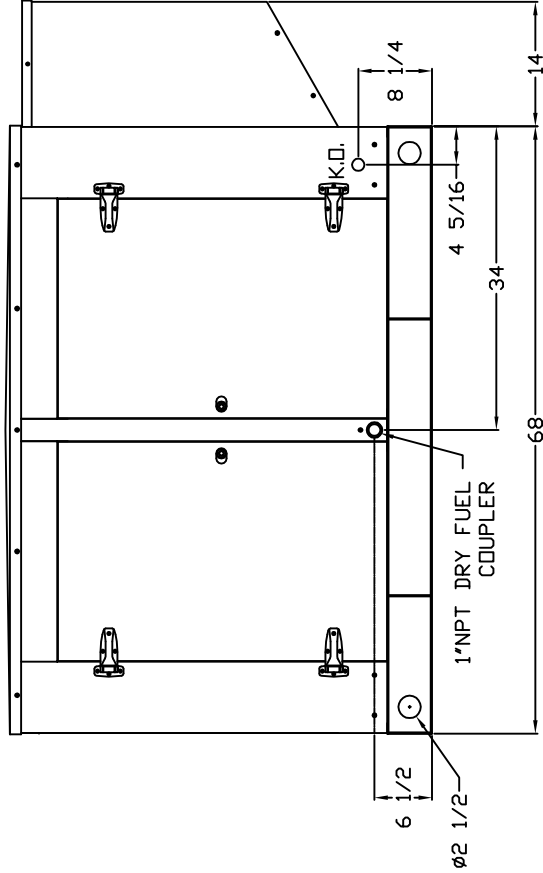

SIDE VIEW

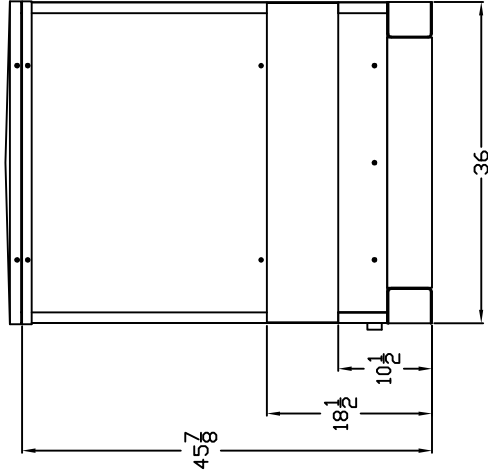

RADIATOR END VIEW