



GILLETTE GENERATORS


LIQUID COOLED DIESEL ENGINE GENERATOR SET

MODEL
PJD-1550
60 HERTZ

Model	HZ	STANDBY 150°C RISE
	60	155
PJD-1550-60 HERTZ		

STANDARD FEATURES

- All generator sets are USA prototype built and thoroughly tested. Production models are USA factory built and 100% load tested.
- All generator sets meet NFPA-110. Level 1, when equipped with the necessary accessories and installed per NFPA standards.
- All generators are UL-1446 certified.
- Solid state, frequency compensated voltage regulation is standard on all gen-sets.
- Electronic governor for precise frequency regulation.
- Deep Sea “7420” digital controller allows programming to basic engine functions in the field. Controller has stop-manual-auto mode and engine shutdowns, signaled by LCD indicators.
- All generator set control systems components and accessories provide a 1-year limited warranty at time of initial start-up. Generators and engines are governed by separate warranties.
- PJD Generator Sets: There is no enclosure, so gen-set must be placed within a weather protected area, un-inhabited by humans or animals, with proper ventilation. Silencer not supplied, as installation requirements are not known. However, this item is available as optional equipment.
- PJD Frame: The frame is designed to be as wide as the gen-sets radiator, so that the gen-set can fit within a standard 36” wide doorway.

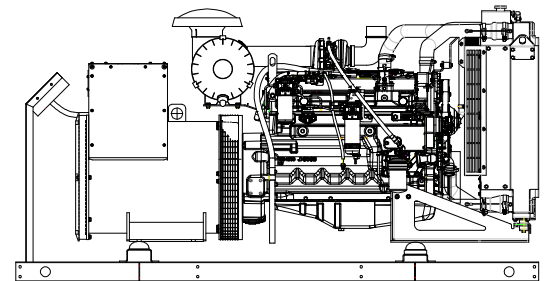

PJD GEN-SET

GENERATOR RATINGS

GENERATOR MODEL	VOLTAGE		PH	HZ	150°C RISE STANDBY RATING		POWER LEAD CONNECTIONS
	L-N	L-L			KW/KVA	AMP	
PJD-1550-1-1	120	240	1	60	155/155	646	4 LEAD DEDICATED 1 PH
PJD-1550-3-2	120	208	3	60	155/193.8	538	12 LEAD LOW WYE
PJD-1550-3-3	120	240	3	60	155/193.8	466	12 LEAD HIGH DELTA
PJD-1550-3-4	277	480	3	60	155/193.8	233	12 LEAD HIGH WYE

RATINGS: All single phase gen-sets are dedicated 4 lead windings, rated at unity (1.0) power factor. All three phase gen-sets are 12 lead windings, rated at .8 power factor. 150° C “STANDBY RATINGS” are strictly for gen-sets that are used for back-up emergency power to a failed normal utility power source. This standby rating allows varying loads, with no overload capability, for the entire duration of utility power outage. All gen-set power ratings are based on temperature rise measured by resistance method as defined by MIL-STD 705C and IEEE STD 115, METHOD 6.4.4. All generators have class H (180°C) insulation system on both rotor and stator windings. All factory tests and KW/KVA charts shown above are based 150°C (standby), R/R winding temperature, within a maximum 40°C ambient condition. Generators operated at standby power ratings must not exceed the temperature rise limitation for class H insulation system, as specified in NEMA MG1-22.40. Specifications & ratings are subject to change without prior notice.

APPLICATION AND ENGINEERING DATA FOR MODEL PJD-1550-60 HZ

GENERATOR SPECIFICATIONS

Manufacturer Stamford Electric Generators
Model & Type UCI274G-06, 4 Pole, 4 Lead, Single Phase
..... UCI274G-311, 4 Pole, 12 Lead, 208V, Three Phase
..... UCI27F-311, 4 Pole, 12 Lead, 480V, Three Phase
Exciter Brushless, shunt excited
Voltage Regulator Solid State, HZ/Volts
Voltage Regulation ½%, No load to full load
Frequency 60 HZ
Frequency Regulation ± ½% (1/2 cycle, no load to full load)
Unbalanced Load Capability 100% of standby amps
Total Stator and Load Insulation Class H, 180°C
Temperature Rise 150°C R/R, standby rating @ 40°C amb.
1 Ø Motor Starting @ 30% Voltage Dip (240V) 395 kVA
3 Ø Motor Starting @ 30% Voltage Dip (208-240V) 435 kVA
3 Ø Motor Starting @ 30% Voltage Dip (480V) 520 kVA
Bearing 1, Pre-lubed and sealed
Coupling Direct flexible disc
Total Harmonic Distortion Max 3½% (MIL-STD705B)
Telephone Interference Factor Max 50 (NEMA MG1-22)
Deviation Factor Max 5% (MIL-STD 405B)
Ltd. Warranty Period 24 Months from start-up date or
..... 1000 hours use, first to occur

GENERATOR FEATURES

- World Renown Stamford Electric Generator having UL-1446 certification.
- Full generator protection with **Deep Sea “7420”** controller, having UL-508 certification.
- Automatic voltage regulator with over-excitation, under-frequency compensation, under-speed protection, and EMI filtering. Entire solid-state board is encapsulated for moisture protection.
- Generator power ratings are based on temperature rise, measured by resistance method, as defined in MIL-STD 705C and IEEE STD 115, Method 6.4.4.
- Power ratings will not exceed temperature rise limitation for class H insulation as per NEMA MG1-22.40.
- Insulation resistance to ground, exceeds 1.5 meg-ohm.
- Stator receives 2000 V. hi-potential test on main windings, and rotor windings receive a 1500 V. hi-potential test, as per MIL-STD 705B.
- Full amortisseur windings with UL-1446 certification.
- Complete engine-generator torsional acceptance, confirmed during initial prototype testing.
- Full load testing on all engine-generator sets, before shipping.
- Self ventilating and drip-proof & revolving field design

ENGINE SPECIFICATIONS AND APPLICATIONS DATA

ENGINE

Manufacturer John Deere
Model and Type 6068HF285, 4 cycle, liquid Cooled
Aspiration Turbocharged
Charged Air Cooled System Air to Air
Cylinder Arrangement 6 Cylinders, In-Line
Displacement Cu. In. (Liters) 415 (6.8)
Bore & Stroke In. (Cm.) 4.19 x 5 (10.6 x 12.7)
Compression Ratio 19.0:1
Main Bearings & Style Tin-Aluminum, Babbitt
Cylinder Head Cast Iron
Pistons 6, Aluminum Alloy
Crankshaft Forged Chrome Steel
Exhaust Valve Forged Heat Resistant Steel
Governor JDEC Electronic L16 DENSO HP3
Frequency Regulation ± 1/4%
Air Cleaner Dry, Replaceable Cartridge
Engine Speed 1800 rpm
Max Power, bhp (kwm) Standby 237 (177)
BMEP: psi (kpa) Standby 252 (1735)
Ltd. Warranty Period 24 months or 2000 hrs, first to occur

FUEL SYSTEM

Type Diesel Fuel Oil (ASTM No. 2-D)
Combustion System Direct Injection
Fuel Injection Pump Stanadyne Rotary Type
12 VDC air intake heaters Standard Equipment
Fuel Filter and Water Separator Yes

FUEL CONSUMPTION

GAL/HR (LITER/HR)	STANDBY
100% LOAD	12.1 (45.8)
75% LOAD	9.4 (35.6)
50% LOAD	6.2 (23.5)

OIL SYSTEM

Type Full Pressure
Oil Pan Capacity qt. (L) 25 (23.9)
Oil Pan Cap. W/ filter qt. (L) 26 (24.6)
Oil Filter 1, Replaceable Spin-On

ELECTRICAL SYSTEM

Ignition System Electronic
Eng. Alternator/Starter: 12 VDC, negative ground, 65 amp/hr.
Recommended Battery to -18°C (0°F): ... 12 VDC, Size BCI# 27,
Max Dimensions: 12" lg X 6 3/4" wi X 9" hi, with standard
round posts. Min output at 700 CCA. Battery tray (max. dim. at
12"lg x 7"wi), hold down straps, battery cables, and battery
charger, is furnished. Installation of (1) starting battery is
required, with possible higher AMP/HR rating, as described
above, if normal environment averages -13°F (-25°C) or cooler.

CERTIFICATIONS

All engines are EPA emergency stationary emissions certified.
All stationary diesel engines are Tier III compliant.

APPLICATION AND ENGINEERING DATA FOR MODEL PJD-1550-60 HZ

COOLING SYSTEM

Type of System	Air to Air, Charged Air Cooler
Coolant Pump	Pre-lubricated, self-sealing
Cooling Fan Type (no. of blades)	Pusher (7)
Fan Diameter inches (cm)	22" (55.9)
Ambient Capacity of Radiator °F (°C).....	125 (51.6)
Engine Jacket Coolant Capacity Qt. (L)	13 (12.3)
Radiator Coolant Capacity Qt. (L).....	24 (22.7)
Water Pump Capacity gpm (L/min).....	48 (181.7)
Heat Reject Coolant: Btu/min (kw)	5324 (93.5)
Air to Air Heat Reject(kw)	1821 (32)
Low Radiator Coolant Level Shutdown.....	Standard

Note: Coolant temp. shut-down switch setting at 220°F (104°C) with 50/50 (water/antifreeze) mix.

COOLING AIR REQUIREMENTS

Combustion Air cfm (m ³ /min)	480 (13.6)
Max Air Intake Restrictions:	
Clean Air Cleaner, H ₂ O (KPa).....	15 (3.75)
Intake Manifold Pressure, Psi (kPa).....	27 (187)
Max. Allowable Temp. Rise, Amb.	
Air to Eng. Inlet, °F (°C)	15 (8)
Max. Temp. out of Charger Air Cooler	
@ 77° F (25°C), Amb. Air °F (°C).....	140 (60)
Radiator Cooling Air, SCFM (m ³ /min).....	8000 (226.5)

EXHAUST SYSTEM

Exhaust Outlet Size.....	4"
Max. Back Pressure in H ₂ O (kpa).....	30 (7.5)
Exhaust Flow, at rated KW, cfm (m ³ /min) ...	1201 (34)
Exhaust Temp, at rated KW, °F (°C).....	941 (505)

SOUND LEVELS MEASURED IN dB(A)

	Open Set
Level 1, Residential Silencer.....	88
Level 2, Critical Silencer	88

Note: Open sets (no enclosure) has (3) optional silencer system choices due to unknown job-site applications. Standard enclosure has installed residential silencer with upgrade to critical or hospital grade silencer. Super-Silent enclosure has installed critical silencer with upgrade to hospital silencer. Sound tests are averaged from several test points and taken at 23 ft. (7 m) from source of noise at normal operation.

DERATE GENERATOR FOR ALTITUDE

3% per 1000 ft.(305 meters) above 3000 ft. (914 meters) from sea level.

DERATE GENERATOR FOR TEMPERATURE

2% per 10°F (12°C) above 85°F (30°C)

DIMENSIONS AND WEIGHTS

	Open Set
Length in (cm).....	106 (270)
Width in (cm).....	32 (81)
Height in (cm).....	56 (142)
1 Ø Net Weight lbs (kg).....	3269 (1483)
1 Ø Ship Weight lbs (kg).....	3429 (1555)
3 Ø Net Weight lbs (kg).....	3209 (1455)
3 Ø Ship Weight lbs (kg).....	3459 (1568)

DEEP SEA 7420 MICROPROCESSOR CONTROLLER



Deep Sea 7420

The “7420” controller is an auto start mains (utility) failure module for single gen-set applications. This controller includes a backlit LCD display which continuously displays the status of the engine and generator at all times.

The “7420” controller will also monitor speed, frequency, voltage, current, oil pressure, coolant temp., and fuel levels. These modules have been designed to display warning and shut down status. It also includes: (11) configurable inputs • (8) configurable outputs • voltage monitoring • mains (utility) failure detection • (250) event logs • configurable timers • automatic shutdown or warning during fault detection • remote start (on load) • engine preheat • advanced metering capability • hour meter • text LCD displays • protected solid state outputs • test buttons for: stop/reset • manual mode • auto mode • lamp test • start button • power monitoring (kWh, kVAr, kVAh, kVArh)

This controller includes expansion features including RS232, RS484 (using MODBUS-RTU/TCP), direct USB connection with PC, expansion optioned using DSENet for remote annunciation and remote relay interfacing for a distance of up to 3300FT. The controller software is freely downloadable from the internet and allows monitoring with direct USB cable, LAN, or by internet via the built in web interface.

STANDARD FEATURES OF PJD SERIES ARE:

Solid State Digital Microprocessor providing automatic engine start-stop; auto shutdown for low oil, high temperature, over speed, under speed, engine fail, engine crank failure (after 3 failed crank attempts); battery charge fail; a “automatic mode off” warning indicator and a built-in (10) second engine start delay and (2) minute engine cool down delay. Timer cycles can be disabled in the field if application requirements so dictate.

STANDARD FEATURES FOR MODEL PJD-1550-60 HZ

STANDARD FEATURES

CONTROL PANEL:

- Deep Sea "7420" digital microprocessor with logic allows programming in the field. Controller has:
- STOP-MANUAL-AUTO modes and automatic engine shutdowns, signaled by full text LCD indicators:
 - Low oil pressure
 - High engine temp
 - Low Radiator Level
 - Three auxiliary alarms
 - Battery fail alarm
 - Engine fail to start
 - Engine over speed
 - Engine under speed
 - Over & under voltage
- Also included is tamper-proof engine hour meter

ENGINE:

- Full flow oil filter • Air filter • Oil pump • Solenoid type starter motor • Hi-temp radiator • Jacket water pump
- Thermostat • Pusher fan and guard • Exhaust manifold
 - Residential Silencer • 12 VDC battery charging alternator
 - Flexible exhaust connector • "Isochronous" duty, electronic governor • Vibration isolators • Closed coolant recovery system with 50/50 water to anti-freeze mixture

AC GENERATOR SYSTEM:

- AC generator • Shunt excited • Brushless design • Direct connection to engine with flex disc • Class H, 180°C insulation • Self ventilated • Drip proof construction

VOLTAGE REGULATOR:

- ½% Voltage regulation • EMI filter • Under-speed protection • Over-excitation protection • total encapsulation

DC ELECTRICAL SYSTEM:

- Battery tray • Battery cables • Battery hold down straps
- 2-stage battery float charger with maintaining & recharging automatic charge stages

Design & specifications subject to change without prior notice. Dimensions shown are approximate. Contact Gillette for certified drawings. DO NOT USE DIMENSIONS FOR INSTALLATION PURPOSES.

